




# FISCHER ULTIMATE™ SERIES

**RUGGED  
COMPACT  
LIGHTWEIGHT**

**2 TO 42  
CONTACTS**

- IP68 / IP69 / Hermetic
- 360° EMC shielding
- High corrosion resistance
- 10,000 mating cycles



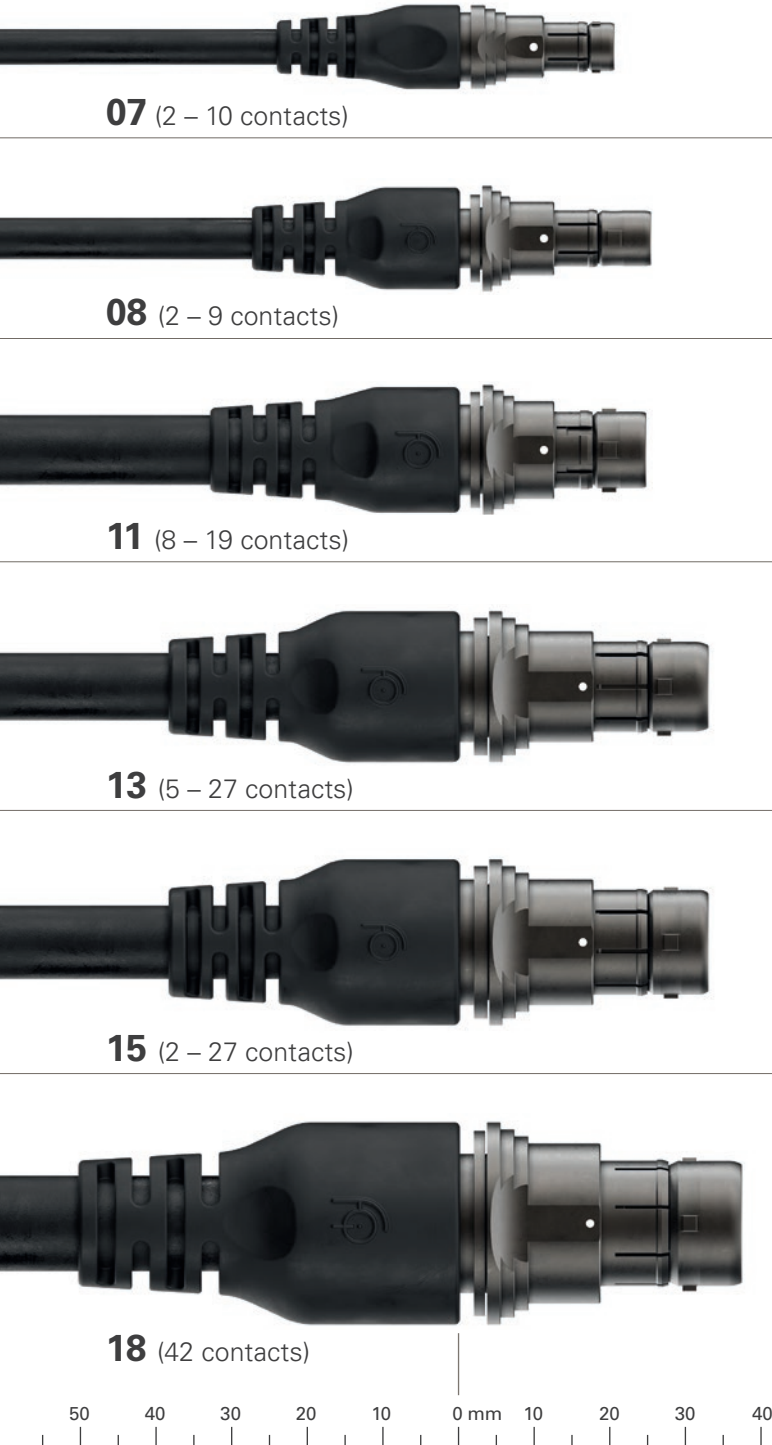

**07** (2 – 10 contacts)

**08** (2 – 9 contacts)

**11** (8 – 19 contacts)

**13** (5 – 27 contacts)

**15** (2 – 27 contacts)

**18** (42 contacts)

\*Actual size 1:1 when printed at full size on A4 paper.

## RESINATED CONTACT BLOCK

- Better sealing (IP68/69 even unmated, gas-tight, NBCR decontamination)
- Greater shock and vibration resistance
- Superior cable resistance (traction)

## PLUGS\*\*

### CABLE MOUNTED



#### BODY STYLES

Locking system	UP01-L Push-pull	UP01-Q Quick-release
Sealing	IP68/IP69	IP68/IP69
Design	Short/Overmolding	Short/Overmolding

### PANEL FRONT MOUNTED



#### BODY STYLES

Locking system	UP50 Non-locking
Sealing	IP68/IP69
Design	Front-projecting

## RECEPTACLES\*\*

### CABLE MOUNTED



#### BODY STYLES

Sealing	UR50 IP68 /IP69
Design	Standard

### PANEL FRONT MOUNTED



#### BODY STYLES

Sealing	UR03 IP68/IP69   Hermetic
Design	Front-projecting

### PANEL REAR MOUNTED



#### BODY STYLES

Sealing	UR01 IP68/IP69   Hermetic	UR02 IP68/IP69   Hermetic
Design	Front-projecting	Rear-projecting

\*\* Available in brass and aluminum.  
Available in anthracite and chrome grey finish.

## BEND RELIEF & CABLE ASSEMBLY

- Bend relief for easy self-assembly, no tool required
- Cable assembly with straight or angled overmolding
- Submersible solution available on demand, 20m and more!



Download the dedicated [Technical Specifications](https://www.fischerconnectors.com/download-center)  
[fischerconnectors.com/download-center](https://www.fischerconnectors.com/download-center)