

ONDULINE EASYLINE

Easy to handle, easy to install and easy to transport...



ONDULINE EASYLINE

Compact corrugated bitumen **roof sheets**. Perfect for waterproofing garden sheds, summerhouses, children's playhouses and animal homes. Can be easily transported in any car and are guaranteed for 10-years. Premium upgrade from standard shed felt.



Easy to install



Lightweight






Eco-friendly



Fast Waterproofing

Technical characteristics

		
ONDULINE RIDGE A100 - 100 x 50 cm	ONDULINE® EASYLINE SHEET- 100 x 76 cm	UNIVERSAL SCREWS 60 mm
45 ridges per pallet	200 sheets per pallet	60 x packs of 100 screws per pallet
60 kgs	460 kg	16 kg

	ONDULINE EASYLINE®
Length	100 cm
Width	76 cm
Corrugation height	38 mm
Weight per sheet	2,2 kg
Weight per m²	2,9 kg
Sheets per pallet	200 pcs
Ridges per pallet	45 pcs
Screws per pallet	60 pcs
Norm	Comply with EN 534 C €



EASY TO TRANSPORT


ONDULINE EASYLINE

DIY roof system for garden buildings

At 100cm by 76cm, **EASYLINE** is a compact roofing system that is perfect for sheds, studios, pet shelters and other garden buildings and annexes. It is available as an attractive free-standing PoS display that is simple to stock on a shop floor and which showcases the roofing sheets, accessories and fixings.

EASYLINE compares favourably to traditional shed felt thanks to its 10-year waterproofing guarantee and ease of installation.

Range of colours available with matching ridges and fixings

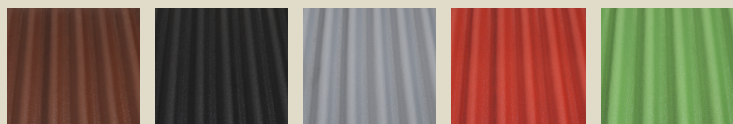

GARDEN SHEDS



SUMMERHOUSES



PLAYHOUSES



Scan to view the installation video!



**Fast
Waterproofing**



**Easy to
install**



**Easy to
install**



**Easy to
install**



Onduline®
Lightweight roofing systems

ONDULINE EASYLINE



Easy to install



Fast Waterproofing




Easy to install



Easy to install



1

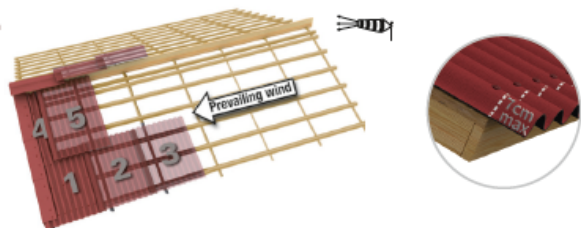


Laying in staggered rows avoids the 4 sheet thicknesses overlapping. Always start your first row below the gutter, leaving a maximum 7 cm overhang.

Begin the second row with half an ONDULINE EASYLINE® sheet (cut lengthwise) and carry on with complete sheets.


2

Sheets must be fixed onto each of their supporting battens.


Every corrugation should be fixed at eaves, overlaps and ridges. Every second corrugation has to be fixed at the intermediate purlin. The fixing at the intermediate purlin has to be staggered.

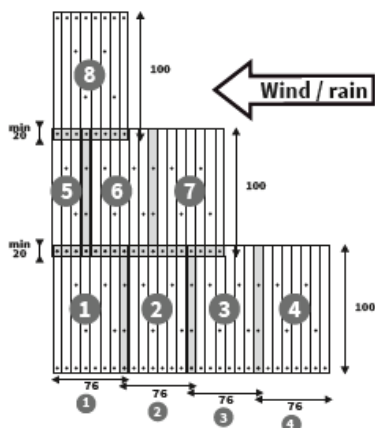

3



The ridge element has to overlap the ONDULINE EASYLINE® sheet min 12 cm.



The ridge elements are fixed in opposite direction to the prevailing winds.

Maintain your roof regularly for better durability: remove vegetation and leaf debris from accessories and main structure, and maintain continuous ventilation.

4

Roof support

Battens rules. The roof pitch and occasional load (especially wind and snow) determine the distance between the battens.

Roof pitches


>5°

>15°

Maximum battens distance




Boarding only (Recommended)




26,7 cm

Minimum end overlap



30 cm



20 cm

Minimum side overlap



2 corrugations



1 corrugation


Effective sheet coverage

0,47 m²

0,53 m²

CALCULATE THE PITCH OF YOUR ROOF

$$\text{Pitch (\%)} = \frac{h}{b} \times 100$$



Onduline®
Lightweight roofing systems



Onduline Building Products Ltd

Dawson House
5 Jewry Street
London
EC3N 2EX

T. +44 (0)207 7270533
E. enquiries@onduline.net



www.onduline.co.uk

Onduline®
Lightweight roofing systems