

BRIMMEL

LIGHTING *your* WAY



SMART PRODUCT CONCEPT

high output up to 600 lm | high quality solar panel | variety of functions



WELL BALANCED RANGE

designs for various taste | choice in materials | wall & garden



GOOD VALUE PERCEPTION

premium perception | private label price | strong promotions



BLENDS IN PERFECTLY

attractive packaging | additional to AC ranges | european design



CONVENIENCE AT YOUR FINGERTIPS

local replenishment | exclusive models | leading in services



SOLAR



MOTION
ACTIVATED




IP44



MAX
600
LUMEN



SPIKE
INCLUDED

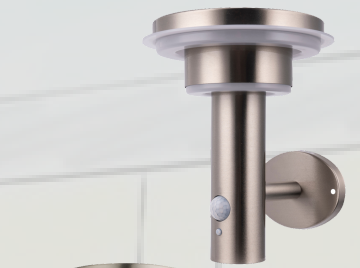

Design	PROMOTA STAINLESS STEEL	Description
Wall	 Productsize: 14.2x12.5x18.8cm	• Solar panel: monocrystalline 0.88W • Battery: Li-ion 3.7V 1200mAh • Smart lighting: - A: standby 20lm - B: standby 20lm + motion 150lmx25s - C: motion 250lmx25s • on/off switch • Motion detection
Medium	 Productsize: 12.5x12.5x50cm	• Detection range: 10±2m • Detection angle: 110°
Tall	 Productsize: 12.5x12.5x80cm	• CE, EMC, IP44 • max. 5W • 20x2835 SMD LED • Charge time: 7-8h • max. 250 lumen

european distribution



info@moralec.com | +32 16 43 83 97 | moralec.com

Design	BARKUDA STAINLESS STEEL	Description	DIKOSA	Description	LUTAMA STAINLESS STEEL	Description
Wall		- Solar panel: monocrystalline - Battery: Li-ion 3.7V 2200mAh - Smart lighting: - A: standby 75lm - B: standby 75lm + motion 400lmx25s - C: motion 600lmx25s - on/off switch - Detection range: max. 8m - Detection angle: 90° - Productsize: 18,5x17,8x22cm		- Solar panel: monocrystalline 1.86W - Battery: Li-ion 18650 3.7V 2200mAh - Smart lighting: - A: standby 60lm - B: standby 60lm + motion 240lmx25s - C: motion 600lmx25s - on/off switch - Detection range: 10±2m - Detection angle: 120° - Productsize: 16.5x15.2x26cm Aluminium - CE, EMC, IP54 - max; 5W 25x2835 SMD LED - Charge time: 6-8h		- Solar panel: monocrystalline 1.8W - Battery: Li-ion 3.7V 2200mAh - Smart lighting: - A: standby 75lm - B: standby 75lm + motion 400lmx25s - C: motion 600lmx25s - on/off switch - Detection range: 6m - Detection angle: 90° - Productsize: 17x16x23cm - CE, EMC, IP54 - max; 5W 25x2835 SMD LED - Charge time: 6-8h
Medium		- Solar panel: monocrystalline - Battery: Li-ion 3.7V 2200mAh - Smart lighting: - A: standby 75lm - B: standby 75lm + motion 400lmx25s - C: motion 600lmx25s - on/off switch - Detection range: max. 8m - Detection angle: 90° - Productsize: 17.8x17.8x45cm 		- Solar panel: monocrystalline 1.86W - Battery: Li-ion 18650 3.7V 2200mAh - Smart lighting: - A: standby 60lm - B: standby 60lm + motion 240lmx25s - C: motion 600lmx25s - on/off switch - Detection range: 10±2m - Detection angle: 120° - Productsize: 15x15x50cm - CE, EMC, IP54 - max; 5W 25x2835 SMD LED - Charge time: 6-8h Aluminium		- Solar panel: monocrystalline 1.8W - Battery: Li-ion 3.7V 2200mAh - Smart lighting: - A: standby 75lm - B: standby 75lm + motion 400lmx25s - C: motion 600lmx25s - on/off switch - Detection range: 6m - Detection angle: 90° - Productsize: 16x16x54cm - CE, EMC, IP54 - max; 5W 25x2835 SMD LED - Charge time: 6-8h 
Tall		- Solar panel: monocrystalline - Battery: Li-ion 3.7V 2200mAh - Smart lighting: - A: standby 75lm - B: standby 75lm + motion 400lmx25s - C: motion 600lmx25s - on/off switch - Detection range: max. 8m - Detection angle: 90° - Productsize: 17.8x17.8x85cm 		- Solar panel: monocrystalline 1.86W - Battery: Li-ion 18650 3.7V 2200mAh - Smart lighting: - A: standby 60lm - B: standby 60lm + motion 240lmx25s - C: motion 600lmx25s - on/off switch - Detection range: 10±2m - Detection angle: 120° - Productsize: 15x15x80cm - CE, EMC, IP54 - max; 5W 25x2835 SMD LED - Charge time: 6-8h Aluminium		- Solar panel: monocrystalline 1.8W - Battery: Li-ion 3.7V 2200mAh - Smart lighting: - A: standby 75lm - B: standby 75lm + motion 400lmx25s - C: motion 600lmx25s - on/off switch - Detection range: 6m - Detection angle: 90° - Productsize: 16x16x94cm - CE, EMC, IP54 - max; 5W 25x2835 SMD LED - Charge time: 6-8h 

Design	TRAVISIA	Description	WALEDA STAINLESS STEEL	Description	ZAKRIBA STAINLESS STEEL	Description
Wall		- Solar panel: monocrystalline 2.1W - Battery: Li-ion 18650 3.7V 2600mAh - Smart lighting: - A: standby 60lm - B: standby 60lm + motion 240lmx25s - C: motion 600lmx25s - on/off switch - Detection range: 10±2m - Detection angle: 120° - Productsize: 18,8x12,3x8cm Aluminium - CE, EMC, IP44 - max; 5W 25x2835 SMD LED - Charge time: 6-8h		- Solar panel: monocrystalline 1.86W - Battery: Li-ion 18650 3.7V 2600mAh - Smart lighting: - A: standby 60lm - B: standby 60lm + motion 240lmx25s - C: motion 600lmx25s - on/off switch - Detection range: 10±2m - Detection angle: 120° - Productsize: 17.5x16x23.5cm - CE, EMC, IP44 - max; 5W 60x2835 SMD LED - Charge time: 6-8h		- Solar panel: monocrystalline 1.8W - Battery: Li-ion 3.7V 2600mAh - Smart lighting: - A: standby 60lm - B: standby 60lm + motion 240lmx25s - C: motion 600lmx25s - on/off switch - Detection range: 10±2m - Detection angle: 120° - Productsize: 17.3x16.5x15.5cm - CE, EMC, IP44 - max. 5W 60x2835 SMD LED - Charge time: 6-8h
Medium		- Solar panel: monocrystalline 2.1W - Battery: Li-ion 18650 3.7V 2600mAh - Smart lighting: - A: standby 60lm - B: standby 60lm + motion 240lmx25s - C: motion 600lmx25s - on/off switch - Detection range: 10±2m - Detection angle: 120° - Productsize: 18,8x13,5x50cm - CE, EMC, IP44 - max; 5W 25x2835 SMD LED - Charge time: 6-8h Aluminium 		- Solar panel: monocrystalline 1.86W - Battery: Li-ion 18650 3.7V 2600mAh - Smart lighting: - A: standby 60lm - B: standby 60lm + motion 240lmx25s - C: motion 600lmx25s - on/off switch - Detection range: 10±2m - Detection angle: 120° - Productsize: 16x16x50m - CE, EMC, IP44 - max; 5W 60x2835 SMD LED - Charge time: 6-8h 		- Solar panel: monocrystalline 1.8W - Battery: Li-ion 3.7V 2600mAh - Smart lighting: - A: standby 60lm - B: standby 60lm + motion 240lmx25s - C: motion 600lmx25s - on/off switch - Detection range: 10±2m - Detection angle: 120° - Productsize: 16x16x50cm - CE, EMC, IP44 - max. 5W 60x2835 SMD LED - Charge time: 6-8h 
Tall		- Solar panel: monocrystalline 2.1W - Battery: Li-ion 18650 3.7V 2600mAh - Smart lighting: - A: standby 60lm - B: standby 60lm + motion 240lmx25s - C: motion 600lmx25s - on/off switch - Detection range: 10±2m - Detection angle: 120° - Productsize: 18,8x13,5x80cm - CE, EMC, IP44 - max; 5W 25x2835 SMD LED - Charge time: 6-8h Aluminium 		- Solar panel: monocrystalline 1.86W - Battery: Li-ion 18650 3.7V 2600mAh - Smart lighting: - A: standby 60lm - B: standby 60lm + motion 240lmx25s - C: motion 600lmx25s - on/off switch - Detection range: 10±2m - Detection angle: 120° - Productsize: 16x16x80m - CE, EMC, IP44 - max. 5W 60x2835 SMD LED - Charge time: 6-8h 		- Solar panel: monocrystalline 1.8W - Battery: Li-ion 3.7V 2600mAh - Smart lighting: - A: standby 60lm - B: standby 60lm + motion 240lmx25s - C: motion 600lmx25s - on/off switch - Detection range: 10±2m - Detection angle: 120° - Productsize: 16x16x80cm - CE, EMC, IP44 - max. 5W 60x2835 SMD LED - Charge time: 6-8h 