

Call today:


UK: +44 (0) 1270 895344

IE: +353 (0) 15543922

NZ: +64 21270188

SI: +386 30 238 480

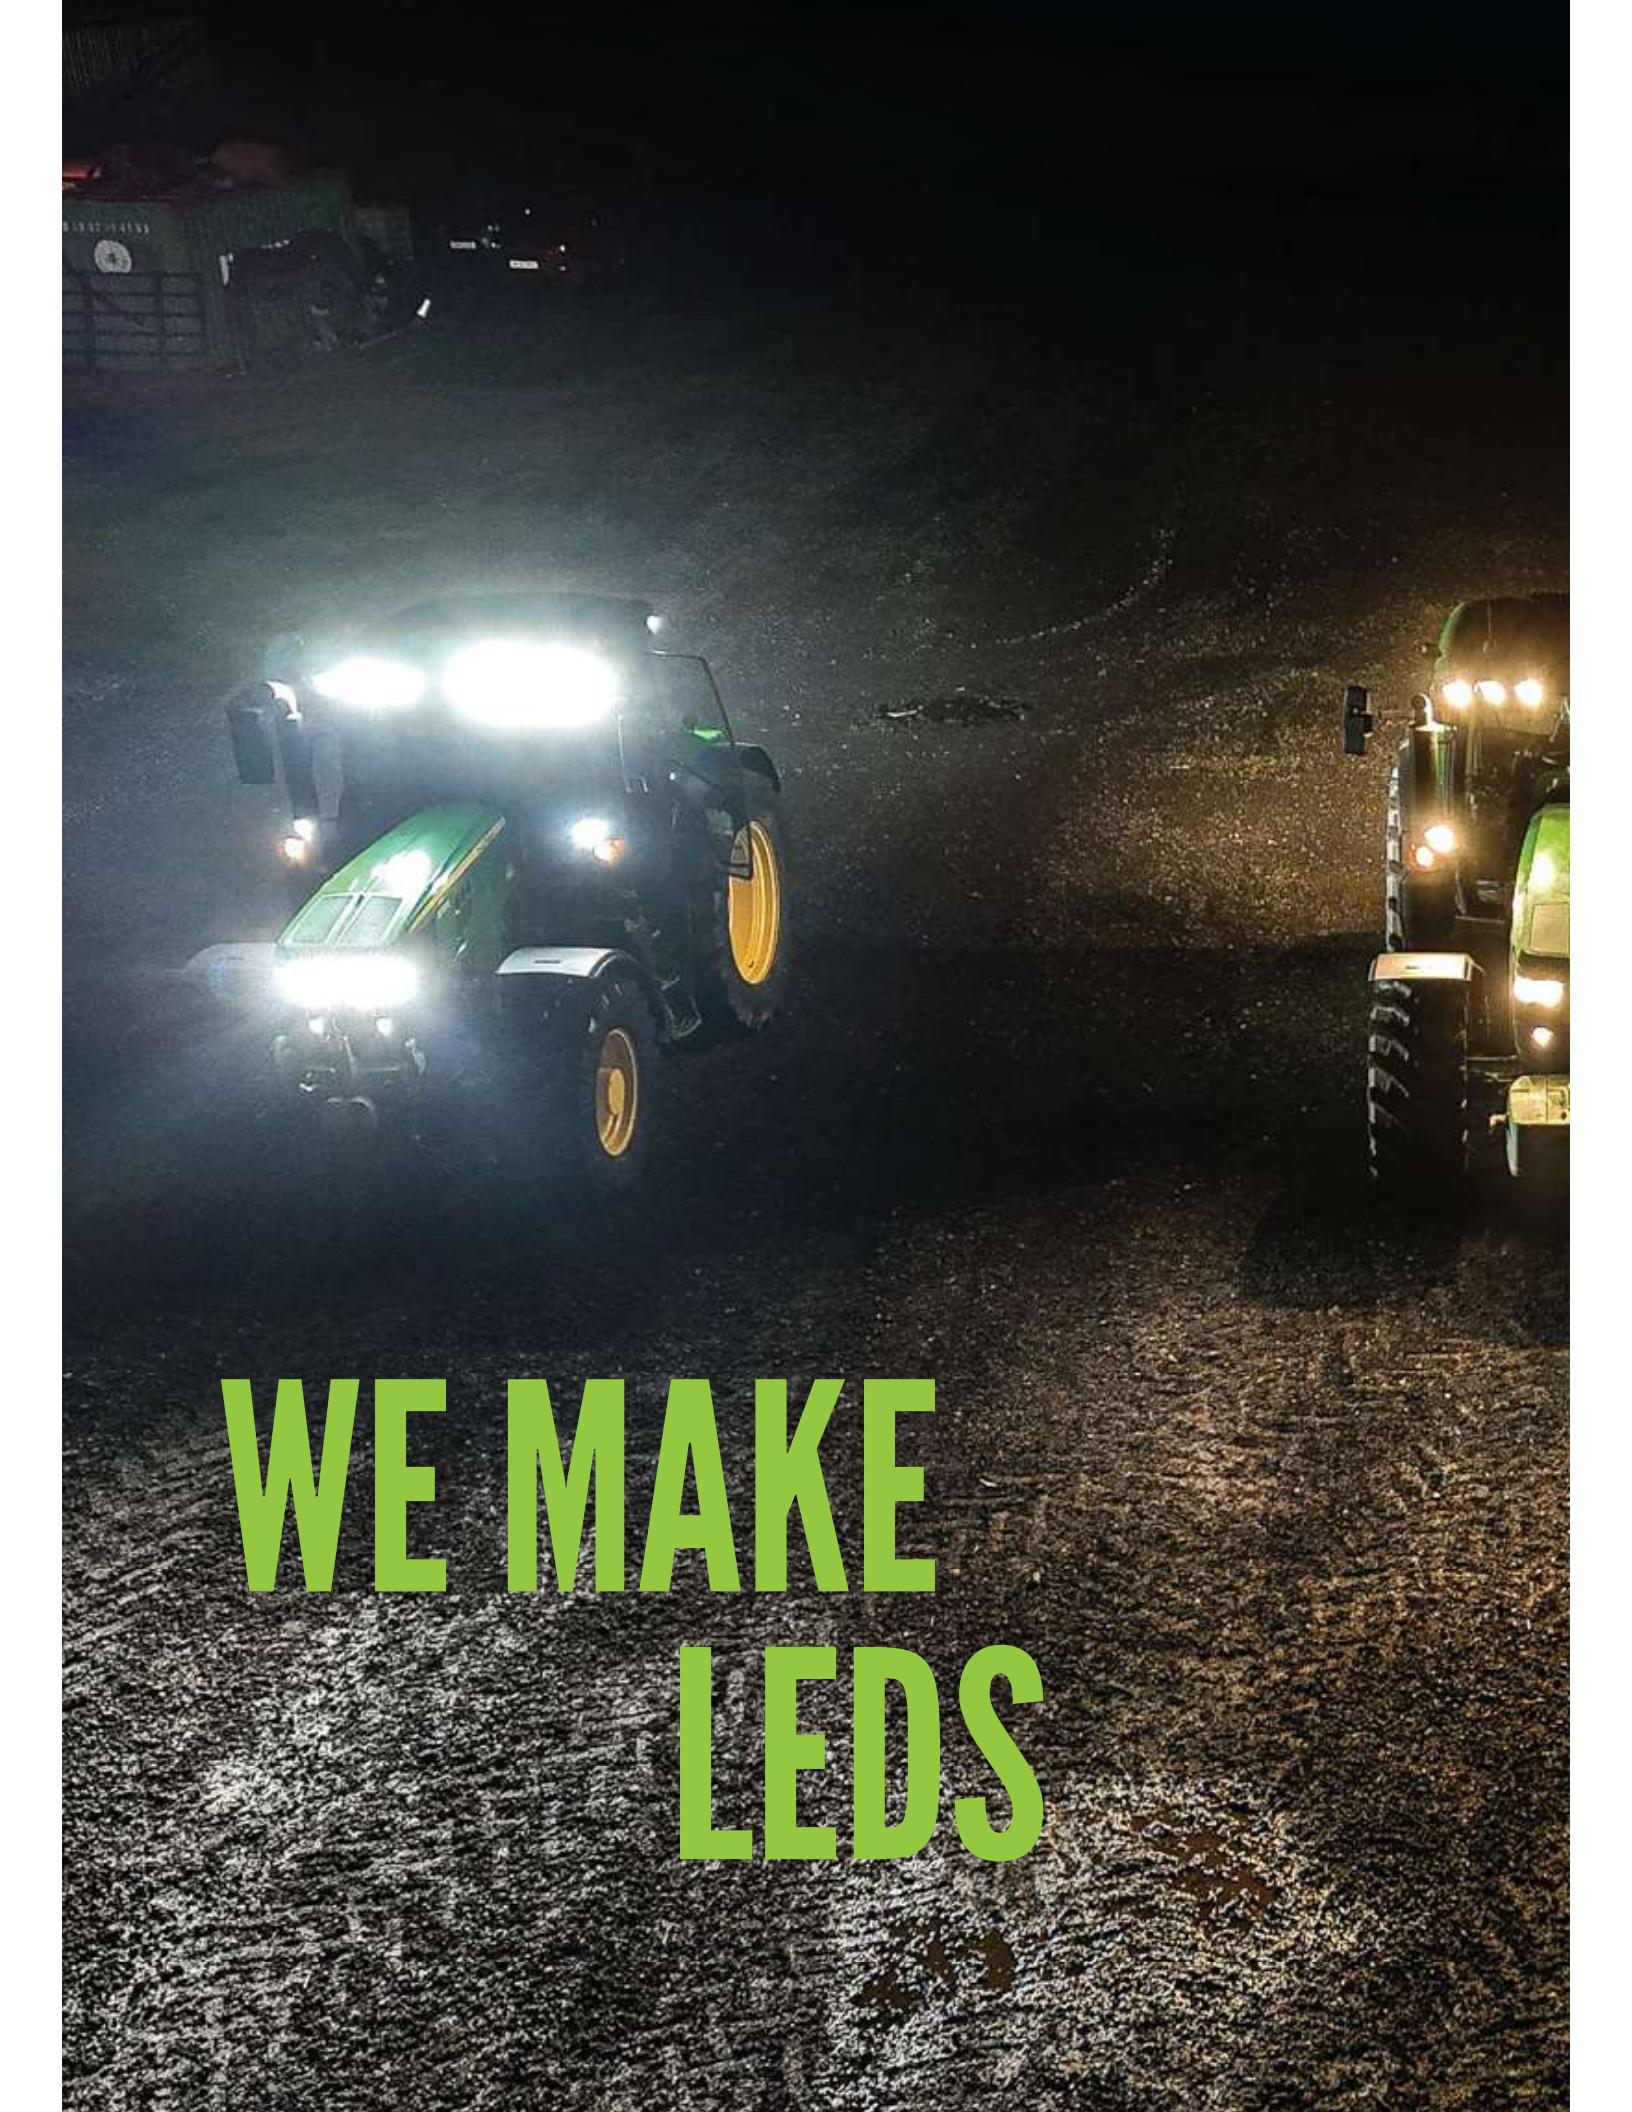

A tractor with its headlights on is working in a field at night. The field is dark and appears to be a mix of soil and crop residue. The tractor's headlights illuminate the immediate area around it, creating a bright glow. The tractor is positioned in the center-left of the frame, facing towards the left. The background is dark, suggesting it is nighttime.

WE MAKE
LEDS

THEY MAKE TRACTORS





Founded in 2013, UTV Products has expanded to become the UK's leading brand in LED lighting - with growing international recognition.

Specialising in providing agricultural, forestry and construction sectors with LED lighting solutions, UTV Products prioritises both safety and quality at work. Therefore, all products are manufactured to an exceptionally high standard as per ISO9001 International quality standards and advanced quality testing procedures.

Managing director, Ben Bonell, has a vast background in aviation electronics engineering. Therefore, understands the importance of upholding confidence in electronic equipment; and is committed to promoting the same quality, innovation and professionalism in UTV Products.

CONTENTS

Our Story	p. 1-4
New Holland	p. 5-7
John Deere	p. 8-10
Fendt	p. 11-12
Massey Ferguson	p. 13-14
Valtra	p. 15-16
Case IH	p. 17-19
JCB	p. 20-21
Claas	p. 22
Merlo	p. 23
SDF and Lamborghini	p. 24-25
Universal Headlights	p. 26-27
Universal Lights	p. 28-29
Coloured Lights	p. 30
Driving Lights	p. 31
Lightbars	p. 32
Tail Lights	p. 33-34
Safety Perimeter Lights	p. 35
Marker Lights	p. 36-37
Beacons	p. 38
Strobes	p. 39
Wiring Looms and Accessories	p. 40
New Products	p. 41-42




UTV
products
LED LIGHTING



OUR STORY

We are excited to announce our expansion into custom-made stainless steel bars designed to fit a variety of machines. This new brand division, supported by specialist expertise and advanced Research and Design processes, reinforces our dedication to innovation and excellence. Welcome to the LED revolution with UTV Products, where we deliver exceptional lighting solutions and understand the demanding environments you work in.

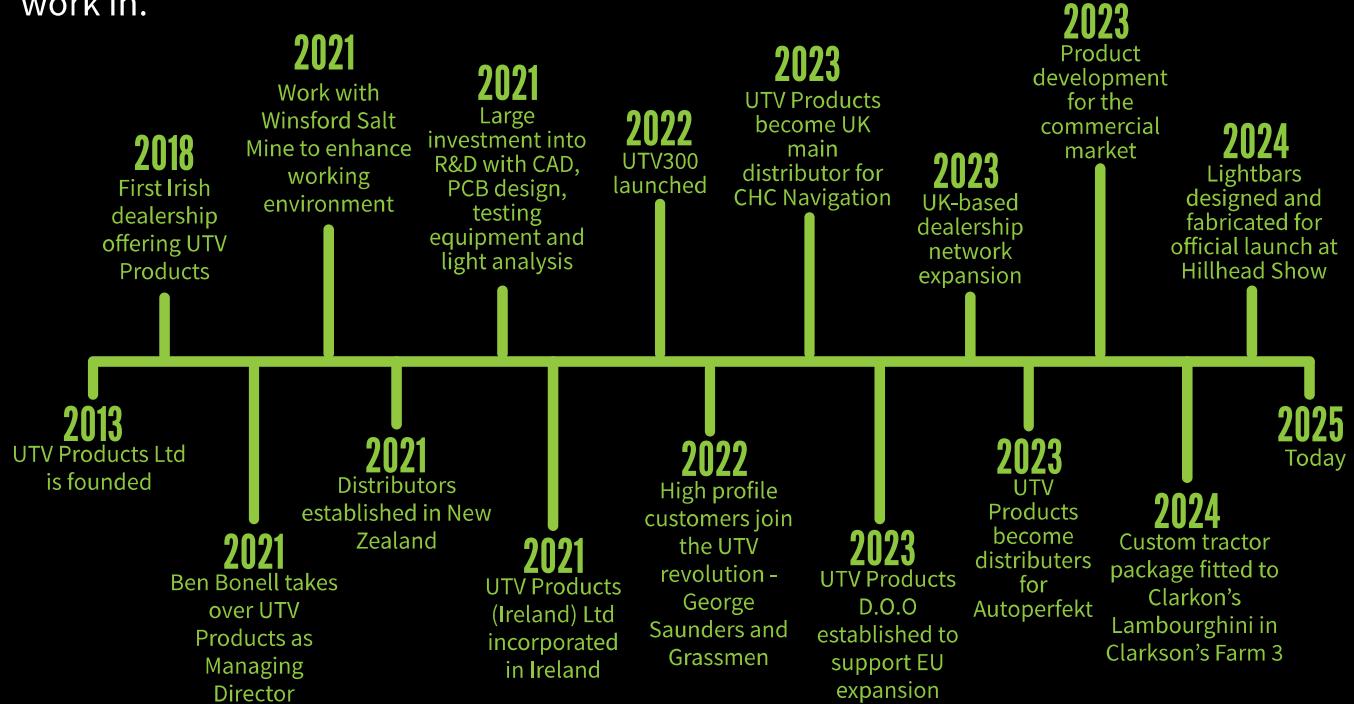

YOUR DESIGN JOURNEY

Working with you every step of the way.

1. Consultation and Conceptualisation

We start with a detailed consultation to understand your needs and vision.

2. Detailed Design and Engineering

Our engineers can use CAD software to create precise models of required brackets and fixtures, ensuring every detail is meticulously planned.

3. Selecting the Right LEDs

We guide you in selecting the best LEDs for your lightbar, considering factors like power, colour temperature and flash patterns.


4. Fabrication and Finishing

Skilled craftsmen cut, bend and weld components as planned, before the bars are sent to be finished with a high-quality powder coat.

5. Delivery and Installation

We offer fitment at our workshop and trusted delivery postage options.

TOP PICKS

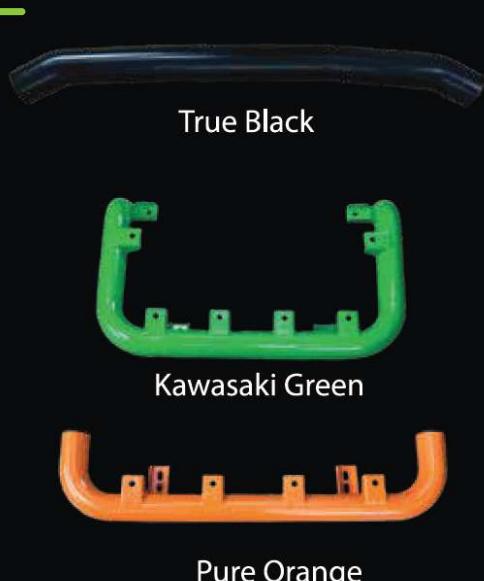

UNLIMITED
POWDER
COAT
COLOUR
OPTIONS

THE FINER DETAILS

Powder Coating

We understand the importance of high-quality fabrication and high-quality finishes. That is why we use a powder-coat finish in a range of colours for you to choose from, whether you want a safety-focused lightbar or prefer a more stealthy appearance.

Powder coating provides a durable, attractive and even finish to your lightbar. This acts as a long-lasting, low maintenance, colourful covering for all types of steel fabrication work - perfect for machines that operate within harsh environments.



NEW HOLLAND



UTV300

Low beam: 30W
 High beam: 30W
 Halo DRL: 12W
 Voltage: 9 - 36V
 Waterproof and Dustproof: IP68
 EMC CISPR25 Class 4
 Durable polycarbonate lens
 Over/Under voltage protection
 Not suited to N/H T6
 Dimensions: 90x90x141mm



UK, IE and NZ Road legal -
 LHD version available upon request

UTV3004

Power: 4x10 CREE LED (x2)
 Lumens: 3200 per light
 Voltage: 9 - 32V
 Waterproof and Dustproof: IP68
 Durable polycarbonate lens
 Stainless steel hardware
 Dimensions: 85x85x50mm
 *Suitable for NH 60 Series and TM
 *Lights only to fit in original housing



UTV374K - TM, 40 and 60 Series

UTV375K - TS Series
 UTV376K - TL, L and Super Steer
 UTV387K - G and 70 Series Genesis

Low beam: 30W
 High beam: 60W
 DRL: 6W
 Voltage: 9 - 32V
 Waterproof and Dustproof: IP68
 Stainless steel hardware
 Over/Under voltage protection
 UK, IE and NZ Road legal -
 LHD version available upon request



UTV337-1K

UTV390

Low beam: 30W, 2,250lm
 High beam: 50W, 3,750lm
 DRL: 6W
 Voltage: 9 - 32V DC
 Operation Temperature: -40°C to 85°C
 Waterproof and Dustproof: IP68
 Colour Temperature: 6000K
 EMC: CISPR 25 Class 4
 Die-cast aluminum housing
 Durable polycarbonate lens
 UK, IE and NZ Road legal -
 LHD version available upon request



UTV337-1K



UTV390

UTV352K Pair UTV353K Pair

Power: 4x10W CREE LED
 Lumens: 3200LM
 Voltage: 9 - 32V
 Waterproof and Dustproof: IP68
 EMC: CISPR 25 Class 4
 Durable Polycarbonate Lens
 Stainless steel hardware
 Over/Under voltage protection
 Dimensions: 85x85x50mm
 For Tier 4B machine, 2016 onwards





UTV347K Pair

Power: 4x10 CREE LED (x2)
Lumens: 3200 per light
Voltage: 9 - 32V
Waterproof and Dustproof: IP68
EMC: CISPR 25 Class 4
Durable polycarbonate lens
Stainless steel hardware
Dimensions: 85x85x50mm
*Lights only to fit in original housing

UTV333 Pair

Power: 5x5W CREE LED (x2), 9x5W CREE LED (x2)
Low beam: 30W
High beam: 50W
Lumens: 22400LM (pair)
Voltage: 9-32V
Waterproof and Dustproof: IP68
EMC: CISPR25 CLASS 4
UK, IE and NZ Road legal -
LHD version available upon request



UTV337-3K

Low beam: 30W, 2,250lm
High beam: 50W, 3,750lm
DRL: 6W
Voltage: 9 - 32V DC
Dimensions:
132mm (lens diameter)
140mm (light diameter)



UTV310

Lumens: 3200LM
Power: 4x10W (40W)
Voltage: 9 - 32V
Waterproof and dustproof: IP68
EMC CISPR 25 Class 4
Durable polycarbonate lens
Stainless steel hardware
Over/Under voltage protection



*DT Connector

UTV366:

Lumens: 3200LM
Voltage: 9 - 32V
Power: 8x5W CREE LED
Waterproof and Dustproof: IP68
EMC CISPR 25 Class 4
Durable polycarbonate lens
Stainless steel hardware
Over/Under voltage protection
Dimensions: 152x72x61mm



UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

UTV315: 40W, 3600LM

UTV312: 80W, 6400LM

Voltage: 9 - 32V - Waterproof and Dustproof: IP68
Swivel Mount - Over/Under voltage protection
EMC CISPR25 Class 4 - Durable polycarbonate lens
Dimensions: 151x92x79mm



Side and centre mount

UTV305: 40W, 3600LM

UTV306: 80W, 6400LM

Voltage: 9 - 32V - Waterproof and Dustproof: IP68
Swivel Mount - Over/Under voltage protection
EMC CISPR25 Class 4 - Durable polycarbonate lens
Dimensions: 142x60x126mm



Side and centre mount

UTV3015

T6000 New Holland Full Headlight

Contains: UTV300 & UTV323

UTV300

Low beam: 30W
High beam: 30W
Halo DRL: 12W
Voltage: 9 - 36V
Waterproof and Dustproof: IP68
EMC CISPR25 Class 3
Durable polycarbonate lens
over/Under voltage protection
Not suited to N/H T6
Dimensions: 90x90x141mm



UTV323

Power: 40W
Lumens: 3200 actual lumens
Suitable 9 - 32vdc
Waterproof and Dustproof: IP68
EMC CISPR25 Class 4
Durable polycarbonate lens
over/Under voltage protection
Dimensions: 3.37 inch (85.5mm) diameter x 2 inch (50mm) depth
Flood beam

JOHN DEERE



John Deere R Series and M Series

UTV358

60W, 4800LM Flush Fit LED Work Light



UTV359

60W, 4800LM LED Work Light

EMC CISPR25 Class 4

Voltage 9 - 32v

360 degree swivel mount on UTV359

Direct Plug-and-play

Overheat protection

Reverse polarity protected

IP68 waterproof



UTV613

Pole Mounted Amber Beacon
CANBUS Free

3 Flash patterns including rotating

Designed to operate with the CAN BUS on but not limited to the following machines:
John Deere – R-Series and 30 series



UTV356 60W High Beam

Lumens: 4500LM

Voltage: 9 - 32V

Waterproof and dustproof: IP68

EMC CISPR 25 Class 4



UTV355 30W Low Beam

Lumens: 2250LM

Voltage: 9 - 32V

Waterproof and dustproof: IP68

EMC CISPR 25 Class 4



UK, IE and NZ Road legal -

LHD version available upon request

UTV323 40W Work Light

Lumens: 3,200LM

Voltage: 9 - 32V

Waterproof and dustproof: IP68

EMC CISPR 25 Class 4



UTV337-2K

Low beam: 30W, 2,250lm

High beam: 50W, 3,750lm

DRL: 6W

Voltage: 9 - 32V DC



UTV330-5K

Lumens: 3,200LM

Voltage: 9 - 32V

Waterproof and dustproof

EMC CISPR 25 Class 4

Plug-and-play



UTV335K

Low beam: 30W, 2250LM

High beam: 50W, 3750LM

30 Series Premium Only

UK, IE and NZ Road legal -
LHD version available upon request

UTV346

Power: 4x10W Osram LED

Lumens: 3200LM

John Deere R Series, M Series and 30 Series

John Deere 20 Series and 30 Series

UTV344
(60W) 4800LM



UTV343
(80W) 6400LM



UTV354
(60W) 4800LM

UTV345
(80W) 6400LM

Voltage: 9 - 32V
EMC: CISPR 25 Class 4
Durable Polycarbonate Lens
Stainless steel hardware

UTV380K - 20 and 30Std Series

Low beam: 30W
High beam: 60W
DRL: 6W
Voltage: 9 - 32V
Waterproof and dustproof: IP68
UK, IE and NZ Road legal -
LHD version available upon request



UTV3003
40W, 3200LM LED
Made specifically for
6020/6030 Std



UTV326

Power: 4x10W CREE LED
Lumens: 3200LM
Voltage: 9 - 32V
Waterproof and dustproof



UTV379K - 00 and 10 Series

Low beam: 30W
High beam: 60W
DRL: 6W
Voltage: 9 - 32V



UTV379K

UTV3001

40W, 3200LM LED
Made specifically for 6000/6010 Series



John Deere 10 Series

UTV315: 40W, 3600LM

UTV312: 80W, 6400LM

Voltage: 9 - 32V - Waterproof and
dustproof: IP68 - Swivel mount -
Over/Under voltage protection -
EMC CISPR25 Class 4 - Durable
polycarbonate lens

Side and
centre mount



UTV Products state actual lumen values whereas other manufacturers state raw
lumen values which can never be achieved.

UTV318

Power: 4x5W CREE LED
Lumens: 3600 LM
Voltage: 9 - 32V
Waterproof and dustproof: IP68
EMC: ECE-R10
Durable polycarbonate lens
Dimensions: 138x62x38mm



UTV3029

130mm Headlight For John Deere M Series



UTV393K

Low beam: 30W 2250LM
High beam: 50W 3750LM
DRL: 6W
Voltage: 9 - 32V DC
*Surround not included



UK, IE and NZ
Road legal - LHD
version available
upon request

UTV303

18W, 1440LM LED
60° flood beam
Plug-and-play



Designed for 40,
50 and 55 series



Low beam: 30W, 2250 actual lumens
High beam: 50W, 3750 actual lumens
9W DRL
Voltage: 9-32V DC
EMC: CLSPR25 CLASS 4
Waterproof & Dustproof: IP69K

Designed for M series

UTV3021

60W, 4,800LM

UTV3022

90W, 7,200LM

UTV3023

120W, 9,600LM



UTV3021: 60W, 4800LM

UTV3022: 90W, 7200LM

UTV3023: 120W, 9600LM

Voltage: 9-32V DC

Waterproof and dustproof: IP68

Die-cast aluminum housing

Durable polycarbonate lens

Over voltage protection

ECE-R10 approved

EMC CISPR 25 Class 4

UTV341

UTV341 - 80W

8x5W CREE, 3200LM

8x10W CREE, 6400LM

Voltage: 9-32V

Waterproof and dustproof: IP68

EMC: CISPR 25 Class 4

Over/Under voltage protection

Dimensions: 184x102x65mm



UTV350K Pair

Low beam: 30W 24000LM

High beam: 60W 4800LM

DRL: 12W

Voltage: 9-32V DC

Operation temperature:

-40°C to 85°C

Colour temperature: 6000K

Waterproof and dustproof: IP68

EMC: CISPR 25 Class 4

Durable polycarbonate lens

UTV3012

Power: 45W, 4000LM

Voltage: 9-32V

Built-in DT Connector

Swivel mounting bracket


Waterproof & dustproof: IP68

Die-cast aluminium housing

Durable polycarbonate lens



UTV392K

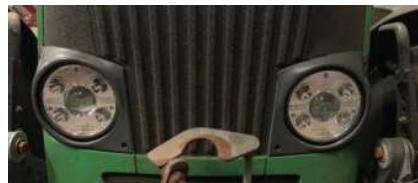

UTV394K

Low beam: 30W 2250LM

High beam: 50W 3750LM

DRL: 6W

Voltage: 9-32V DC

Operation temperature: -40°C to 85°C

Colour temperature: 6000K

Waterproof and dustproof: IP68

EMC: CISPR 25 Class 4

Die-cast aluminum housing

Durable polycarbonate lens

UK, IE and NZ Road legal -

LHD version available upon request

UTV344 (60W) 4800LM

UTV343 (80W) 6400LM

Voltage: 9-32V

Waterproof and dustproof: IP68

EMC: CISPR 25 Class 4

Over/Under voltage protection

Durable polycarbonate lens

Stainless steel hardware

Dimensions: 108x114x75mm





UTV300-2K Bonnet Headlight Kit UTV300-3K Highlevel Headlight Kit UTV300-4K Bonnet and Highlevel Headlight Kit



UK, IE and NZ Road legal - LHD version available upon request

Low beam: 30W 2100LM
High beam: 30W 2400LM
DRL: 12W
Voltage: 9-32V DC
Waterproof and dustproof: IP68
EMC: CISPR 25 Class 4
Durable polycarbonate lens
Over/Under voltage protection
Dimensions: 90x90x141mm

UTV315: 40W, 3600LM

UTV312: 80W, 6400LM

Voltage: 9 - 32V
Waterproof and Dustproof: IP68
Swivel Mount
Over/Under voltage protection
EMC CISPR25 Class 4
Durable polycarbonate lens
Dimensions: 151x92x79mm

*For Vario TMS models UTV833 is required.



Side and centre mount

UTV3044

40W LED corner work light
40W, 3200 actual Lumens
Plug-and-play
Zero radio interference
Maintains OEM appearance

Suitable for:
Fendt 900 Series Vario
TMS 916, 920, 924, 926, 930



UTV325 60W Flood

UTV324 60W Spot

Lumens: 3200LM/4800LM/4800LM
Voltage: 9-32V
Waterproof and dustproof: IP68
EMC CISPR 25 Class 4
Over/Under voltage protection
Dimensions: 85x85x50mm

To suit top front cab



UTV321

Power: 4x10W CREE LED
Lumens: 3600LM
Voltage: 9-32V
Waterproof and dustproof: IP68
Over/Under voltage protection
Die-cast aluminum housing
Durable polycarbonate lens
60°c flood beam
To suit bonnet row finder light

UTV386K

LED headlight kit
14000 actual lumen as a pair
Plug-and-play
Zero radio interference
Maintains OEM appearance
*Suitable for Fendt 900 series TMS

UK, IE and NZ Road legal -
LHD version available upon
request

MASSEY FERGUSON



UTV325 60W Flood

UTV324 60W Spot

Lumens: 4800LM

Voltage: 9-32V

Waterproof and dustproof: IP68

Durable polycarbonate lens

Stainless steel hardware

EMC: CISPR 25 Class 4

Over/Under voltage protection



UK, IE and NZ Road legal -
LHD version available upon request

UTV330-1K

Massey Ferguson
6600/7600/6700/
7700/6700S/7700S
/6S/7S

UTV330-2K

Massey Ferguson
5600/5700/5700SL

UTV330-3K

Massey Ferguson 55

UTV330-4K

Massey Ferguson 85



Low beam: 30W, 2100LM

High beam: 60W, 4200LM

DRL: 6W

Voltage: 9 - 32V DC



UTV300-5K - Suitable for tractors with a separate main beam

UTV300 - Suitable for tractors with combined high and low beam



UTV300-5K

UTV300

Low beam: 30W 2100LM

High beam: 30W 2400LM

DRL: 12W

Voltage: 9-32V DC

Waterproof and dustproof: IP68

EMC: CISPR 25 Class 4

Durable polycarbonate lens

Over/Under voltage protection

Dimensions: 90x90x141mm



Side and centre mount

UTV305: 40W, 3600LM

UTV306: 80W, 6400LM

Voltage: 9 - 32V DC

Swivel mount

Waterproof and Dustproof: IP68

EMC: CISPR 25 Class 4

Durable polycarbonate lens

Stainless steel hardware

Over/Under voltage protection

Dimensions: 142x60x126mm



UTV327

Power: 6x10W 60W

Lumens: 4800LM

Voltage: 9 - 36V

Swivel mounting bracket

Waterproof and dustproof: IP68

EMC CISPR25 Class 4

Durable polycarbonate lens

Over/Under voltage protection



UTV520

Massey Ferguson round LED tail light with load resistor

Functions:

Side light,

indicator and brake



UK, IE and NZ Road legal - LHD version available upon request



UTV336

Low beam: 30W, 2250LM
High beam: 50W 3750LM
DRL: 6W
Voltage: 9 - 32V DC
Colour temperature: 6000K
Waterproof and dustproof: IP68
EMC: CISPR 25 Class 4
Die-cast aluminum housing
Durable polycarbonate lens
UK, IE and NZ Road legal -
LHD version available upon request



UTV395

Massey Ferguson 200 & 600 Series Headlight
Low beam: 30W, 2250 Lumen
High beam: 50W, 3750 Lumen
EMC: CISPR25 Class 4
Voltage: 9-32V DC
3 Tab OEM fixing point
RHD approvals R112, R7



Side
and
centre
mount



UTV315: 40W, 3600LM

UTV312: 80W, 6400LM
Voltage: 9 - 32V
Waterproof and Dustproof: IP68
Swivel Mount
Over/Under voltage protection
EMC CISPR25 Class 4
Durable polycarbonate lens
Dimensions: 151x92x79mm

UTV371K - 300, 3000, 3100 and 3600 Series UTV372K - 4200, 4300, 6200 and 8200 Series UTV373K - 6100 and 8100 Series

Low beam: 30W
High beam: 60W
DRL: 6W
Voltage: 9 - 32V
Waterproof and dustproof: IP68
Stainless steel hardware
Over/Under voltage protection
UK, IE and NZ Road legal -
LHD version available upon request



UTV341

UTV341 - 80W

8x5W CREE, 3200LM
8x10W CREE, 6400LM
Voltage: 9-32V
Waterproof and dustproof: IP68
EMC: CISPR 25 Class 4
Over/Under voltage protection
Dimensions: 184x102x65mm

To
suit
top
front
cab



UTV342

40W, 3200LM
Adjustable tilt
Flood beam
Voltage: 9-36V DC
EMC to CISPR25 Class 4
Overheat protection

UTV521

Massey Ferguson rectangular LED tail light with resistor
Functions: Side light, indicator and brake light



UTV403

Side light suitable for Massey Ferguson
Functions: Side light and indicator

UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

UTV377

Low beam: 30W, 2100LM

High beam: 60W, 4200LM

DRL: 12W, 800LM

Voltage: 9-32V

Waterproof and dustproof: IP68

EMC: CISPR 25 Class 4

Durable polycarbonate lens

Over/Under voltage protection

*For generation 1, 2 and 3 N and T Series



UK, IE and NZ Road legal - LHD version available upon request



UK, IE and NZ Road legal -
LHD version available upon request

UTV381K - 00 and 50 Series

Low beam: 30W

High beam: 60W

DRL: 6W

Voltage: 9 - 32V

Waterproof and dustproof: IP68

Stainless steel hardware

Over/Under voltage protection

UTV315: 40W, 3600LM

UTV312: 80W, 6400LM

Voltage: 9 - 32V

Waterproof and Dustproof: IP68

Swivel Mount

Over/Under voltage protection

EMC CISPR25 Class 4

Durable polycarbonate lens

Dimensions: 151x92x79mm

Side and centre mount



UTV3021

60W, 4,800LM

UTV3022

90W, 7,200LM

UTV3023

120W, 9,600LM



UTV3021: 60W, 4800LM

UTV3022: 90W, 7200LM

UTV3023: 120W, 9600LM

Voltage: 9-32V DC

Waterproof and dustproof: IP68

Die-cast aluminum housing

Durable polycarbonate lens

Over voltage protection

ECE-R10 approved

EMC CISPR 25 Class 4

UTV367
40W, 4x10W



UTV368
60W, 4x15W



UTV369
90W, 6x15W



Power: 3200LM/4800LM/7200LM
Voltage: 9 - 32V DC
Colour temperature: 6000K
Waterproof and dustproof: IP68
EMC CISPR25 Class 4
Swivel mounting bracket
Durable polycarbonate lens
Stainless steel hardware
Die-cast aluminum housing
E-mark: ECE-R10

UTV301

Power: 6x10W Osram LED
Lumens: 4800LM
Voltage: 9-32V
Waterproof and dustproof: IP68
EMC: CISPR 25 Class 4
Durable polycarbonate lens
Stainless steel hardware
Over/Under voltage protection
Dimensions: 100x117x77mm



UK, IE and NZ
Road legal -
LHD
version
available
upon
request

UTV401

Power: 1W
Voltage: 9 -32V DC
Colour temperature:
white and amber
Waterproof and dustproof: IP68
Die-cast aluminum housing
Durable polycarbonate lens



Side light and indicator

UTV300

Low beam: 30W 2100LM
High beam: 30W 2400LM
DRL: 12W
Voltage: 9-32V
Waterproof and dustproof: IP68
EMC: CISPR 25 Class 4
Durable polycarbonate lens
Over/Under voltage protection
Dimensions: 90x90x141mm

UTV334K

Lights included: UTV324 (x2) and UTV334 (x2)

Power: 60W LED
Lumens: 4800LM
Voltage: 9-32V
Waterproof and dustproof: IP68
EMC: CISPR 25 Class 4
Over/Under voltage protection

UK, IE and NZ Road legal -
LHD version available upon request

UTV334

UTV324



UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

CASE-IH



UTV310

Lumens: 3200LM
 Power: 4x10W Osram LED (40W)
 Voltage: 9 - 32V
 Waterproof and dustproof: IP68
 EMC CISPR 25 Class 4
 Durable polycarbonate lens
 Stainless steel hardware
 Over/Under voltage protection
 Dimensions: 85x85x50mm

*DT Connector



UTV366

Lumens: 3200LM
 Voltage: 9 - 32V
 Power: 8x5W CREE LED
 Waterproof and Dustproof: IP68
 EMC CISPR 25 Class 4
 Durable polycarbonate lens
 Stainless steel hardware
 Over/Under voltage protection
 Dimensions: 152x72x61mm



UTV3012

Power: 45W, 4000LM
 Voltage: 9-32V
 Built-in DT Connector
 Swivel mounting bracket
 Waterproof & dustproof: IP68
 Die-cast aluminium housing
 Durable polycarbonate lens



Side and
centre mount



UTV315: 40W, 3600LM

UTV312: 80W, 6400LM

Voltage: 9 - 32V
 Waterproof and Dustproof: IP68
 Swivel Mount
 Over/Under voltage protection
 EMC CISPR25 Class 4
 Durable polycarbonate lens
 Dimensions: 151x92x79mm



To suit top
front cab

UTV341

UTV341 - 80W

8x5W CREE, 3200LM
 8x10W CREE, 6400LM
 Voltage: 9-32V
 Waterproof and dustproof: IP68
 EMC: CISPR 25 Class 4
 Over/Under voltage protection
 Dimensions: 184x102x65mm



UTV3021

60W, 4,800LM

UTV3022

90W, 7,200LM

UTV3023

120W, 9,600LM

UTV3021: 60W, 4800LM

UTV3022: 90W, 7200LM

UTV3023: 120W, 9600LM

Voltage: 9-32V DC

Waterproof and dustproof: IP68

Die-cast aluminum housing

Durable polycarbonate lens

Over voltage protection

ECE-R10 approved

EMC CISPR 25 Class 4



Side and
centre
mount

UTV305: 40W, 3600LM
UTV306: 80W, 6400LM
Voltage: 9 - 32V DC
Swivel mount
Waterproof and Dustproof: IP68
EMC: CISPR 25 Class 4
Durable polycarbonate lens
Stainless steel hardware
Dimensions: 142x60x126mm



UTV364

LED headlight has high and low beam with daytime running light (DRL) inbuilt
60W, 4800 lumen per light on full beam
30W, 2400 lumen on low beam
Bottom mounted
Plug-and-play
Zero radio interference
Maintains OEM appearance

UTV300

Low beam: 30W
High beam: 30W
Halo DRL: 12W
Voltage: 9 - 36V
Waterproof and Dustproof: IP68
EMC CISPR25 Class 4
Durable polycarbonate lens
Over/Under voltage protection
Dimensions: 90x90x141mm



UK, IE and NZ Road legal -
LHD version available upon request

UTV370K

Low beam: 30W
High beam: 60W
DRL: 6W
Voltage: 9 - 32V
Waterproof and dustproof: IP68
Stainless steel hardware
Over/Under voltage protection
*Suitable for 56XL series & Steiger -
Call for more information



UK, IE and NZ Road legal - LHD version available upon request

UTV350K Pair

Low beam: 30W 24000LM
High beam: 60W 4800LM
DRL: 12W
Voltage: 9-32V DC
Operation temperature:
-40°C to 85°C
Colour temperature: 6000K
Waterproof and dustproof: IP68
EMC: CISPR 25 Class 4
Durable polycarbonate lens



UTV3044

40W LED corner work light
40W, 3200 actual Lumens
Plug-and-play
Zero radio interference
Maintains OEM appearance
Suitable for Case CS tractors



UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

UTV325 60W Flood

Lumens: 3200LM
Voltage: 9-32V
Waterproof and dustproof: IP68
EMC CISPR 25 Class 4
Over/Under voltage protection
Dimensions: 85x85x50mm



UTV3006

Case IH LED Headlight **5
& 4200 Series - Pair
Low beam: 30W
High beam: 60W
DRL: 6W
Voltage: 9 - 32V
IP68
Stainless steel hardware



UTV3007

Case IH LED Headlight MX
Series - Pair

Low beam: 30W
High beam: 60W
Voltage: 9 - 32V
IP68



UTV3008

Case IH Headlight JXU
& CVX Series - Pair

Low beam: 30W
High beam: 60W
Voltage: 9 - 32V
IP68
Stainless steel hardware
Over/under voltage protection



UTV3020

Case Puma LWB Headlight Kit - Pair
Low beam: 30W, 2250 actual lumens
High beam: 50W, 3750 actual lumens
EMC: CLSPR25 CLASS 4
Waterproof & Dustproof: IP69K

*This is an insert for the
original lights




UTV3026

Case Magnum/Quadtrac Headlight Kit - Pair
Low beam: 2100 actual lumens
High beam: 2400 actual lumens
Halo DRL: 12W
Voltage: 9 - 32V DC
Waterproof and Dustproof: IP68
EMC CISPR25 Class 3
Durable polycarbonate lens
Overvoltage protect
Operation Temperature: -40° to +85°C



UTV325 60W Flood UTV324 60W Spot/High beam

Lumens: 4800LM
Voltage: 9-32V
Waterproof and dustproof: IP68
EMC CISPR 25 Class 4
Over/Under voltage protection
Dimensions: 104x85x104mm

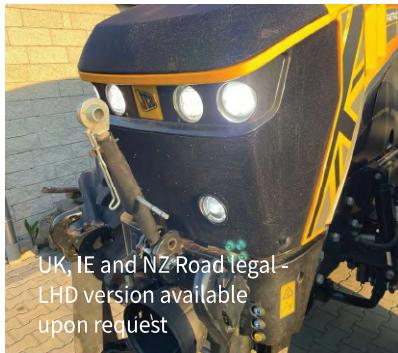

This kit does not include
row finder lights

UTV300-6K
High and low beam
Low beam: 30W 2100LM
High beam: 30W 2400LM
DRL: 12W
Voltage: 9-32V DC
Waterproof and dustproof: IP68
EMC: CISPR 25 Class 4
Durable polycarbonate lens
Over/Under voltage protection
Dimensions: 90x90x141mm

UTV3012

Power: 45W, 4000LM
Voltage: 9-32V
Built-in DT Connector
Swivel mounting bracket
Waterproof & dustproof: IP68
Die-cast aluminium housing
Durable polycarbonate lens



Side and centre
mount

UTV3021

60W, 4,800LM

UTV3022

90W, 7,200LM

UTV3023

120W, 9,600LM



Voltage: 9-32V DC
Waterproof and dustproof
Die-cast aluminum housing
Durable polycarbonate lens
Over voltage protection
ECE-R10 approved
EMC CISPR 25 Class 4

UTV315: 40W, 3600LM

UTV312: 80W, 6400LM

Voltage: 9 - 32V
Waterproof and Dustproof: IP68
Swivel Mount
Over/Under voltage protection
EMC CISPR25 Class 4
Durable polycarbonate lens
Dimensions: 151x92x79mm



Side and centre
mount

UTV314

Power: 5x10W (50W) Osram LED
Lumens: 4000LM
Voltage: 9 - 36V
360° swivel mounting
Built in Deutsch connector
Waterproof and dustproof: IP68
EMC CISPR25 Class 4
Durable polycarbonate lens
Stainless steel hardware
Over/Under voltage protection
Dimensions: 86x62x110mm



UTV305: 40W, 3600LM

UTV306: 80W, 6400LM

Voltage: 9 - 32V DC

Swivel mount

Waterproof and Dustproof: IP68

EMC: CISPR 25 Class 4

Durable polycarbonate lens

Stainless steel hardware

Over/Under voltage protection

Dimensions: 142x60x126mm



UTV501

6 functions:
brake light, dynamic indicator,
tail light, reverse light, rear fog
light and reflector
Dimensions: 350x131x35mm
Voltage: 10-30V
Stainless steel hardware
Waterproof: IP67
Durable polycarbonate lens

UTV332

Low beam: 30W
High beam: 70W
DRL: 12W
Voltage: 9-32V
Waterproof and dustproof: IP68
EMC CISPR 25 Class 4
Durable polycarbonate lens
Stainless steel hardware
Over/Under voltage protection
Dimensions: 228x173x106mm



UK, IE and NZ Road legal -
LHD version available upon
request

UTV330

Low beam: 30W, 2100LM
High beam: 60W, 4200LM
DRL: 12W
Voltage: 9-32V
Waterproof and dustproof: IP68
Durable polycarbonate lens
Colour temperature: 6000K

UK, IE and NZ Road legal -
LHD version available upon
request



UTV3005

Flush-fit
Voltage: 9 - 32V
Waterproof and Dustproof: IP68
Swivel Mount
Over/Under voltage protection
EMC CISPR25 Class 4
Durable polycarbonate lens
Dimensions: 151x92x79mm



UTV Products state actual lumen values whereas other manufacturers state raw
lumen values which can never be achieved.

CLAAS



UTV325 60W Flood UTV324 60W Spot/ High beam

Lumens: 4800LM
Voltage: 9-32V
Waterproof and dustproof: IP68
Durable polycarbonate lens
Stainless steel hardware
EMC: CISPR 25 Class 4
Over/Under voltage protection
Dimensions: 184x102x65mm

UTV305: 40W, 3600LM

UTV306: 80W, 6400LM

Voltage: 9 - 32V DC

Swivel mount

Waterproof and Dustproof: IP68

EMC: CISPR 25 Class 4

Durable polycarbonate lens

Stainless steel hardware

Over/Under voltage protection

Dimensions: 142x60x126mm



UTV337-4K

Low beam: 30W, 2,250lm
High beam: 50W, 3,750lm
DRL: 6W
Voltage: 9 - 32V DC
Dimensions:
132mm (lens diameter)
140mm (light diameter)



UTV367
40W, 4x10W



UTV368
60W, 4x15W



UTV369
90W, 6x15W

Power: 3200LM/4800LM/7200LM
Voltage: 9 - 32V DC
Colour temperature: 6000K
Waterproof and dustproof: IP68
EMC CISPR25 Class 4
Swivel mounting bracket
Durable polycarbonate lens
Stainless steel hardware
Die-cast aluminum housing
E-mark: ECE-R10

UTV300-1K
High beam and low beam kit
Low beam: 30W 2100LM
High beam: 30W 2400LM
DRL: 12W
Voltage: 9-32V DC
Waterproof and dustproof: IP68
EMC: CISPR 25 Class 4
Durable polycarbonate lens
Over/Under voltage protection
Dimensions: 90x90x141mm

UK, IE and NZ Road legal -
LHD version available upon
request



UTV330

Low beam: 30W, 2100LM
High beam: 60W, 4200LM
DRL: 12W
Voltage: 9-32V
Waterproof and dustproof: IP68
Durable polycarbonate lens
Colour temperature: 6000K

UK, IE and NZ Road legal -
LHD version available upon
request

UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

Headlight
Low beam: 30W, 2100LM
High beam: 60W 4200LM
DRL:12W, 800LM
Voltage: 9 - 32V
Waterproof and dustproof: IP68
EMC CISPR 25 Class 4
Durable polycarbonate lens
Over/Under voltage protection
Stainless steel hardware
*Check tab arrangement



UTV362



UTV363



UTV311

Lumens: 3200LM
Power: 4x10W (40W)
Voltage: 9 - 32V
Waterproof and dustproof: IP68
EMC CISPR 25 Class 4
Durable polycarbonate lens
Stainless steel hardware
Over/Under voltage protection



*H9 Connector



UTV314

Power: 5x10W (50W) Osram LED
Lumens: 4000LM
Voltage: 9 - 36V
360° swivel mounting
Waterproof and dustproof: IP68
EMC CISPR25 Class 4
Durable polycarbonate lens
Over/Under voltage protection
Dimensions: 86x62x110mm

UTV3021

60W, 4,800LM

UTV3022

90W, 7,200LM

UTV3023

120W, 9,600LM



Voltage: 9-32V DC

Waterproof and dustproof

Die-cast aluminum housing

Durable polycarbonate lens

Over voltage protection

ECE-R10 approved

EMC CISPR 25 Class 4

UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

DEUTZ-FAHR, LAMBORGHINI AND SAME



UTV321

Power: 4x10W CREE LED
Lumens: 3600LM
Voltage: 9-32V
Waterproof and dustproof: IP68
Over/Under voltage protection
Die-cast aluminum housing
Durable polycarbonate lens
60° flood beam



UTV337-5K

Low beam: 30W, 2,250lm
High beam: 50W, 3,750lm
DRL: 6W
Voltage: 9 - 32V DC
Dimensions:
132mm (lens diameter)
140mm (light diameter)



UK, IE and NZ Road legal -
LHD version available upon request

UTV315: 40W, 3600LM

UTV312: 80W, 6400LM

Voltage: 9 - 32V
Waterproof and Dustproof: IP68
Swivel Mount
Over/Under voltage protection
EMC CISPR25 Class 4
Durable polycarbonate lens
Dimensions: 151x92x79mm
Side and centre mount



UTV311

Lumens: 3200LM
Power: 4x10W (40W)
Voltage: 9 - 32V
Waterproof and dustproof: IP68
EMC CISPR 25 Class 4
Durable polycarbonate lens
Stainless steel hardware
Over/Under voltage protection



*H9 Connector

UTV301

Power: 6x10W Osram LED
Lumens: 4800LM
Voltage: 9-32V
Waterproof and dustproof: IP68
EMC: CISPR 25 Class 4
Durable polycarbonate lens
Stainless steel hardware
Over/Under voltage protection
Dimensions: 100x117x77mm



UTV378

Low beam: 30W, 2100LM/High beam: 60W 4200LM
DRL:12W, 800LM
Voltage: 9 - 32V
Waterproof and dustproof: IP68
EMC CISPR 25 Class 4
Durable polycarbonate lens
Over/Under voltage protection

UTV367
40W, 4x10W



UTV368
60W, 4x15W



UTV369
90W, 6x15W



Power: 3200LM/4800LM/7200LM
Voltage: 9 - 32V DC
Colour temperature: 6000K
Waterproof and dustproof: IP68
EMC CISPR25 Class 4
Swivel mounting bracket
Durable polycarbonate lens
Stainless steel hardware
Die-cast aluminum housing
E-mark: ECE-R10



UTV3012

Power: 45W, 4000LM
Voltage: 9-32V
Built-in DT Connector
Swivel mounting bracket
Waterproof & dustproof: IP68
Die-cast aluminium housing
Durable polycarbonate lens

UTV388K

UK and IE Road legal (RHD) – LHD Versions Available on request
Meets the following approvals ECE-R149 (ECE-R112), ECE-R148 (ECE-R7) and ECE-R10
30W low beam & 60W high beam
6W Daytime Running Light
14000 actual Lumen as a pair
*Suitable for Lamborghini, Same and Hurlimann machines



UTV364

LED headlight has high and low beam with daytime running light (DRL) inbuilt
60W, 4800 lumen per light on full beam
30W, 2400 lumen on low beam
Bottom mounted
Plug-and-play
Zero radio interference
Maintains OEM appearance

UTV385K

UK and IE Road legal (RHD) – LHD Versions Available on request
Meets the following approvals ECE-R149 (ECE-R112), ECE-R148 (ECE-R7) and ECE-R10
30W low beam & 60W high beam
6W Daytime Running Light
14000 actual Lumen as a pair
*Suitable for Lamborghini Formula



UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

UNIVERSAL HEADLIGHTS




UTV330

Low beam: 30W, 2100LM
 High beam: 60W, 4200LM
 DRL: 12W
 Voltage: 9-32V
 Waterproof and dustproof: IP68
 Durable polycarbonate lens
 Colour temperature: 6000K
 Die-cast aluminum housing
 Stainless steel hardware
 Over voltage protection
 4-pin DT connector
 Operation temperature: -40°C to +60°C

Machine-specific kits:

- UTV330-1K for Massey Ferguson 6600/7600/7700/6700S/7700S/6S/7S
- UTV330-2K for Massey Ferguson 5600/5700/5700SL
- UTV330-3K for Massey Ferguson 5S
- UTV330-4K for Massey Ferguson 8S

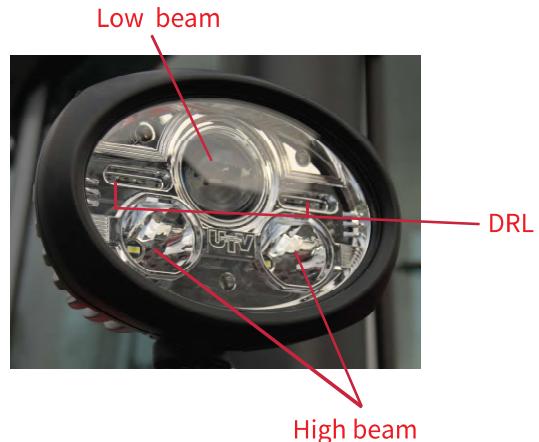

UK, IE and NZ
Road legal - LHD
version available
upon request



EMC CISPR 25 Class 4
 Die-cast aluminum housing
 Durable polycarbonate
 Over voltage protection

UK, IE and NZ Road legal -
LHD version available
upon request

UTV364

Low beam: 30W, 2100LM
 High beam: 60W, 4800LM
 DRL: 12W
 Voltage: 9-32V DC
 Colour temperature: 6000K
 Waterproof and dustproof: IP68



UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

UTV332

Features

Light functions as low beam, high beam, turn signal and DRL
Multiple mounting applications
Designed for on-road and off-road vehicles

Specification

Low beam: 30W
High beam: 70W
DRL: 12W
Voltage: 9-32V
Waterproof and dustproof: IP68
EMC CISPR 25 Class 4
Durable polycarbonate lens
Stainless steel hardware
Over/Under voltage protection
Dimensions: 228x173x106mm

UK, IE and NZ Road legal -
LHD version available
upon request



Durable polycarbonate lens
Over/ Under voltage protection
Stainless steel hardware

UK, IE and NZ Road legal - LHD version available
upon request

UTV331

Low beam:30W
High beam: 60W
DRL: 24W
Voltage: 9-32V
Heated lens
Waterproof and dustproof: IP68
EMC CISPR25 Class 4



UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

UNIVERSAL LIGHTS



Voltage: 9 - 32V
 Waterproof and dustproof: IP68
 EMC CISPR25 Class 4
 Durable polycarbonate lens
 Stainless steel hardware
 Over/Under voltage protection
 Dimensions UTV302: 57x58x87mm
 Dimensions UTV304: 155x53x58mm



UTV302
10W, 1x10W CREE LED
800LM



UTV304
16W, 16x1W Osram LED
1440LM

UTV314
50W, 4000LM



UTV317
40W, 3200LM



Voltage: 9 - 36V
 360° swivel mounting
 Built in Deutsch connector
 Waterproof and dustproof: IP68
 EMC CISPR25 Class 4
 Durable polycarbonate lens
 Stainless steel hardware
 Over/Under voltage protection
 Dimensions UTV317: 78mm square
 Dimensions UTV314: 88mm square

60° outward tilt angle
 Voltage: 9 - 32V
 Shock resistant to 20g
 CE marked
 Operating temperature: - 40°C to 85°C
 Waterproof and dustproof: IP68
 Durable polycarbonate lens
 Over/Under voltage protection
 Dimensions UTV420: 231x55x48mm
 Dimensions UTV421: 312x55x48mm
 Dimensions UTV422: 392x55x48mm

UTV420, UTV421 and UTV422 are also available in white. Product codes are as follows:

UTV420W
 UTV421W
 UTV422W



UTV420
1600LM, 20W Osram



UTV421
2500LM, 32W Osram



UTV422
3680LM, 46W Osram



UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.



UTV260K

Lights included: 2xUTV317
Power: 8x10W Osram LED
Lumens: 6400LM
Twin outlet Deutsch DT connector included



UTV3032

Compact Square LED Work light
Power: 40W
Lumens: 3200 actual lumens
Deutsch DT connector & male plug with cable included



UTV3033

Compact Square LED Work light
Power: 50W
Lumens: 4000 actual lumens
Deutsch DT connector in housing
Includes male DT plug with short length cable



UTV310

Lumens: 3200LM
Power: 4x10W (40W)
Voltage: 9 - 32V
Waterproof and Dustproof: IP68
EMC CISPR 25 Class 4
Durable polycarbonate lens
Over/Under voltage protection

UTV251

Power: 4pcsx6W LMP LEDs
Lumens: 1850LM
80° flood beam
IP rating: IP68 and IP69K
Lexan polycarbonate lens
Stainless steel bracket
Dimensions: 155x 74.8 (including bracket)x48mm

Brake Strobe



COLOURED LIGHTS



UTV902

1200mm (48") amber/white warning strip

UTV903

915mm (36") amber/white warning strip

UTV904

610mm (24") amber/white warning strip

UTV905

460mm (2x18") amber/white warning strip



UTV906

1200mm (48") tail light repeater

UTV907

915mm (36") tail light repeater

UTV908

915mm (2x18") tail light repeater

UTV340

Power: 4x10W CREE Blue LED

Lumens: 2000LM

Voltage: 9-32V DC

Waterproof and dustproof: IP68

EMC: CISPR 25 Class 4

Durable polycarbonate lens

Over/Under voltage protection

Dimensions: 106x79x131mm



*Not suitable for use with pendamethaline or similar pre-emergence sprays



UTV3018

Power: 45W, Pattern: Spot beam, Colour temperature: Blue,

Voltage: 9-32V DC, Swivel mounting bracket, Waterproof and dustproof: IP68, Housing: Die-cast aluminum, Lens: Durable polycarbonate

UTV680 (LED Marker Light Whip Pole 2ft)

UTV681 (LED Marker Light Whip Pole 3ft)

UTV682 (LED Marker Light Whip Pole 4ft)

Includes:

2x Marker Lights (sold in pairs)

1x Remote

Functions:

Multi Pattern

Indicator Function Built in

Brake Light Function Built in

Reverse Light Function Built in

12V Only

UTV843

M10 Spring Mount for Whip Poles
Sold individually



UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

DRIVING LIGHTS

Amber/white
DRL

UTV282

Driving light with warning and park light
Power: 7pcsx10W and 10pcsx6W LEDs
Lumens: 10600LM
Voltage: 9 - 36V DC
IP rating: IP68 and IP69K
EMC CISPR25 Class 4
Durable polycarbonate lens
Over/Under voltage protection
Dimensions: 216Øx225x74.4mm

Low beam: 24W, 1530LM
High beam: 38W, 3315LM
9-36V DC
IP rating: IP68 and IP69K
Efficient polycarbonate lens
H4 connector
Colour temperature: 6500K
Dimensions: 176 x 115.2mm



UK, IE and NZ Road legal -
LHD version available
upon request



UTV290
Black Chrome

UTV291
Chrome

Driving beam: 8500LM
Amber DRL
Stainless Steel Mounting Bracket
Driving Beam+Park Light
Side-Reflecting Optic System
ECE R112 & R7 & R10 Certified
Over / Under Voltage Protection
Reverse Polarity Protection
IP rating: IP68 and IP69K

Dual Technology Hybrid Driving Light and White/Amber DRL
Power: 60W, 4800 Lumens
9-36VDC
Anti-rust/corrosion/freezing resistance
Electronic thermal management (ETM)
Over/under voltage protection
UV resistant, shock resistant-15G
Dimensions: 180mmØ x 190mm height x 67.5mm depth

UTV280
Black Chrome



UTV281
Chrome



LIGHTBARS



UTV246

96W 8075LM 20" (508mm) Slimline Lightbar with Vertical DRL



UTV244

150W 12000LM 20" (508mm) Straight Hybrid DRL Lightbar

UTV248

60W 10" (254mm) Lightbar with Side Reflector Technology



UTV218

270W 30" (765mm) 20600 Lumen Twin Row LED Lightbar



UTV247

150W 12000LM 20" (514mm) Lightbar With Strobe Function and White DRL

UTV249

240W 18600LM 31" (802mm) Lightbar With Strobe Function and White DRL



UTV210

196W 14800 LM 40" (1003mm) Curved Lightbar



UTV211

252W 18800LM 50" (1274mm) Curved Lightbar

UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

TAIL LIGHTS



UTV501

6 functions: brake light, dynamic indicator, tail light, reverse light, rear fog light and reflector pair
10-30V DC
Bolt mounting - stainless steel bolts
IP67
Dimensions: 350x131x35mm

UTV502

6 functions: brake light, dynamic indicator, tail light, reverse light, rear fog light and reflector pair
10-30V DC
Bolt mounting - stainless steel bolts
IP67
4 x external super seal outputs for additional lights
Dimensions: 350x131x35mm



UTV510

3 functions: brake light, indicator and tail light
Stainless steel mounting
10-30V DC
Diameter: 140mm



UTV511

4 functions: brake light, dynamic indicator, tail light and reverse light
10-30V
Stainless steel mounting
Diameter: 140mm




UTV512

4 functions: brake light, dynamic indicator, tail light and number plate light
10-30V
Stainless steel mounting
Dimensions: 103x103mm



UTV530

Wireless tail light - 3 functions: brake light, indicator and tail light - 10-30V DC - Stainless steel mounting - Dimensions: 103x103mm

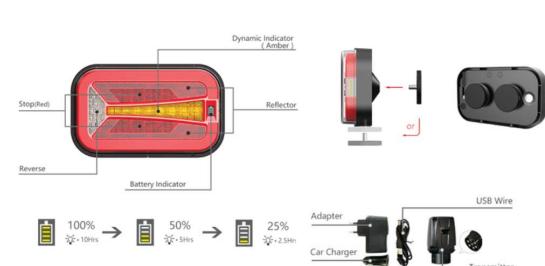

UTV531

Wireless tail light - 5 functions: tail light, stop light, dynamic indicator, reverse and number plate light - 10-30V DC - Stainless steel mounting - Dimensions: 165x100mm

UTV503-12

Functions: Indicator, tail light, brake light, fog light
DC12V, CAN bus error free
Packed as a pair



UTV503-24

Functions: Indicator, tail light, brake light, fog light
DC24V, CAN bus error free
Packed as a pair



UTV505

Functions: Tail light, stop light,
reverse light and fog light
DC10-30V

UTV504-12

Functions: Dynamic indicator, tail light,
brake light, reverse light and fog light
CAN bus error free, 12V only



UTV506

Functions: brake light, tail light and dynamic indicator
DC10-30W

UTV507

Functions: Tail light,
stop light, reverse
light, dynamic
indicator and fog light
DC10-30V



UTV508

Functions: Tail
light, stop light
and dynamic
indicator
DC10-30W



UTV509

Functions: Tail light, brake light, dynamic indicator and reflex reflector
250mm cable

UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

SAFETY WARNING LIGHTS



UTV410

Rectangular Straight Line (BLUE) Safety Perimeter Light



UTV411

Rectangular Straight Line (RED) Safety Perimeter Light



UTV412

Oval-shaped Light Straight Line (BLUE) Safety Perimeter Light



UTV413

Oval-shaped Light Straight Line (RED) Safety Perimeter Light



UTV414

Round Light Curved Line (GREEN) Safety Perimeter LED Light



UTV415

Round Light Curved Line (BLUE) Safety Perimeter LED Light



UTV416

Round Light Curved Line (RED) Safety Perimeter LED Light

UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

MARKER LIGHTS

UTV602

Button Marker – Black Bezel – Amber
 High performance LED lenses and chips
 IP67 RATED
 Voltage: 10-30V, DC
 Operating temp: -40° to 65°C
 Zero radio interference
 Dimensions: 30.3 x 22.3mm



UTV640

Red / Clear Marker Light
 High performance LED lenses and chips
 IP67 RATED
 Voltage: 10-30V, DC
 Operating temp: -40° to 65°C
 Zero radio interference



UTV641

Red / Clear / Dynamic Indicator
 Marker Light
 High performance LED lenses
 and chips
 IP67 RATED
 Voltage: 10-30V, DC
 Operating temp: -40° to 65°C
 Zero radio interference
 Dimensions:



UTV646RY

Halo Red Strobe with Amber Marker Light
 IP67 RATED
 Voltage: 10-30V, DC
 Operating temp: -40° to +60°C
 Zero radio interference

MARKER LIGHTS



UTV646WY

Halo White Strobe with Amber Marker Light

IP67 RATED

Voltage: 10-30V, DC

Operating temp: -40° to +60°C

Zero radio interference

UTV650 (White)

UTV651 (Amber)

UTV652 (Red)

High performance LED lenses and chips



IP67 RATED

Voltage: 10-30V, DC

Operating temp: -40° to 65° C

Zero radio interference

Dimensions: 124 x 49 x 22mm



UTV653 (White)

UTV654 (Amber)

UTV655 (Red)

High performance LED lenses and chips

IP67 RATED

Voltage: 10-30V, DC

Operating temp: -40° to 65° C

Zero radio interference

Dimensions: 124 x 49 x 22mm

BEACONS



UTV610

32W Pole Mounted Beacon – Amber
Shallow Black Top
High Performance
IP67 RATED
10 Flash Patterns



UTV614

48W Flexible DIN Pole Mounted Beacon
High Performance
3W LED lenses and chips
IP66 RATED
3 Flash Patterns



UTV632

48W Magnetic Mount Flashing Beacon
High Performance
IP66 RATED
3 Flashes Per Minute
DIN Plug On Coiled Cable



UTV613

Pole Mounted Beacon
CANBUS Free
3 Flash patterns

Designed to Operate with the CAN BUS on but not limited to the following machines:

- John Deere R-Series and 30 series
- Fendt – S4, S5, Gen6 & Gen7
- Gen6 and Gen7 Fendt



UTV620

36W Rechargeable Magnetic Flashing Beacon
High Performance
IP66 RATED
120 Flashes per Minute
USB Rechargeable
4 Hour Charge Time
8 Hour battery Life



UTV634

Single Bolt Mounted Beacon - Green
Homologation EC R10
DC 12-24V
IP66 Rated



UTV633

DIN Pole Mounted Beacon - Green
Homologation EC R10
DC 12-24V
IP66 Rated

UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

STROBES



UTV606 - 3 LED

UTV607 - 4 LED

UTV608 - 6 LED

Amber strobe

Peak power: 3W per LED

Voltage: 10-30V DC

Flash patterns: 19 modes

1.5 metre cable



UTV616

Directional amber warning light

18W (6 pcs x 3W)

DC10-30V


300mm cable



4 LED Surface Mount Strobe
1.5mm cable



6 LED Surface Mount Strobe
1.5mm cable



UTV617

Directional amber warning light

36W (12 pcs x 3W)

300mm cable



UTV618

Directional blue warning light

36W (12 pcs x 3W)

300mm cable

Dual LED colours: Amber/White
12W (4pcs x 3W)

UTV670 Dual LED colours: Amber/Red
12W (4pcs x 3W)

UTV672 Dual LED colours: Blue/Red
12W (4pcs x 3W)

UTV674 LED colour: Blue
12W (4pcs x 3W)

UTV676 LED colour: Blue
12W (4pcs x 3W)


UTV671 Dual LED colours: Amber/White
18W (6pcs x 3W)

UTV673 Dual LED colours: Amber/Red
18W (6pcs x 3W)

UTV675 Dual LED colours: Blue/Red
18W (6pcs x 3W)

UTV677 LED colour: Blue
18W (6pcs x 3W)

WIRING LOOMS AND ACCESSORIES

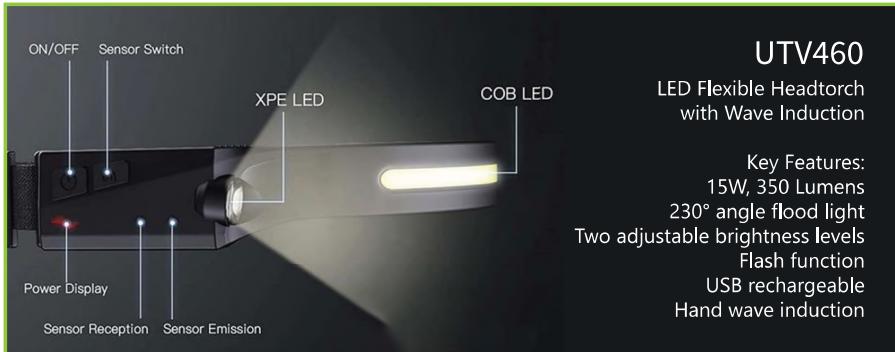

Please visit our website to shop our full range of wiring looms, resistors and connectors.

NEW PRODUCTS



UTV3032

40W, 3200 Lumen Compact
Square LED Work light



UTV3033

50W, 4000 Lumen Compact
Square LED Work light



UTV3006

Case IH LED Headlight
**5 & 4200 Series - Pair



UTV3007

Case IH LED
Headlight MX
Series - Pair



UTV3008

Case IH Headlight JXU
& CVX Series - Pair



UTV3015

T6000 New Holland
Full Head light



UTV3020

Case Puma LWB
Headlight Kit - Pair

*This is an insert for the
original lights





UTV3026
Case Magnum/Quadtrac
Headlight Kit - Pair



UTV3029
130mm Headlight For John Deere M Series




UTV283
Nova X 9" Light Cannon 120W
Black Dual Lens Tech LED Spot
- DRL Amber/White




*SPECIFICATION AVAILABLE AT A LATER DATE

UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

YOUR NOTES

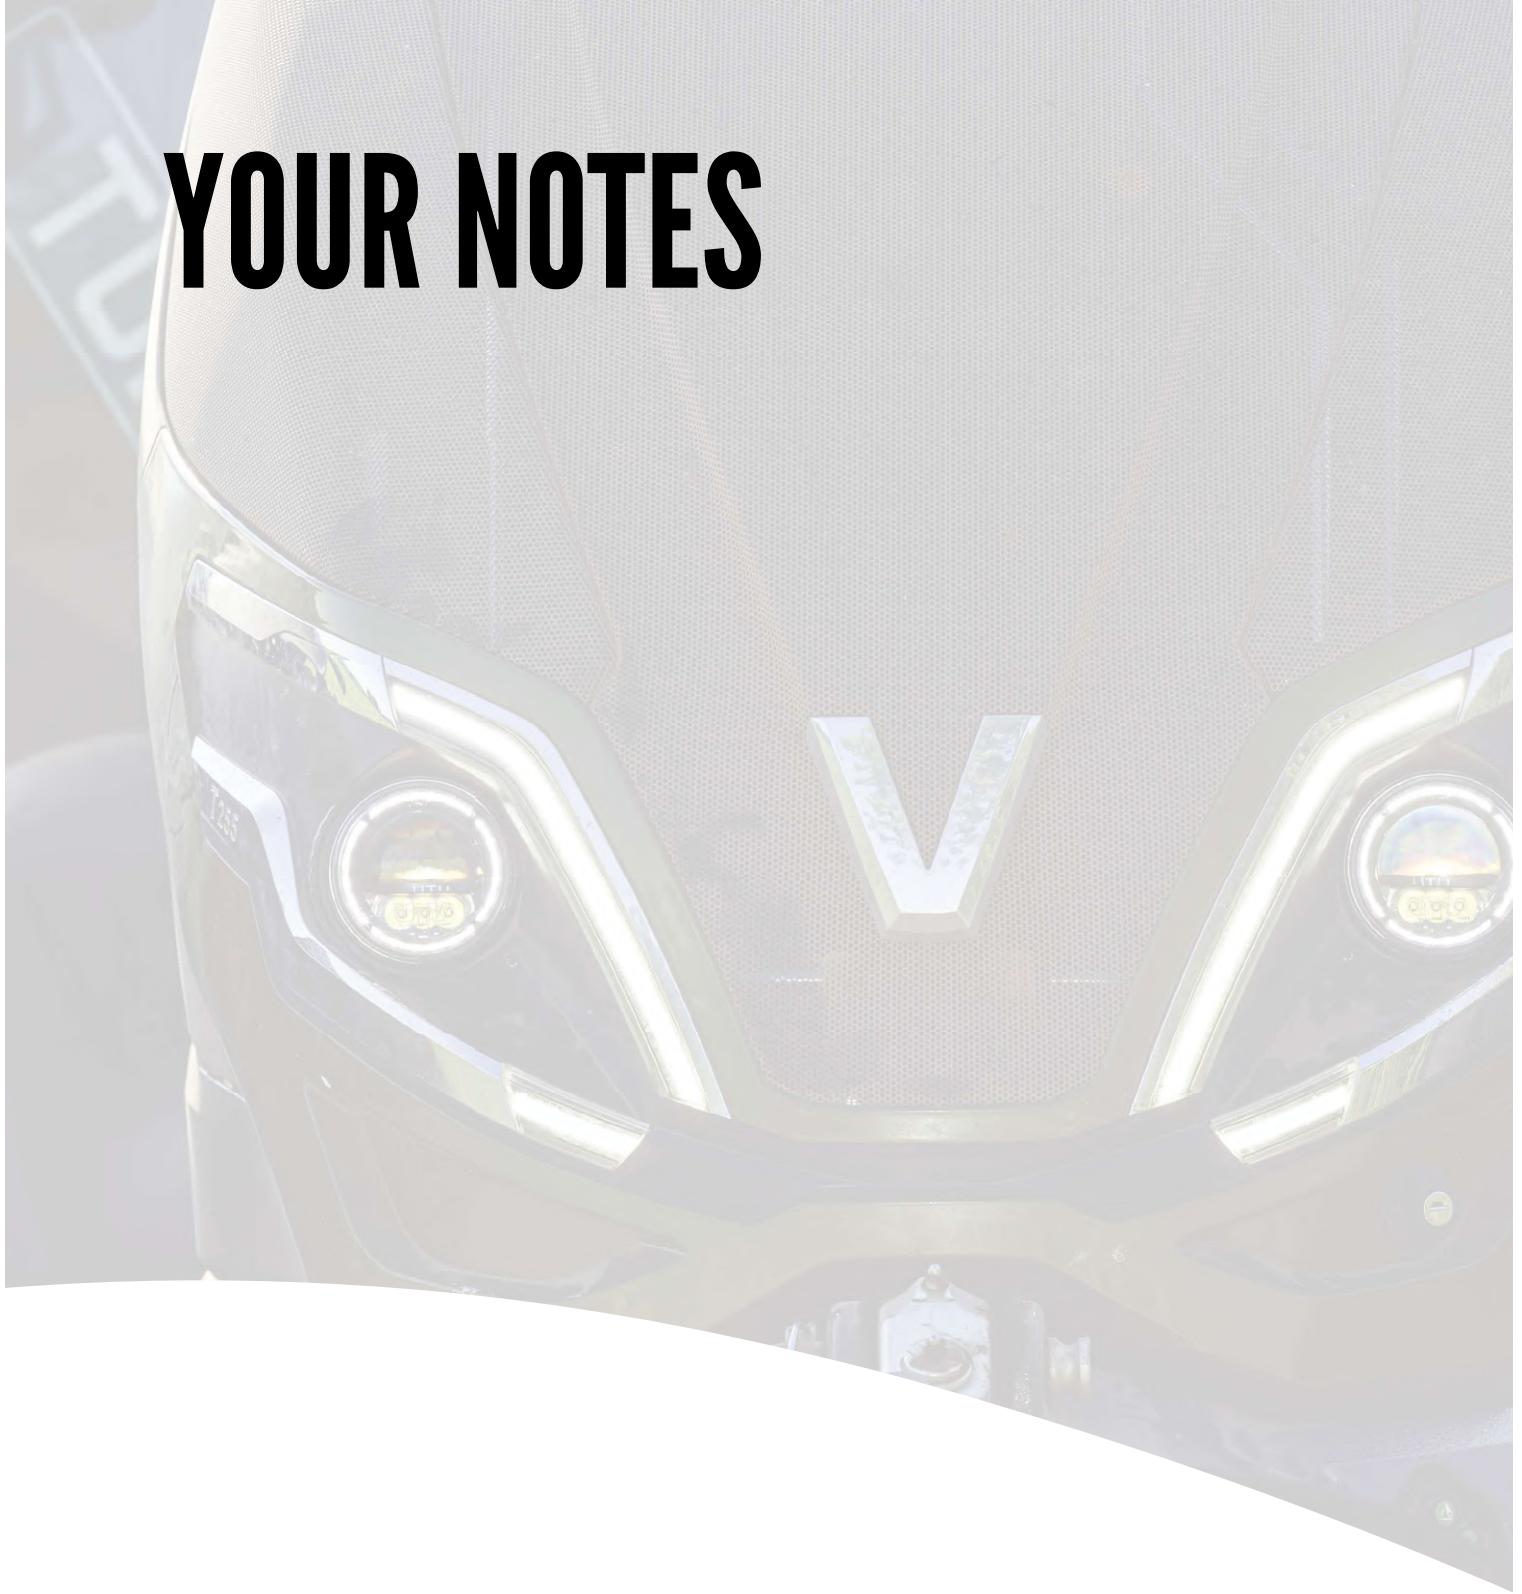

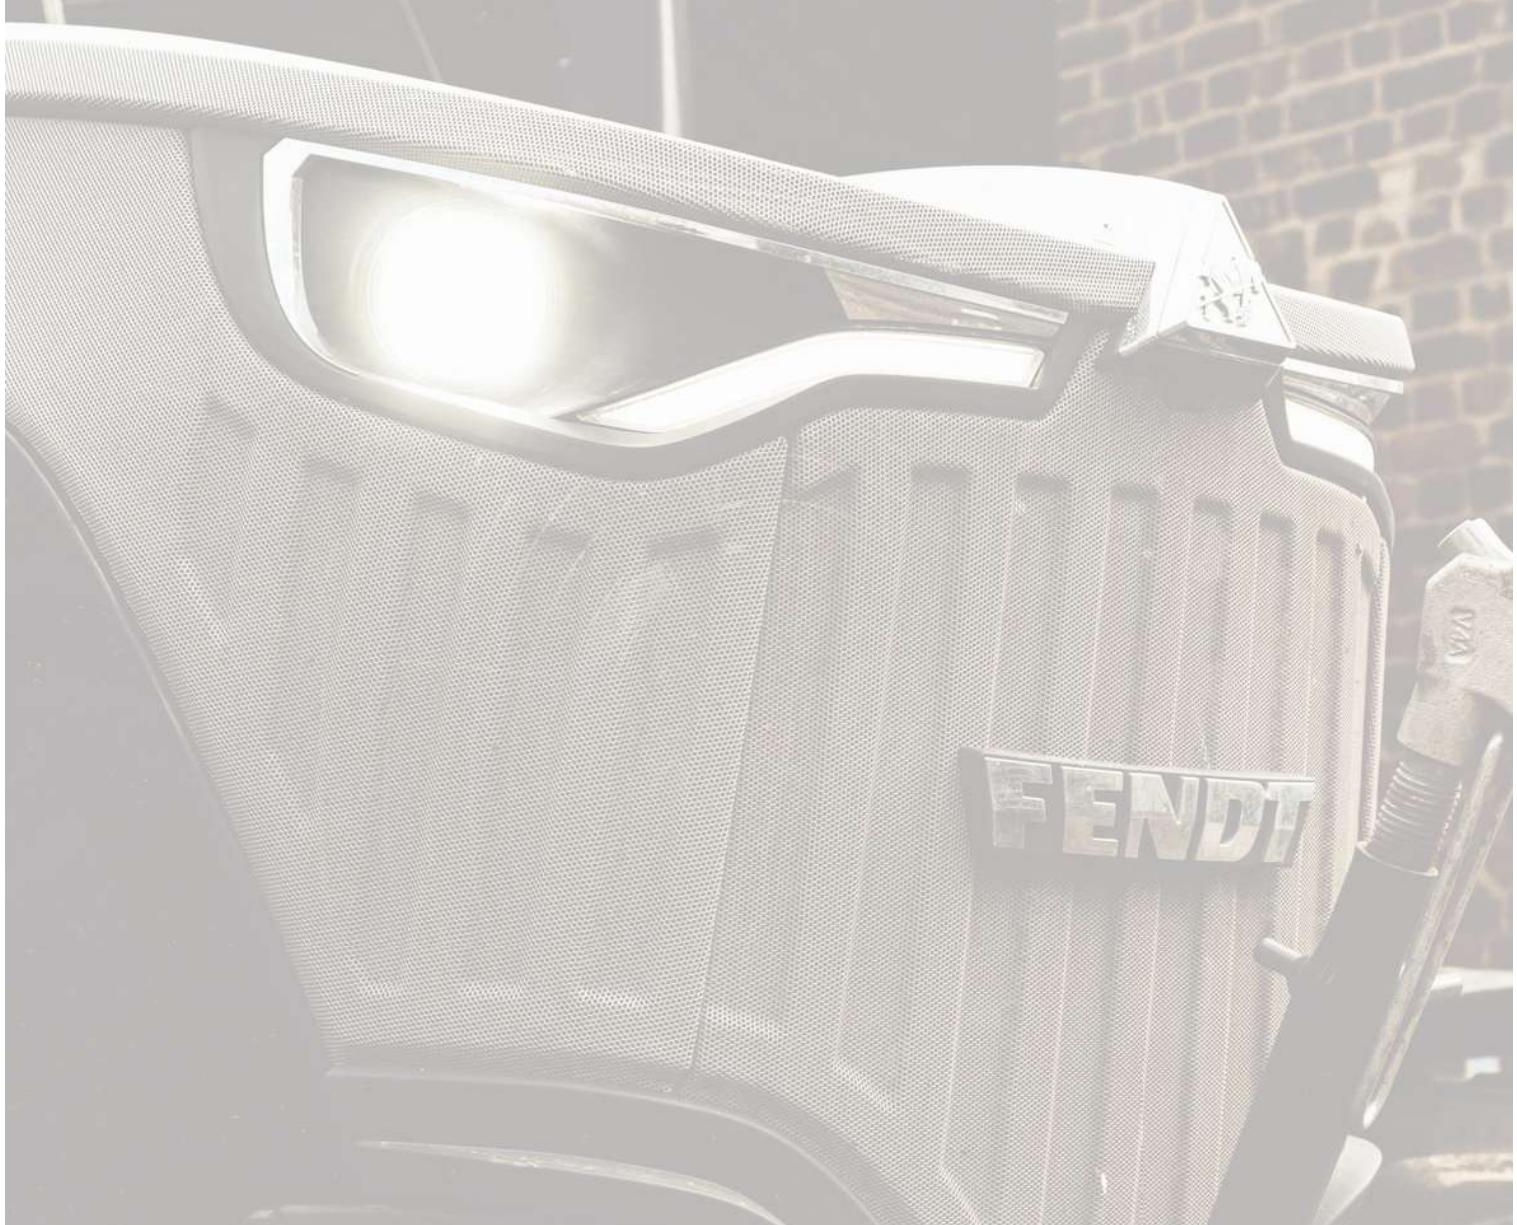

CONTACT US

UNITED KINGDOM

+44 (0) 1270 895344

IRELAND

+353 (0) 15543922

EUROPE

+386 30 238 480



Issue 6

UTV Products Ltd

Wades Green Hall, Nantwich,
Cheshire, CW5 6DX, United Kingdom
sales@utvproducts.co.uk
www.utvproducts.co.uk

UTV Products Ireland Ltd

Unit 1A, Heatherview Business Park
Athlone Road,
Co. Longford, N39 KD82, Ireland
sales@utvproducts.ie
www.utvproducts.ie

