



2026

FARM AND MUNICIPAL MACHINERY

TALEX Sp z o. o.
ul. Dworcowa 9C
77-141 Borzytuchom
Poland

Contact:
tel. +48 59 821 13 40
e-mail: biuro@talex.pl

www.talex-sj.pl/en



www.talex-sj.pl/en



NEW

CENTRAL SUSPENSION DISC MOWERS

Maxi Cut

MAXI CUT 300

MAXI CUT 340

Working width [m]	3,00	3,40
Power demand [HP]	90	100
Mass [kg]	950	1010
Efficiency [ha/h]	3,5	4,0
Number of discs/blades	7/14	8/16
Hitch category	II/III	II/III
PTO shaft [Nm]	460	460
PTO rotational speed [RPM]	540	540



REAR DISC MOWERS

Opti Cut

OPTI CUT 220

OPTI CUT 260

OPTI CUT 300

Working width [m]	2,2	2,6	3,0
Power demand [HP]	60	70	80
Mass [kg]	560	597	655
Efficiency [ha/h]	2,6	3,1	3,75
Number of discs/blades	5/10	6/12	7/14
Hitch category	II/III	II/III	II/III
PTO shaft with one-way clutch [Nm]	460	460	460
PTO rotational speed [RPM]	540	540	540



FRONT DISC MOWER

Fast Cut

FAST CUT 300

Working width [m]	3,0
Power demand [HP]	80
Mass [kg]	940
Efficiency [ha/h]	3,5
Number of discs/blades	7/14
Hitch category	II
PTO shaft	880, L-920 one-way clutch + friction clutch 1200 Nm
PTO speed [RPM]	1000





Eco Cut

	ECO CUT 135*	ECO CUT 165*	ECO CUT 185*
Working width [m]	1,35	1,65	1,85
Power demand [HP]	25	40	60
Mass [kg]	338	369	430
Efficiency [ha/h]	1	1,4	1,6
Number of blades [pcs.]	4	6	6
Hitch category	I/II	I/II	II/III
PTO shaft [Nm]	270	460	460
PTO rotational speed [RPM]	540	540	540

*PTO shaft + hyd. lift included

Eco Cut

	ECO CUT 210
Working width [m]	2,1
Power demand [HP]	70
Mass [kg]	562
Efficiency [ha/h]	2,5
Number of blades [pcs.]	8
Hitch category	II/III
PTO shaft [Nm]	460 with one-way clutch
PTO rotational speed [RPM]	540

Mini

	MINI 135
Working width [m]	1,35
Power demand [HP]	25
Mass [kg]	280
Efficiency [ha/h]	1
Number of blades [pcs.]	4
Hitch category	I/II
PTO shaft [Nm]	270
PTO rotational speed [RPM]	540

Mini Mini

	MINI MINI 135
Working width [m]	1,35
Power demand [HP]	18
Mass [kg]	180
Efficiency [ha/h]	1
Number of blades [pcs.]	8
Hitch category	I
PTO shaft [Nm]	460 with one-way clutch
PTO rotational speed [RPM]	540

Rota Hydro

	ROTA HYDRO 135 WITH HYDRAULIC DRIVE
Working width [m]	1,35
Power demand [HP]	18
Mass [kg]	254
Efficiency [ha/h]	1
Number of blades [pcs.]	8
Brackets	For any loaders
Machine drive	External carrier machine hydraulic system
Oil demand [l/min]	40
Max. hydraulic pressure [bar]	160



ECOLINE



Eco

	ECO 100	ECO 135*	ECO 150*	ECO 180*	ECO 200*	ECO 220*
Working width [m]	1	1,35	1,5	1,8	2,0	2,2
Power demand [HP]	15	25	30	40	50	60
Mass [kg]	222	260/302*	273/315*	373/408*	397/432*	420/455*
Efficiency [ha/h]	0,5	0,7	0,75	1,3	1,6	1,9
Number of flails [pcs.]	16	22	24	26	30	34
Hitch category	I	I	I	I/II	I/II	I/II
PTO shaft [Nm]	460	460	460	620	620	620
PTO rotational speed [RPM]	540	540	540	540	540	540
Hydraulic offset [mm]	-	400	400	400	400	400

*Hydraulic offset as optional equipment

Eco Hydro

ECO HYDRO 150 WITH HYDRAULIC DRIVE

Working width [m]	1,5
Power demand [HP]	21
Mass [kg]	329
Efficiency [ha/h]	0,75
Number of flails [pcs.] / knives [pcs.]	24
BRACKETS	For any wheel loaders
Machine drive	External carrier machine hydraulic system
Oil demand [l/min]	32
Max. hydraulic pressure [bar]	160

HARDLINE



Duo

	DUO 200	DUO 250	DUO 280
Working width [m]	2,0	2,5	2,8
Power demand [HP]	40	50	75
Mass wheel version [kg]	525	575	635
Mass roller version [kg]	485	550	609
Efficiency [ha/h]	1,6	2	2,24
Number of flails [pcs.] / knives [pcs.]	32/64	40/80	46/92
Hitch category	II	II	II
PTO shaft [Nm]	620, L-1010 Shear bolt	830, L-1110 Shear bolt	830, L-1110 Shear bolt
PTO rotational speed [RPM]	540	540	540
Hydraulic offset [mm]	400	400	400

*Automatic belt tensioner

PROFILINE



Tiger

TIGER 300

Working width [m]	2,8
Power demand [HP]	120
Mass [kg]	1160
Efficiency [ha/h]	2,8
Number of flails [pcs.]	40
Hitch category	II
PTO shaft [Nm]	1000
Working shaft diameter [mm]	219
PTO rotational speed [RPM]	1000
Number of counter blades	6 pieces in 2 rows.
Number of V-belts [pcs.]	5
Hydraulic offset [mm]	500



Leo

LEO 320

Working width [m]	3,2
Power demand [HP]	120
Mass [kg]	1400
Efficiency [ha/h]	2,5
Number of flails [pcs.] / knives [pcs.]	46/92
Hitch category	II
PTO shaft [Nm]	620, L=1010, one way clutch + friction clutch 1000 Nm
PTO rotational speed [RPM]	540




Gepard

GEPARD 470

Working width [m]	4,7
Power demand [HP]	150
Mass [kg]	1972
Efficiency [ha/h]	3,5
Number of flails [pcs.] / knives [pcs.]	68/136
Hitch category	II/III
PTO shaft [Nm]	1240, L-1000 one-way clutch + friction clutch 2200Nm
PTO rotational speed [RPM]	540

Swath conditioners +

TALEX

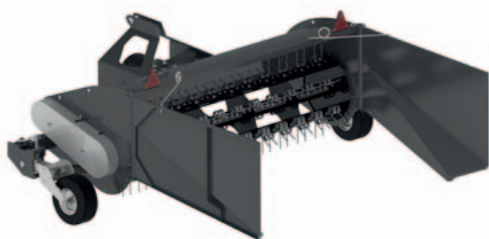

Bocian

BOCIAN 225

Working width [m]	2,25
Power demand [HP]	60
Mass [kg]	590
Efficiency [ha/h]	2,25
Number of tines [pcs.]	70
Hitch category	II
PTO shaft [Nm]	460, L-1300, one-way clutch + friction clutch 900 Nm
PTO rotational speed [RPM]	540



Bocian Profi

BOCIAN 275 PROFI

Working width [m]	2,75
Power demand [HP]	70
Mass [kg]	795
Efficiency [ha/h]	2,75
Number of tines [pcs.]	86
Hitch category	II
PTO shaft [Nm]	460, L-1300, one-way clutch + friction clutch 900 Nm
PTO rotational speed [RPM]	540



Tornado	TORNADO 550	PULLED VERSION	TORNADO 550	3-POINT HITCH VERSION
Working width [m]	5,5		5,5	
Power demand [HP]	35		50	
Mass [kg]	723		800	
Efficiency [ha/h]	5,5		5,5	
Number of rotors [pcs.]	4		4	
Numbers of arms on rotor [pcs.]	6		6	
Rotor diameter [mm]	1820		1820	
Hitch category	Farm hitch		TUZ cat. II	
PTO shaft [Nm]	460, L-1600, ratchet clutch		460, L-1600, ratchet clutch	
PTO rotational speed [RPM]	540		540	

NEW



Tornado 800	TORNADO 800
Working width [m]	8,00
Power demand [HP]	80
Mass [kg]	1468
Efficiency [ha/h]	8,0
Number of rotors [pcs.]	6
Numbers of arms on rotor [pcs.]	6
Rotor diameter [mm]	1820
Hitch category	Drawbar - trailed
PTO shaft [Nm]	460, L-2113, ratchet clutch
PTO rotational speed [RPM]	540

Rakes

TALEX


NEW



Spyder ZK 800	SPYDER ZK 800	DRAWBAR VERSION
Working width [m]	6,8-7,8	
Power demand [HP]	80	
Mass [kg]	2300	
Efficiency [ha/h]	8-9	
Number of rotors [pcs]	2	
Number of arms per rotor [pcs]	11	
Rotor diameter [mm]	3300	
Hitch category	II	
PTO shaft [Nm]	830, L-1050, ratchet clutch, one-sided wide-angle joint	
PTO speed [rpm]	540	



Spyder	SPYDER 360	SPYDER 420
Working width [m]	3,6	4,2
Power demand [HP]	40	50
Mass [kg]	570	630
Efficiency [ha/h]	3,4-3,9	4-4,5
Numbers of arms on rotor [pcs.]	9 (4 fold up for transport)	11 (6 fold up for transport)
Rotor diameter [mm]	2700	3300
Hitch category	I/II	I/II
PTO shaft [Nm]	270, L-860, ratchet clutch	270, L-1310, ratchet clutch
PTO rotational speed [RPM]	540	540

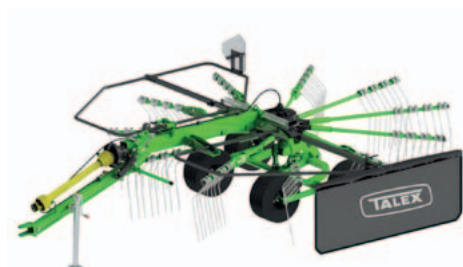

Spyder

SPYDER 420 DRAWBAR VERSION

Working width [m]	4,2
Power demand [HP]	35
Mass [kg]	570
Efficiency [ha/h]	4-4,5
Numbers of arms on rotor [pcs.]	11 (6 foldable for transport)
Rotor diameter [mm]	3300
Hitch category	Drawbar - trailed
PTO shaft [Nm]	460, L-1310, ratchet clutch, one-sided wide-angle joint
PTO rotational speed [RPM]	540

Bale wrapper⁺

TALEX

★ PROFILINE



Sprinter

SPRINTER 1500

Min. power demand (HP)	48
Mass [kg]	1820
Efficiency [bales/h]	45
Machine drive	Hydraulic
Hitch category	Drawbar
Control system	Electronic
Way of bale loading	Side
Min. Oil demand [l/min]	17
Max. hydraulic pressure [bar]	160





City	CITY 120	CITY 150
Working width [m]	1,2	1,5
Mass [kg]	180	200
Drive	hydraulic / mechanical	
Oil demand [l/min]	15	15
Max. Hydraulic pressure [bar]	140	140
Waste bucket volume [l]	90	110
Main brush diameter [mm]	450	450
Brackets as standard	Any Brackets	
Type of main brush included in price	Choice of: MIX, PPN	



Basic Broom	120*	150*	180*	230*
Working width [m]	1,2	1,5	1,8	2,3
Oil demand [l/min]	25	25	25	25
Max. hydraulic pressure [bar]	150	150	150	150
Main brush diameter [mm]	510	510	510	510
Mass with Cat. 1 three point link [kg]	330	365	380	430
Brackets as standard	Any 3pt link or loader brackets			
Type of main brush included in price	choice of: MIX (steel + poly bristles), PPN (poly bristles), Spiral PPN (for snow)			
*brackets for any loaders, forklifts etc available.				



Eco Clean	120*	150*	180*	230*
Working width [m]	1,2	1,5	1,8	2,3
Oil demand [l/min]	25	25	25	25
Max. hydraulic pressure [bar]	150	150	150	150
Waste bucket volume [l]	100	130	160	200
Main brush diameter [mm]	510	510	510	510
Sweeper weight - standard equipment [kg]	230	265	280	330
Brackets as standard	Rear or front 3-point hitch of any category			
Type of main brush included in price	choice of: MIX (steel + poly bristles), PPN (poly bristles), Spiral PPN (for snow)			
*brackets for any loaders, forklifts etc available.				

★ PROFILINE



Profi Clean	PROFI CLEAN 280
Working width [m]	2,8
Drive	Hydraulic
Oil demand [l/min]	80
Max. hydraulic pressure [bar]	160
Waste bucket volume [l]	600
Main brush diameter [mm]	650
Sweeper weight - standard equipment [kg]	445
Brackets as standard	Any (customer choice when ordering)
Type of main brush included in price	Choice of: MIX, PPN



Twister	TWISTER 180	TWISTER 200	TWISTER 240
Working width [m]	1,8	2	2,4
Drive	Hydraulic	Hydraulic	Hydraulic
Oil demand [l/min]	30	30	30
Max. hydraulic pressure [bar]	160	160	160
Waste bucket volume [l]	540	600	720
Main brush diameter [mm]	650	650	650
Brackets as standard	for any wheel loader		
Type of main brush included in price	Choice of: MIX, PPN		

NEW


Garden

GARDEN 130

GARDEN 155

Working width [m]	1,30	1,55
Power demand [HP]	18	25
Mass [kg]	180	200
Efficiency [ha/h]	0,6	0,8
Number of flails [pcs.]	32	40
Hitch category	I	I
PTO shaft [Nm]	460, L-860 shear bolt	460, L-860 shear bolt
PTO rotational speed [RPM]	540	540



Ultra Light

ULTRA LIGHT 130

ULTRA LIGHT 155

Working width [m]	1,3	1,55
Power demand [HP]	20	25
Mass [kg]	251	261
Efficiency [ha/h]	0,65	0,75
Number of flails [pcs.]	32	40
Hitch category	I	I
PTO shaft [Nm]	460, L-1500 shear bolt	460, L-1500 shear bolt
PTO rotational speed [RPM]	540	540
Working range [°]	+ 90 -50	+ 90 -50



Evo

EVO 120

EVO 140

EVO 165

Working width [m]	1,2	1,4	1,65
Power demand [HP]	30	35	40
Mass [kg]	320	340	370
Efficiency [ha/h]	0,6	0,7	0,8
Number of flails [pcs.]	18	22	26
Hitch category	I / II	I / II	I / II
PTO shaft [Nm]	460, L-1500 shear bolt	460, L-1500 shear bolt	460, L-1500 shear bolt
PTO rotational speed [RPM]	540	540	540
Number of V-belts [pcs.]	3	3	4
Working range [°]	+90 -50	+90 -50	+90 -50
Counter-knives	One fixed counter knife + 7 replacable in one row	One fixed counter knife + 8 replacable in one row	One fixed counter knife + 9 replacable in one row

HARDLINE


Leopard RB

RB 160

RB 180

RB 200

Working width [m]	1,6	1,8	2
Power demand [HP]	70	85	100
Mass [kg]	813	880	932
Efficiency [ha/h]	1,2	1,35	1,5
Number of flails [pcs.]	24	28	32
Hitch category	II	II	II
PTO shaft [Nm]	620, L-1010 shear bolt	620, L-1010 shear bolt	620, L-1010 shear bolt
PTO rotational speed [RPM]	540	540	540
Working range [°]	+ 90 -45	+ 90 -45	+ 90 -45



Scan the code
and see our YouTube





**Do you have
any questions?**
Please contact us!

tel.: **+48 59 821 13 40**

fax: **+48 59 821 13 40**

e-mail: **biuro@talex.pl**



Your dealer:

TALEX Sp z o. o.
ul. Dworcowa 9C
77-141 Borzytuchom
Poland

VAT PL8420003742
REGON 770509121

www.talex-sj.pl/en