

# Chain Supply UK Sells Industrial Chain Products to suit any Application.

Chain Supply UK (CSUK) was founded in 2005 to source and supply all chain types & ancillary products for the industrial distribution market.

[chainsupply.co.uk](http://chainsupply.co.uk)



chainSupply<sup>UK</sup>



## Your Trusted Partner for Overcoming Industrial Chain Supply Challenges

In the world of industrial operations, the right chain can make or break your productivity. Chain Supply UK understands the unique challenges faced by buyers in this complex market, and we're here to provide the solutions you need to keep your operations running smoothly.



Mechanical  
& Electrical



Safety  
Solutions



Workplace  
Essentials

QUALITY | VALUE | SERVICE

## We ensure the Highest **QUALITY**, **VALUE** & **SERVICE** for all of our Customers

Your satisfaction is at the heart of everything we do. Our team of professionals is dedicated to understanding your unique needs, offering personalised solutions, and delivering products that meet and exceed your expectations. We take pride in fostering lasting relationships built on trust, reliability, and mutual success.



### Experience

With 25 years in the industry, we bring unparalleled expertise to the table.



### Value for Money

Competitive pricing without compromising on the excellence of our service.



### Product Quality

We meticulously source and supply products of the highest standards to meet your needs.



### Exceptional Service

Our commitment to your satisfaction drives our dedicated customer service.

SPECIALIST INDUSTRIAL CHAIN AND ANCILLARY PRODUCTS

## Core Product Range



**Dedicated Account Managers:** Our experienced account managers provide personalized support throughout the entire process, from consultation to delivery.

### How CSUK solves typical Challenges for it's Customers:



#### Expert Consultation:

Our team of experienced engineers and chain specialists will work closely with you to understand your specific requirements and recommend the optimal chain solutions for your application.



#### Unrivalled Selection:

We offer an extensive inventory of industrial chains, including roller chains, conveyor chains, leaf chains, and more. We partner with leading manufacturers to ensure consistent quality and reliable



#### First Class Service:

Our efficient processes and strong supplier relationships guarantee timely delivery of your orders, no matter how complex application.

# CSUK quality Roller Chain is highly fatigue resistant, giving up to four times the life of other leading competitor chains

Applications of CSUK industrial chains are vast and diverse. The specific types of chains used by our customer base may vary depending on the industry and application, but BS roller chains are a popular choice due to their versatility and reliability.

## Chain Supply UK provide a complete procurement solution:



**Ease of Purchasing**

**One-Stop Shop:** We offer a vast inventory of MRO products, from bearings and power transmission components to lubricants, tools, and safety gear. Find everything you need in one place.

**Expert Guidance:** Our experienced team understands the unique needs of various industries and can help you select the right products for your specific applications.



**Increased Uptime**

**Reliable Supply Chain:** We maintain a robust supply chain with reliable partners, ensuring you have access to the products you need when you need them.

**Technical Support:** Our knowledgeable team is available to provide technical support, troubleshooting assistance, and product recommendations to ensure your operations run smoothly.



**Cost Savings**

**Cost Savings:** By partnering with Howcroft Group, you can consolidate your MRO procurement, reduce administrative overhead, and utilise our product & industry knowledge, skills and experience to best effect.

**Quality Assurance:** We only source products from reputable manufacturers who meet our stringent quality standards, ensuring you get reliable, high-performance MRO products at a competitive cost.



**Reduction in Working Capital**

**Inventory Management:** We offer inventory management services to help you track your stock levels, automate reordering, and optimize your inventory for maximum efficiency.

**Competitive Pricing:** We leverage our strong supplier relationships to negotiate the best possible prices for our customers, ensuring you get maximum value for your investment.

SPECIALIST INDUSTRIAL CHAIN AND ANCILLARY PRODUCTS

# Industry Sectors Served



**BAKERY & DAIRY**



**THEME PARKS**



**BEVERAGE,  
FOOD & PROCESSING**



**FOOD & BEVERAGE  
PRODUCTION**



**MINING**



**SUGAR  
PRODUCTION**



**ASPHALT, WATER &  
RECYCLING**



**TIMBER**



**WATER TREATMENT**



**INFRASTRUCTURE**



**MANUFACTURING**



**AGRICULTURE**



**PRINTING, PAPER &  
PACKAGING**



**CONSTRUCTION**



**LOGISTICS &  
WAREHOUSING**

# In the world of industrial operations, the right chain can make or break your productivity.

Chain Supply UK understands the unique challenges faced by buyers in this complex market, and we're here to provide the solutions you need to keep your operations running smoothly.

## Common Challenges Faced by Industrial Chain Buyers:



With so many types, sizes, and materials available, finding the perfect chain for your specific application can be daunting. Incorrect selection can lead to premature wear, breakdowns, and costly downtime.



Not all chain suppliers are created equal. Quality issues, inconsistent stock, and unreliable delivery times can wreak havoc on your production schedule.



Coordinating orders for multiple chain types and sizes, ensuring timely delivery, and dealing with unexpected issues can be a logistical nightmare.




When problems arise, having access to knowledgeable technical support is essential to quickly diagnose and resolve issues.

# Data Sheet

## ANSI Heavy Series Roller Chain

CSUK Chain has been developed and manufactured to the highest standards. Using years of experience combined with the latest technologies and next generation innovation, we've enhanced fatigue and wear life to meet the toughest of applications. Resulting in less downtime, more productivity and lower Total Cost of Ownership.

- CSUK Chain features:
- Solid Bush design
  - Shot-peened plates
  - Multi-stage plate holing
  - Optimised interference fits
  - Enhanced initial lubrication
  - Dynamic pre-loading

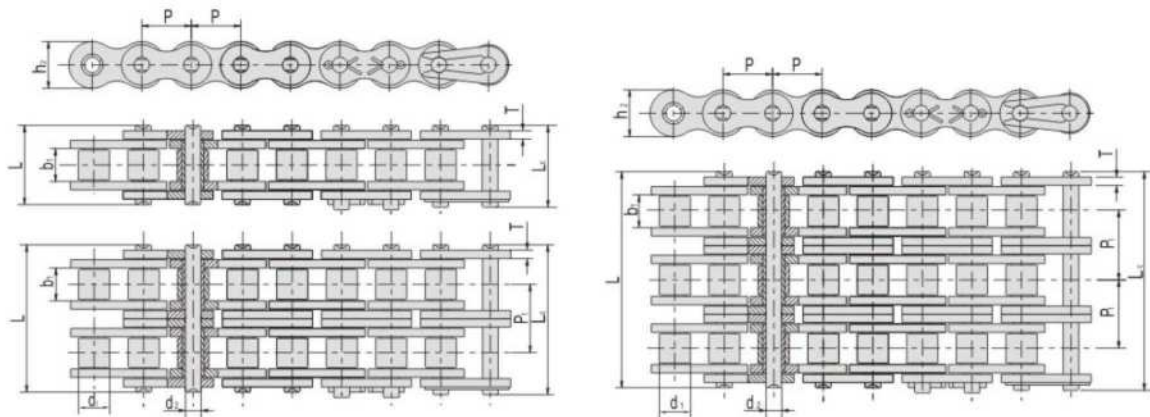


| ISO           | ANSI           | Pitch  | Roller diameter    | Width between inner plates | Pin diameter       | Pin length |                    | Inner plate depth  | Plate thickness | Transverse pitch | Ultimate tensile strength | Average tensile strength | Weight per meter |
|---------------|----------------|--------|--------------------|----------------------------|--------------------|------------|--------------------|--------------------|-----------------|------------------|---------------------------|--------------------------|------------------|
| ISO Chain No. | ANSI Chain No. | P      | d <sub>1</sub> max | b <sub>1</sub> min         | d <sub>2</sub> max | L max      | L <sub>c</sub> max | h <sub>2</sub> max | T max           | Pt               | Q <sub>min</sub>          | Q <sub>0</sub>           | q                |
|               |                | mm     | mm                 | mm                         | mm                 | mm         | mm                 | mm                 | mm              | mm               | KN                        | KN                       | kg/m             |
|               | *35H           | 9.525  | 5.08               | 4.68                       | 3.58               | 13.3       | 14.3               | 9.0                | 1.5             |                  | 7.9                       | 10.8                     | 0.14             |
| 08AH-1        | 40H            | 12.70  | 7.92               | 7.85                       | 3.96               | 18.8       | 19.9               | 12.00              | 2.03            |                  | 14.1                      | 19.1                     | 0.82             |
| 10AH-1        | 50H            | 15.875 | 10.16              | 9.40                       | 5.08               | 22.1       | 23.4               | 15.09              | 2.42            |                  | 22.2                      | 30.2                     | 1.25             |
| 12AH-1        | 60H            | 19.05  | 11.91              | 12.57                      | 5.94               | 29.3       | 31.0               | 18.00              | 3.25            |                  | 31.8                      | 42.7                     | 1.87             |
| 16AH-1        | 80H            | 25.40  | 15.88              | 15.75                      | 7.92               | 36.2       | 37.7               | 24.00              | 4.00            |                  | 56.7                      | 71.4                     | 3.10             |
| 20AH-1        | 100H           | 31.75  | 19.05              | 18.90                      | 9.53               | 43.6       | 46.9               | 30.00              | 4.80            |                  | 88.5                      | 112.4                    | 4.52             |
| 24AH-1        | 120H           | 38.10  | 22.23              | 25.22                      | 11.10              | 53.5       | 57.5               | 35.70              | 5.60            |                  | 127.0                     | 160.9                    | 6.60             |
| 28AH-1        | 140H           | 44.45  | 25.40              | 25.22                      | 12.70              | 57.6       | 62.2               | 41.00              | 6.40            |                  | 172.4                     | 217.3                    | 8.30             |
| 32AH-1        | 160H           | 50.80  | 28.58              | 31.55                      | 14.27              | 68.2       | 73.0               | 47.80              | 7.20            |                  | 226.8                     | 285.8                    | 11.10            |
| 40AH-1        | 200H           | 63.50  | 39.68              | 37.85                      | 19.85              | 86.6       | 93.5               | 60.00              | 9.50            |                  | 353.8                     | 444.5                    | 19.16            |
| 12AH-2        | 60H-2          | 19.05  | 11.91              | 12.57                      | 5.94               | 55.3       | 57.1               | 18.00              | 3.25            | 26.11            | 63.6                      | 84.5                     | 3.71             |
| 16AH-2        | 80H-2          | 25.40  | 15.88              | 15.75                      | 7.92               | 68.8       | 70.3               | 24.00              | 4.00            | 32.59            | 113.4                     | 145.3                    | 6.15             |
| 20AH-2        | 100H-2         | 31.75  | 19.05              | 18.90                      | 9.53               | 82.7       | 86.0               | 30.00              | 4.80            | 39.09            | 177.0                     | 225.9                    | 9.03             |
| 24AH-2        | 120H-2         | 38.10  | 22.23              | 25.22                      | 11.10              | 102.4      | 106.4              | 35.70              | 5.60            | 48.87            | 254.0                     | 322.7                    | 13.13            |
| 28AH-2        | 140H-2         | 44.45  | 25.40              | 25.22                      | 12.70              | 109.8      | 114.4              | 41.00              | 6.40            | 52.20            | 344.8                     | 437.7                    | 16.60            |
| 32AH-2        | 160H-2         | 50.80  | 28.58              | 31.55                      | 14.27              | 130.1      | 134.9              | 47.80              | 7.20            | 61.90            | 453.6                     | 571.6                    | 22.06            |
| 40AH-2        | 200H-2         | 63.50  | 39.68              | 37.85                      | 19.85              | 164.9      | 171.8              | 60.00              | 9.50            | 78.31            | 707.6                     | 894.9                    | 38.11            |
| 12AH-3        | 60H-3          | 19.05  | 11.91              | 12.57                      | 5.94               | 81.4       | 83.2               | 18.00              | 3.25            | 26.11            | 95.4                      | 113.9                    | 5.54             |
| 16AH-3        | 80H-3          | 25.40  | 15.88              | 15.75                      | 7.92               | 101.4      | 102.9              | 24.00              | 4.00            | 32.59            | 170.1                     | 203.5                    | 9.42             |
| 20AH-3        | 100H-3         | 31.75  | 19.05              | 18.90                      | 9.53               | 121.8      | 125.1              | 30.00              | 4.80            | 39.09            | 265.5                     | 314.8                    | 12.96            |
| 24AH-3        | 120H-3         | 38.10  | 22.23              | 25.22                      | 11.10              | 151.2      | 155.2              | 35.70              | 5.60            | 48.87            | 381.0                     | 444.7                    | 19.64            |
| 28AH-3        | 140H-3         | 44.45  | 25.40              | 25.22                      | 12.70              | 162.0      | 166.6              | 41.00              | 6.40            | 52.20            | 517.2                     | 598.4                    | 24.90            |
| 32AH-3        | 160H-3         | 50.80  | 28.58              | 31.55                      | 14.27              | 192.0      | 196.8              | 47.80              | 7.20            | 61.90            | 680.4                     | 787.3                    | 30.10            |
| 40AH-3        | 200H-3         | 63.50  | 39.68              | 37.85                      | 19.85              | 243.2      | 250.1              | 60.00              | 9.50            | 78.31            | 1061.4                    | 1228.2                   | 57.06            |

# Data Sheet

## ANSI Roller Chain

CSUK Chain has been developed and manufactured to the highest standards. Using years of experience combined with the latest technologies and next generation innovation, we've enhanced fatigue and wear life to meet the toughest of applications. Resulting in less downtime, more productivity and lower Total Cost of Ownership.

- CSUK Chain features:
- Solid Bush design
  - Shot-peened plates
  - Multi-stage plate holing
  - Optimised interference fits
  - Enhanced initial lubrication
  - Dynamic pre-loading

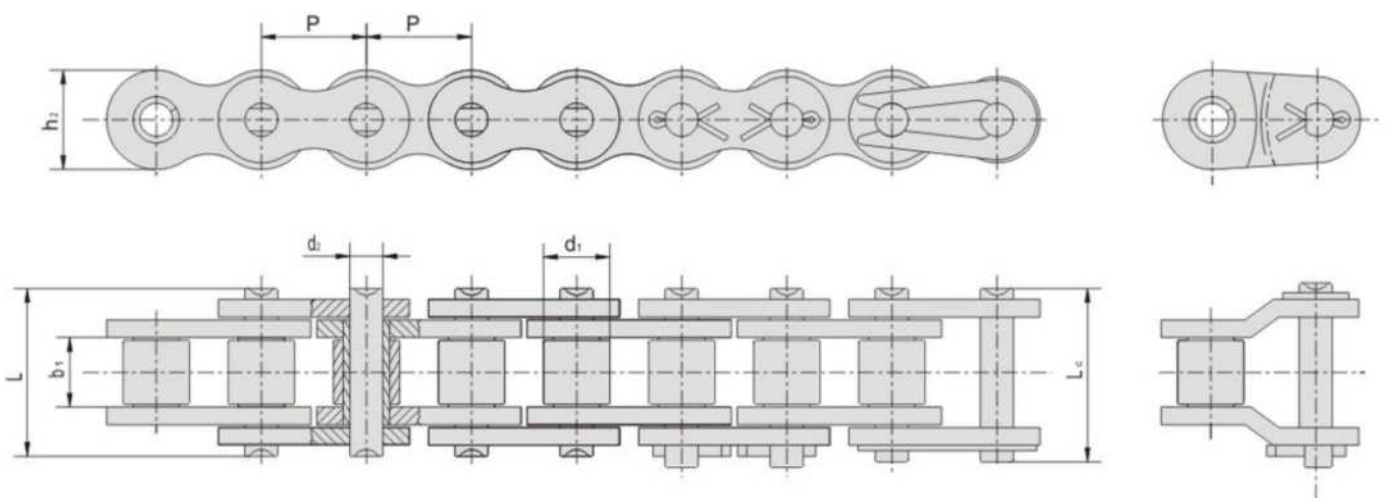

| DIN/ISO           | ANSI           | Pitch  | Roller diameter    | Width between inner plates | Pin diameter       | Pin length |                    | Inner plate depth  | Transverse pitch | Ultimate tensile strength | Average tensile strength | Weight per meter |
|-------------------|----------------|--------|--------------------|----------------------------|--------------------|------------|--------------------|--------------------|------------------|---------------------------|--------------------------|------------------|
| DIN/ISO Chain No. | ANSI Chain No. | P      | d <sub>1</sub> max | b <sub>1</sub> min         | d <sub>2</sub> max | L max      | L <sub>c</sub> max | h <sub>c</sub> max | pt               | Q <sub>min</sub>          | Q <sub>o</sub>           | q                |
|                   |                | mm     | mm                 | mm                         | mm                 | mm         | mm                 | mm                 | mm               | KN                        | KN                       | kg/m             |
|                   | *10            | 3.175  | 1.7                | 1.6                        | 1.16               | 4.45       | /                  | 2.90               | /                | 1.2                       | 1.30                     | 0.039            |
|                   | *15            | 4.7625 | 2.48               | 2.4                        | 1.62               | 6.25       | /                  | 4.30               | /                | 1.8                       | 2.00                     | 0.089            |
| 04C-1             | *25            | 6.35   | 3.30               | 3.10                       | 2.31               | 7.80       | 8.90               | 5.90               | /                | 3.5                       | 4.60                     | 0.15             |
| 06C-1             | *35            | 9.525  | 5.08               | 4.77                       | 3.58               | 12.15      | 13.10              | 8.70               | /                | 7.9                       | 10.80                    | 0.34             |
| 085-1             | 41             | 12.70  | 7.77               | 6.25                       | 3.58               | 13.75      | 15.00              | 9.91               | /                | 6.8                       | 12.60                    | 0.45             |
| 08A-1             | 40             | 12.70  | 7.92               | 7.85                       | 3.96               | 16.60      | 17.75              | 12.00              | /                | 14.1                      | 17.50                    | 0.66             |
| 10A-1             | 50             | 15.875 | 10.16              | 9.40                       | 5.08               | 20.60      | 22.00              | 15.00              | /                | 22.2                      | 29.40                    | 1.08             |
| 12A-1             | 60             | 19.05  | 11.91              | 12.57                      | 5.94               | 25.90      | 27.50              | 18.00              | /                | 31.8                      | 41.50                    | 1.59             |
| 16A-1             | 80             | 25.40  | 15.88              | 15.75                      | 7.92               | 32.80      | 34.90              | 24.00              | /                | 56.7                      | 69.40                    | 2.73             |
| 20A-1             | 100            | 31.75  | 19.05              | 18.90                      | 9.53               | 40.00      | 43.40              | 30.10              | /                | 88.5                      | 109.20                   | 3.99             |
| 24A-1             | 120            | 38.10  | 22.23              | 25.22                      | 11.10              | 50.45      | 53.50              | 36.10              | /                | 127.0                     | 156.30                   | 5.62             |
| 28A-1             | 140            | 44.45  | 25.40              | 25.22                      | 12.70              | 54.40      | 58.70              | 42.10              | /                | 172.4                     | 212.00                   | 7.95             |
| 32A-1             | 160            | 50.80  | 28.58              | 31.55                      | 14.27              | 64.50      | 68.70              | 48.10              | /                | 226.8                     | 278.90                   | 10.1             |
| 36A-1             | 180            | 57.15  | 35.71              | 35.48                      | 17.46              | 72.80      | 78.60              | 53.60              | /                | 280.2                     | 341.80                   | 13.59            |
| 40A-1             | 200            | 63.50  | 39.68              | 37.85                      | 19.84              | 79.50      | 85.50              | 60.00              | /                | 353.8                     | 431.60                   | 16.86            |
| 48A-1             | 240            | 76.2   | 47.63              | 47.4                       | 23.81              | 95.50      | 102.50             | 71.80              | /                | 510.3                     | 622.50                   | 24.4             |


# Data Sheet

## ANSI Stainless Steel Roller Chain



CSUK Chain has been developed and manufactured to the highest standards. Using years of experience combined with the latest technologies and next generation innovation, we've enhanced fatigue and wear life to meet the toughest of applications. Resulting in less downtime, more productivity and lower Total Cost of Ownership.

- CSUK Chain features:
- Solid Bush design
  - Shot-peened plates
  - Multi-stage plate holing
  - Optimised interference fits
  - Enhanced initial lubrication
  - Dynamic pre-loading


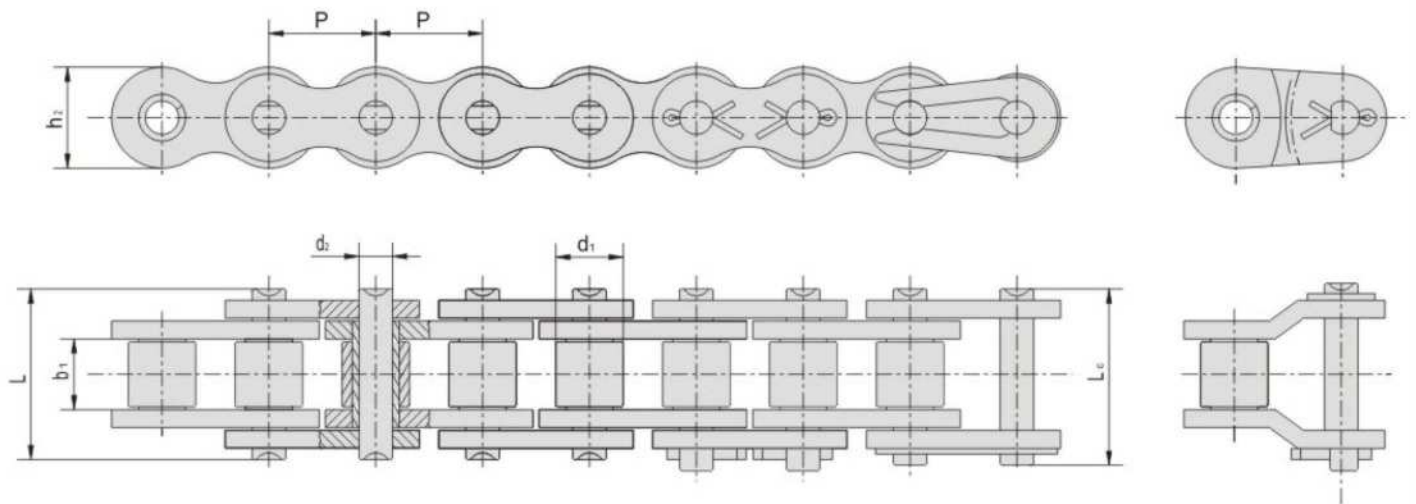


| Chain No. | Pitch  | Roller diameter    | Width Between inner plates | Pin diameter       | Pin length |                    | Inner plate depth  | Ultimate tensile strength | Average tensile strength | Weight per meter |
|-----------|--------|--------------------|----------------------------|--------------------|------------|--------------------|--------------------|---------------------------|--------------------------|------------------|
|           | P      | d <sub>1</sub> max | b <sub>1</sub> min         | d <sub>2</sub> max | L max      | L <sub>c</sub> max | h <sub>2</sub> max | Q min                     | Q <sub>0</sub>           | q                |
|           | mm     | mm                 | mm                         | mm                 | mm         | mm                 | mm                 | kN                        | kN                       | kg/m             |
| 25SS      | 6.35   | 3.30               | 3.10                       | 2.31               | 7.8        | 8.45               | 5.9                | 2.34                      | 2.5                      | 0.14             |
| 35SS      | 9.525  | 5.08               | 4.68                       | 3.58               | 12.15      | 13.1               | 9.0                | 5.1                       | 7.5                      | 0.35             |
| 40SS      | 12.7   | 7.92               | 7.85                       | 3.96               | 16.6       | 17.75              | 12.0               | 10.2                      | 12.1                     | 0.65             |
| 50SS      | 15.875 | 10.16              | 9.40                       | 5.08               | 20.9       | 22.2               | 15.09              | 16.2                      | 21.2                     | 1.04             |
| 60SS      | 19.05  | 11.91              | 12.57                      | 5.94               | 25.9       | 27.5               | 18.0               | 23.6                      | 25.6                     | 1.55             |
| 80SS      | 25.4   | 15.88              | 15.75                      | 7.92               | 32.8       | 34.9               | 24.0               | 41.0                      | 48.7                     | 2.63             |
| 100SS     | 31.75  | 19.05              | 18.90                      | 9.53               | 40.0       | 43.4               | 30.1               | 59.4                      | 62.3                     | 3.99             |
| 120SS     | 38.1   | 22.23              | 25.22                      | 11.1               | 50.45      | 53.5               | 36.1               | 92.8                      | 97.3                     | 5.87             |
| 05BSS     | 8.0    | 5.00               | 3.00                       | 2.31               | 8.0        | 8.9                | 7.11               | 3.3                       | 4.2                      | 0.182            |
| 06BSS     | 9.525  | 6.35               | 5.72                       | 3.28               | 13.2       | 14.2               | 8.2                | 4.5                       | 5.7                      | 0.381            |
| 08BSS     | 12.7   | 8.51               | 7.76                       | 4.45               | 16.7       | 18.0               | 11.8               | 10.0                      | 12.2                     | 0.737            |
| 10BSS     | 15.875 | 10.16              | 9.65                       | 5.08               | 19.6       | 21.0               | 14.7               | 14.0                      | 16.2                     | 0.949            |
| 12BSS     | 19.05  | 12.07              | 11.68                      | 5.72               | 22.5       | 24.0               | 16.1               | 15.3                      | 17.7                     | 1.216            |
| 16BSS     | 25.4   | 15.88              | 17.02                      | 8.28               | 36         | 37.2               | 21.05              | 40.6                      | 46.7                     | 2.767            |
| 20BSS     | 31.75  | 19.05              | 19.56                      | 10.19              | 41.1       | 44.7               | 26.3               | 56.0                      | 64.3                     | 3.68             |

## ANSI Straight Side Plate Roller Chain

CSUK Chain has been developed and manufactured to the highest standards. Using years of experience combined with the latest technologies and next generation innovation, we've enhanced fatigue and wear life to meet the toughest of applications. Resulting in less downtime, more productivity and lower Total Cost of Ownership.

- CSUK Chain features:
- Solid Bush design
  - Shot-peened plates
  - Multi-stage plate holing
  - Optimised interference fits
  - Enhanced initial lubrication
  - Dynamic pre-loading

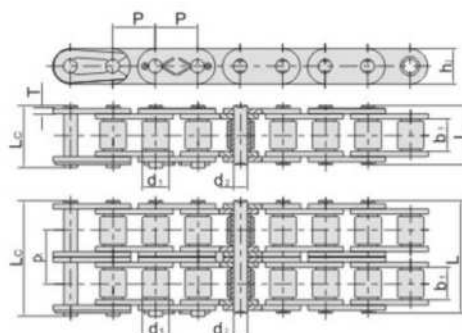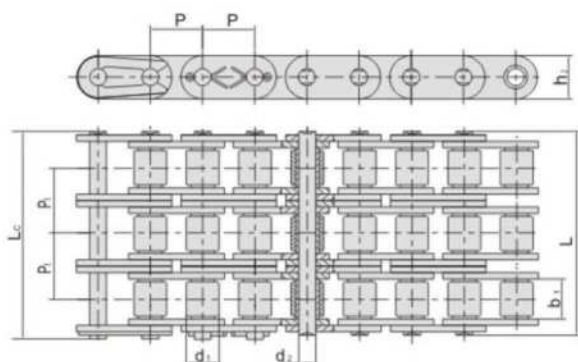


| SIO           | ANSI           | Pitch  | Roller diameter    | Width between inner plates | Pin length |                    | Pin diameter       | Inner plate depth  | Plate thickness | Transverse pitch | Ultimate tensile strength | Average tensile strength | Weight per meter |
|---------------|----------------|--------|--------------------|----------------------------|------------|--------------------|--------------------|--------------------|-----------------|------------------|---------------------------|--------------------------|------------------|
| SIO Chain No. | ANSI Chain No. | P      | d <sub>1</sub> max | b <sub>1</sub> min         | L max      | L <sub>c</sub> max | d <sub>2</sub> max | h <sub>2</sub> max | T               | Pt               | Q min                     | Q <sub>o</sub>           | q                |
|               |                | mm     | mm                 | mm                         | mm         | mm                 | mm                 | mm                 | mm              | mm               | KN                        | KN                       | kg/m             |
|               | *C35           | 9.525  | 5.08               | 4.68                       | 12.15      | 13.1               | 3.58               | 9.0                | 1.30            |                  | 7.9                       | 10.8                     | 0.41             |
| C08A-1        | C40            | 12.70  | 7.92               | 7.85                       | 16.60      | 17.75              | 3.96               | 12.00              | 1.50            |                  | 14.1                      | 17.5                     | 0.73             |
| C10A-1        | C50            | 15.875 | 10.16              | 9.40                       | 20.90      | 22.2               | 5.08               | 15.09              | 2.03            |                  | 22.2                      | 29.4                     | 1.23             |
| C12A-1        | C60            | 19.05  | 11.91              | 12.57                      | 25.90      | 27.5               | 5.94               | 18.00              | 2.42            |                  | 31.8                      | 41.5                     | 1.81             |
| C16A-1        | C80            | 25.40  | 15.88              | 15.75                      | 32.80      | 34.90              | 7.92               | 24.00              | 3.25            |                  | 56.7                      | 69.4                     | 3.09             |
| C20A-1        | C100           | 31.75  | 19.05              | 18.90                      | 40.00      | 43.40              | 9.53               | 30.10              | 4.00            |                  | 88.5                      | 109.2                    | 4.56             |
| C24A-1        | C120           | 38.10  | 22.23              | 25.22                      | 50.45      | 53.50              | 11.10              | 36.10              | 4.80            |                  | 127.0                     | 156.3                    | 6.86             |
| C28A-1        | C140           | 44.45  | 25.40              | 25.22                      | 54.40      | 59.00              | 12.70              | 42.10              | 5.60            |                  | 172.4                     | 212.0                    | 8.49             |
| C32A-1        | C160           | 50.80  | 28.58              | 31.55                      | 64.50      | 68.70              | 14.27              | 48.10              | 6.40            |                  | 226.8                     | 276.9                    | 11.50            |
| C08A-2        | C40-2          | 12.70  | 7.92               | 7.85                       | 31.10      | 32.25              | 3.96               | 12.00              | 1.50            | 14.38            | 28.2                      | 35.9                     | 1.43             |
| C10A-2        | C50-2          | 15.875 | 10.16              | 9.40                       | 39.00      | 40.30              | 5.08               | 15.09              | 2.03            | 18.11            | 44.4                      | 58.1                     | 2.42             |
| C12A-2        | C60-2          | 19.05  | 11.91              | 12.57                      | 48.80      | 50.30              | 5.94               | 18.00              | 2.42            | 22.78            | 63.6                      | 82.1                     | 3.58             |
| C16A-2        | C80-2          | 25.40  | 15.88              | 15.75                      | 62.70      | 64.20              | 7.92               | 24.00              | 3.25            | 29.29            | 113.4                     | 141.8                    | 6.12             |
| C20A-2        | C100-2         | 31.75  | 19.05              | 18.90                      | 76.20      | 80.50              | 9.53               | 30.10              | 4.00            | 35.76            | 177.0                     | 219.4                    | 9.08             |
| C24A-2        | C120-2         | 38.10  | 22.23              | 25.22                      | 95.80      | 99.70              | 11.10              | 36.10              | 4.80            | 45.44            | 254.0                     | 314.9                    | 13.60            |
| C28A-2        | C140-2         | 44.45  | 25.40              | 25.22                      | 103.30     | 107.90             | 12.70              | 42.10              | 5.60            | 48.87            | 344.8                     | 427.5                    | 16.86            |
| C32A-2        | C160-2         | 50.80  | 28.58              | 31.55                      | 123.30     | 128.10             | 14.27              | 48.10              | 6.40            | 58.55            | 453.6                     | 562.4                    | 22.90            |
| C08A-3        | C40-3          | 12.70  | 7.92               | 7.85                       | 45.60      | 47.00              | 3.96               | 12.00              | 1.50            | 14.38            | 42.3                      | 50.0                     | 2.14             |
| C10A-3        | C50-3          | 15.875 | 10.16              | 9.40                       | 57.40      | 59.10              | 5.08               | 15.09              | 2.03            | 18.11            | 66.6                      | 77.8                     | 3.62             |
| C12A-3        | C60-3          | 19.05  | 11.91              | 12.57                      | 71.50      | 73.20              | 5.94               | 18.00              | 2.42            | 22.78            | 95.4                      | 111.1                    | 5.36             |
| C16A-3        | C80-3          | 25.40  | 15.88              | 15.75                      | 91.70      | 93.50              | 7.94               | 24.00              | 3.25            | 29.29            | 170.1                     | 198.4                    | 9.10             |
| C20A-3        | C100-3         | 31.75  | 19.05              | 18.90                      | 112.20     | 116.30             | 9.53               | 30.10              | 4.00            | 35.76            | 265.5                     | 309.6                    | 13.60            |
| C24A-3        | C120-3         | 38.10  | 22.23              | 25.22                      | 141.40     | 145.20             | 11.10              | 36.10              | 4.80            | 45.44            | 381.0                     | 437.2                    | 20.43            |
| C28A-3        | C140-3         | 44.45  | 25.40              | 25.22                      | 151.8      | 156.80             | 12.70              | 42.10              | 5.60            | 48.47            | 517.2                     | 593.3                    | 25.23            |
| C32A-3        | C160-3         | 50.80  | 28.58              | 31.55                      | 181.8      | 186.60             | 14.27              | 48.10              | 6.40            | 58.55            | 680.4                     | 780.6                    | 34.19            |

# Data Sheet

## BS Roller Chain

CSUK Chain has been developed and manufactured to the highest standards. Using years of experience combined with the latest technologies and next generation innovation, we've enhanced fatigue and wear life to meet the toughest of applications. Resulting in less downtime, more productivity and lower Total Cost of Ownership.

- CSUK Chain features:
- Solid Bush design
  - Shot-peened plates
  - Multi-stage plate holing
  - Optimised interference fits
  - Enhanced initial lubrication
  - Dynamic pre-loading

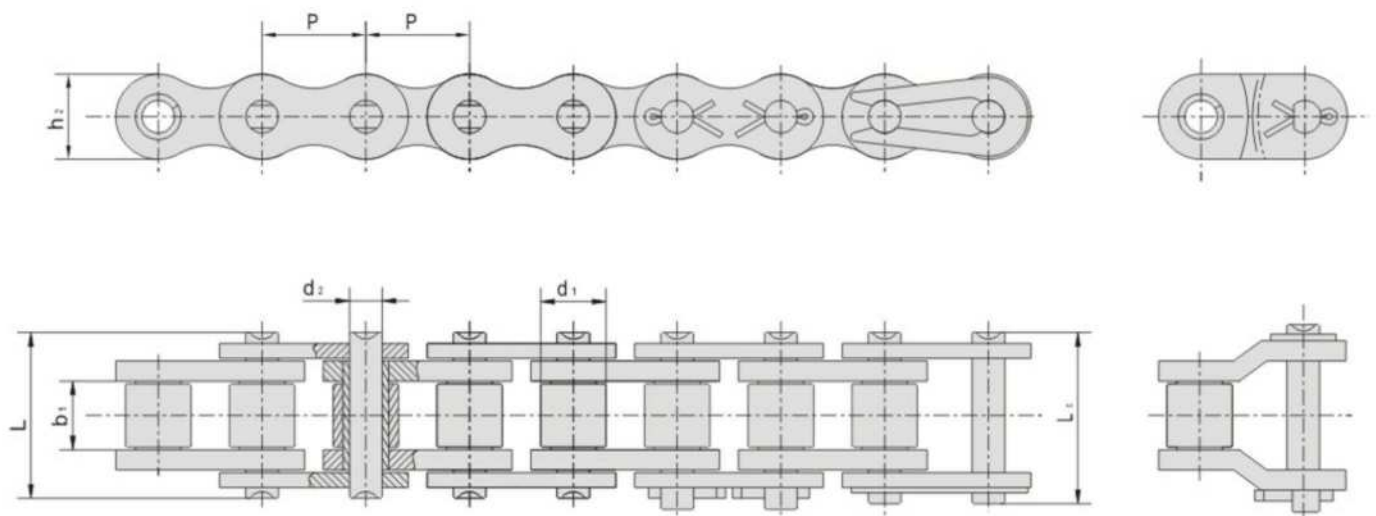


| DIN/ISO           | Pitch  | Roller diameter    | Width between inner plates | Pin diameter       | Pin length |                    | Inner plate depth  | Transverse pitch | Ultimate tensile strength | Average tensile strength | Weight per meter |
|-------------------|--------|--------------------|----------------------------|--------------------|------------|--------------------|--------------------|------------------|---------------------------|--------------------------|------------------|
| DIN/ISO Chain No. | P      | d <sub>1</sub> max | b <sub>1</sub> min         | d <sub>2</sub> max | L max      | L <sub>c</sub> max | h <sub>c</sub> max | pt               | Q min                     | Q <sub>o</sub>           | q                |
|                   | mm     | mm                 | mm                         | mm                 | mm         | mm                 | mm                 | mm               | KN                        | KN                       | kg/m             |
| 04B-1             | 6.0    | 4.00               | 2.80                       | 1.85               | 6.80       | 7.1                | 5.00               | /                | 3.0                       | 3.2                      | 0.12             |
| 05B-1             | 8.0    | 5.00               | 3.00                       | 2.31               | 8.00       | 8.9                | 7.00               | /                | 5.0                       | 5.9                      | 0.19             |
| 06B-1             | 9.525  | 6.35               | 5.72                       | 3.28               | 13.20      | 14.2               | 8.20               | /                | 9.0                       | 10.4                     | 0.42             |
| 08B-1             | 12.70  | 8.51               | 7.75                       | 4.45               | 16.50      | 18.0               | 11.80              | /                | 18.0                      | 19.4                     | 0.71             |
| 10B-1             | 15.875 | 10.16              | 9.65                       | 5.08               | 19.60      | 21.0               | 14.70              | /                | 22.4                      | 27.5                     | 0.95             |
| 12B-1             | 19.05  | 12.07              | 11.68                      | 5.72               | 22.50      | 24.0               | 16.10              | /                | 29.0                      | 32.2                     | 1.24             |
| 16B-1             | 25.40  | 15.88              | 17.02                      | 8.28               | 35.60      | 37.2               | 21.00              | /                | 60.0                      | 72.8                     | 2.84             |
| 20B-1             | 31.75  | 19.05              | 19.56                      | 10.19              | 40.80      | 44.2               | 26.30              | /                | 95.0                      | 106.7                    | 4.04             |
| 24B-1             | 38.10  | 25.40              | 25.40                      | 14.63              | 53.30      | 58.0               | 33.30              | /                | 160.0                     | 178.0                    | 7.14             |
| 28B-1             | 44.45  | 27.94              | 30.99                      | 15.90              | 65.00      | 70.3               | 36.80              | /                | 200.0                     | 222.0                    | 9.48             |
| 32B-1             | 50.80  | 29.21              | 30.99                      | 17.81              | 65.20      | 71.0               | 42.00              | /                | 250.0                     | 227.5                    | 10.19            |
| 40B-1             | 63.50  | 39.37              | 38.10                      | 22.89              | 82.20      | 89.2               | 52.96              | /                | 355.0                     | 394.0                    | 16.2             |
| 48B-1             | 76.20  | 48.26              | 45.72                      | 29.24              | 99.10      | 107.00             | 63.80              | /                | 560.0                     | 621.6                    | 25.52            |
| 56B-1             | 88.90  | 53.98              | 53.34                      | 34.32              | 114.60     | 123.00             | 77.80              | /                | 850.0                     | 940.0                    | 35.53            |
| 64B-1             | 101.60 | 63.50              | 60.96                      | 39.40              | 130.30     | 140.00             | 89.67              | /                | 1120.0                    | 1240                     | 45.77            |
| 72B-1             | 114.30 | 72.39              | 68.58                      | 44.48              | 147.00     | 156.00             | 103.60             | /                | 1400.0                    | 1550                     | 60.5             |

# Data Sheet

## BS Stainless Steel Roller Chain

CSUK Chain has been developed and manufactured to the highest standards. Using years of experience combined with the latest technologies and next generation innovation, we've enhanced fatigue and wear life to meet the toughest of applications. Resulting in less downtime, more productivity and lower Total Cost of Ownership.

- CSUK Chain features:
- Solid Bush design
  - Shot-peened plates
  - Multi-stage plate holing
  - Optimised interference fits
  - Enhanced initial lubrication
  - Dynamic pre-loading

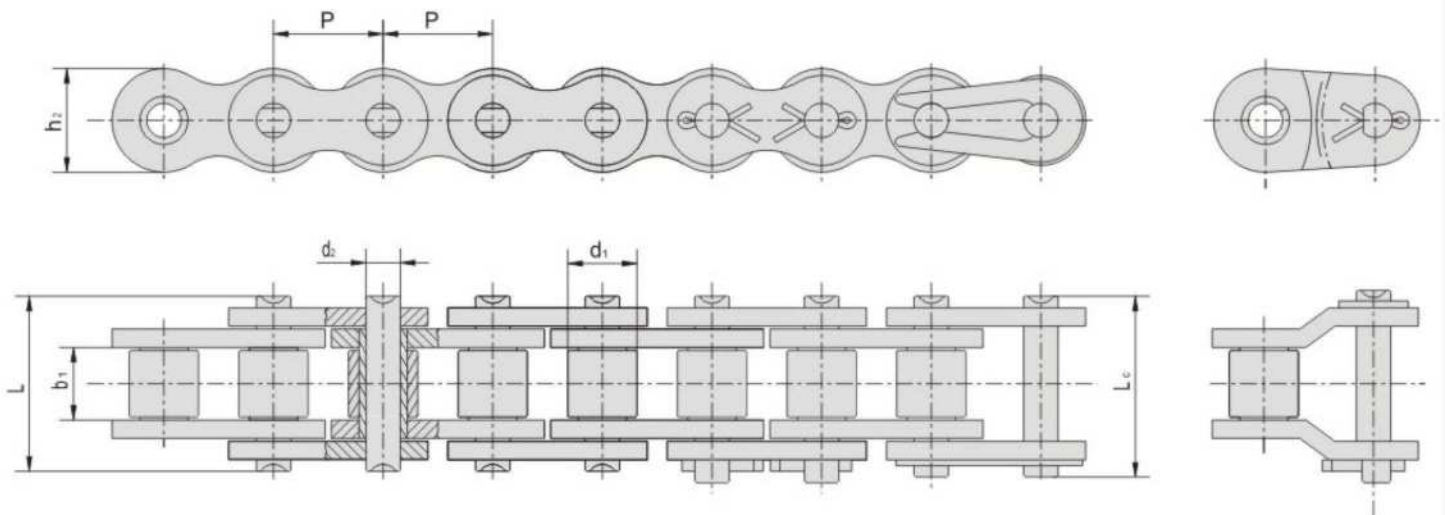


| UNIBear Chain No. | Pitch  | Roller diameter    | Width Between inner plates | Pin diameter       | Pin length |                    | Inner plate depth  | Ultimate tensile strength | Average tensile strength | Weight per meter |
|-------------------|--------|--------------------|----------------------------|--------------------|------------|--------------------|--------------------|---------------------------|--------------------------|------------------|
|                   | P      | d <sub>1</sub> max | b <sub>1</sub> min         | d <sub>2</sub> max | L max      | L <sub>c</sub> max | h <sub>2</sub> max | Q min                     | Q <sub>0</sub>           | q                |
|                   | mm     | mm                 | mm                         | mm                 | mm         | mm                 | mm                 | kN                        | kN                       | kg/m             |
| 25SS              | 6.35   | 3.30               | 3.10                       | 2.31               | 7.8        | 8.45               | 5.9                | 2.34                      | 2.5                      | 0.14             |
| 35SS              | 9.525  | 5.08               | 4.68                       | 3.58               | 12.15      | 13.1               | 9.0                | 5.1                       | 7.5                      | 0.35             |
| 40SS              | 12.7   | 7.92               | 7.85                       | 3.96               | 16.6       | 17.75              | 12.0               | 10.2                      | 12.1                     | 0.65             |
| 50SS              | 15.875 | 10.16              | 9.40                       | 5.08               | 20.9       | 22.2               | 15.09              | 16.2                      | 21.2                     | 1.04             |
| 60SS              | 19.05  | 11.91              | 12.57                      | 5.94               | 25.9       | 27.5               | 18.0               | 23.6                      | 25.6                     | 1.55             |
| 80SS              | 25.4   | 15.88              | 15.75                      | 7.92               | 32.8       | 34.9               | 24.0               | 41.0                      | 48.7                     | 2.63             |
| 100SS             | 31.75  | 19.05              | 18.90                      | 9.53               | 40.0       | 43.4               | 30.1               | 59.4                      | 62.3                     | 3.99             |
| 120SS             | 38.1   | 22.23              | 25.22                      | 11.1               | 50.45      | 53.5               | 36.1               | 92.8                      | 97.3                     | 5.87             |
| 05BSS             | 8.0    | 5.00               | 3.00                       | 2.31               | 8.0        | 8.9                | 7.11               | 3.3                       | 4.2                      | 0.182            |
| 06BSS             | 9.525  | 6.35               | 5.72                       | 3.28               | 13.2       | 14.2               | 8.2                | 4.5                       | 5.7                      | 0.381            |
| 08BSS             | 12.7   | 8.51               | 7.76                       | 4.45               | 16.7       | 18.0               | 11.8               | 10.0                      | 12.2                     | 0.737            |
| 10BSS             | 15.875 | 10.16              | 9.65                       | 5.08               | 19.6       | 21.0               | 14.7               | 14.0                      | 16.2                     | 0.949            |
| 12BSS             | 19.05  | 12.07              | 11.68                      | 5.72               | 22.5       | 24.0               | 16.1               | 15.3                      | 17.7                     | 1.216            |
| 16BSS             | 25.4   | 15.88              | 17.02                      | 8.28               | 36         | 37.2               | 21.05              | 40.6                      | 46.7                     | 2.767            |
| 20BSS             | 31.75  | 19.05              | 19.56                      | 10.19              | 41.1       | 44.7               | 26.3               | 56.0                      | 64.3                     | 3.68             |

# Data Sheet

## BS Straight Side Plate Chain

CSUK Chain has been developed and manufactured to the highest standards. Using years of experience combined with the latest technologies and next generation innovation, we've enhanced fatigue and wear life to meet the toughest of applications. Resulting in less downtime, more productivity and lower Total Cost of Ownership.



- CSUK Chain features:
- Solid Bush design
  - Shot-peened plates
  - Multi-stage plate holing
  - Optimised interference fits
  - Enhanced initial lubrication
  - Dynamic pre-loading

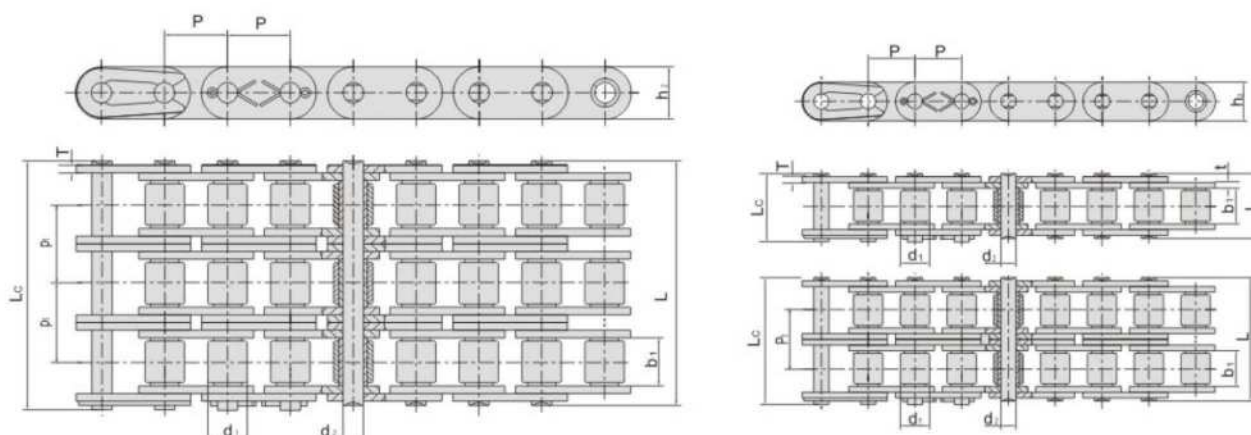

| ISO           | Pitch  | Roller diameter    | Width between inner plates | Pin diameter       | Pin length |                    | Inner plate depth  | Plate thickness | Transverse pitch | Ultimate tensile strength | Average tensile strength | Weight per meter |
|---------------|--------|--------------------|----------------------------|--------------------|------------|--------------------|--------------------|-----------------|------------------|---------------------------|--------------------------|------------------|
|               |        |                    |                            |                    |            |                    |                    |                 |                  |                           |                          |                  |
|               |        |                    |                            |                    |            |                    |                    |                 |                  |                           |                          |                  |
| ISO Chain No. | P      | d <sub>1</sub> max | b <sub>1</sub> min         | d <sub>2</sub> max | L max      | L <sub>c</sub> max | h <sub>2</sub> max | t/T             | Pt               | Q <sub>min</sub>          | Q <sub>0</sub>           | q                |
|               | mm     | mm                 | mm                         | mm                 | mm         | mm                 | mm                 | mm              | mm               | KN                        | KN                       | kg/m             |
| C08B-1        | 12.70  | 8.51               | 7.75                       | 4.45               | 16.7       | 18.0               | 11.8               | 1.60            |                  | 18.0                      | 19.5                     | 0.79             |
| C10B-1        | 15.875 | 10.16              | 9.65                       | 5.08               | 19.6       | 21.0               | 14.7               | 1.70            |                  | 22.4                      | 27.5                     | 1.06             |
| C12B-1        | 19.05  | 12.07              | 11.68                      | 5.72               | 22.5       | 24.0               | 16.0               | 1.85            |                  | 29.0                      | 32.2                     | 1.19             |
| C16B-1        | 25.40  | 15.88              | 17.02                      | 8.28               | 36.0       | 37.2               | 21/24.0            | 4.15/3.1        |                  | 60.0                      | 72.8                     | 2.91             |
| C20B-1        | 31.75  | 19.05              | 19.56                      | 10.19              | 41.1       | 44.7               | 26.4               | 4.5/3.5         |                  | 95.0                      | 106.7                    | 4.19             |
| C24B-1        | 38.10  | 25.40              | 25.40                      | 14.63              | 53.3       | 58.0               | 33.2               | 6.0/5.0         |                  | 160.0                     | 178.0                    | 7.47             |
| C28B-1        | 44.45  | 27.94              | 30.99                      | 15.90              | 65.0       | 70.3               | 36.9               | 7.5/6.4         |                  | 200.0                     | 222.0                    | 9.90             |
| C32B-1        | 50.80  | 29.21              | 30.99                      | 17.81              | 66.0       | 71.0               | 42.1               | 7.0/6.4         |                  | 250.0                     | 277.5                    | 10.45            |
| C08B-2        | 12.70  | 8.51               | 7.75                       | 4.45               | 31.0       | 32.1               | 11.8               | 1.60            | 13.92            | 32.0                      | 38.7                     | 1.45             |
| C10B-2        | 15.875 | 10.16              | 9.65                       | 5.08               | 36.2       | 37.5               | 14.7               | 1.70            | 16.59            | 44.5                      | 57.8                     | 2.00             |
| C12B-2        | 19.05  | 12.07              | 11.68                      | 5.72               | 42.0       | 43.6               | 16.0               | 1.85            | 19.46            | 57.8                      | 66.1                     | 2.62             |
| C16B-2        | 25.40  | 15.88              | 17.02                      | 8.28               | 68.0       | 69.1               | 21/24.0            | 4.15/3.1        | 31.88            | 106.0                     | 133.0                    | 6.10             |
| C20B-2        | 31.75  | 19.05              | 19.56                      | 10.19              | 77.8       | 81.5               | 26.4               | 4.5/3.5         | 36.45            | 170.0                     | 211.2                    | 8.23             |
| C24B-2        | 38.10  | 25.40              | 25.40                      | 14.63              | 101.7      | 106.2              | 33.2               | 6.0/5.0         | 48.36            | 280.0                     | 319.2                    | 14.77            |
| C28B-2        | 44.45  | 27.94              | 30.99                      | 15.90              | 124.6      | 129.1              | 36.9               | 7.5/6.4         | 59.56            | 360.0                     | 406.8                    | 19.82            |
| C32B-2        | 50.80  | 29.21              | 30.99                      | 17.81              | 124.6      | 129.6              | 42.1               | 7.0/6.4         | 58.55            | 450.0                     | 508.5                    | 20.94            |
| C08B-3        | 12.70  | 8.51               | 7.75                       | 4.45               | 44.9       | 46.1               | 11.8               | 1.60            | 13.92            | 47.5                      | 57.8                     | 2.10             |
| C10B-3        | 15.875 | 10.16              | 9.65                       | 5.08               | 52.8       | 54.1               | 14.7               | 1.70            | 16.59            | 66.7                      | 84.5                     | 2.87             |
| C12B-3        | 19.05  | 12.07              | 11.68                      | 5.72               | 61.5       | 63.2               | 16.0               | 1.85            | 19.46            | 86.7                      | 101.8                    | 3.89             |
| C16B-3        | 25.40  | 15.88              | 17.02                      | 8.28               | 99.8       | 102.9              | 21/24.0            | 4.15/3.1        | 31.88            | 160.0                     | 203.7                    | 9.12             |
| C20B-3        | 31.75  | 19.05              | 19.56                      | 10.19              | 114.2      | 117.9              | 26.4               | 4.5/3.5         | 36.45            | 250.08                    | 290.0                    | 11.34            |
| C24B-3        | 38.10  | 25.40              | 25.40                      | 14.63              | 150.1      | 154.6              | 33.2               | 6.0/5.0         | 48.36            | 425.0                     | 493.0                    | 22.10            |
| C28B-3        | 44.45  | 27.94              | 30.99                      | 15.90              | 184.2      | 188.7              | 36.9               | 7.5/6.4         | 59.56            | 530.0                     | 609.5                    | 29.64            |
| C32B-3        | 50.80  | 29.21              | 30.99                      | 17.81              | 183.2      | 188.2              | 42.1               | 7.0/6.4         | 58.55            | 670.0                     | 770.5                    | 31.27            |

# ANSI Straight Side Plate Roller Chain


## Technical Data Sheet

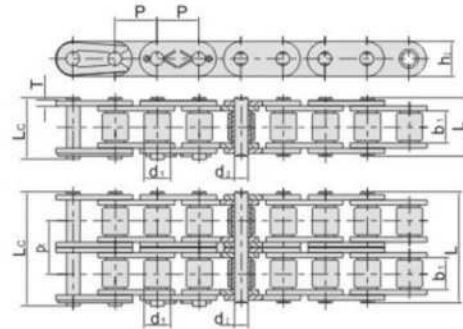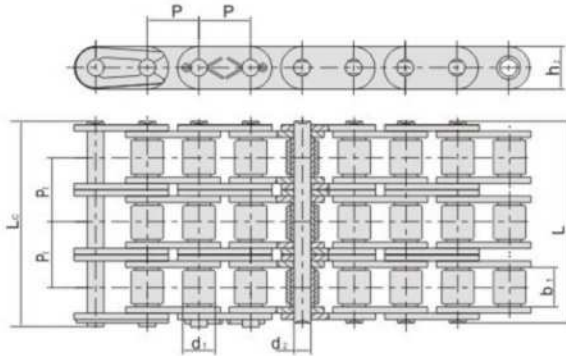

| SIO           | ANSI           | Pitch  | Roller diameter    | Width between inner plates | Pin length |                    | Pin diameter       | Inner plate depth  | Plate thickness | Transverse pitch | Ultimate tensile strength | Average tensile strength | Weight per meter |
|---------------|----------------|--------|--------------------|----------------------------|------------|--------------------|--------------------|--------------------|-----------------|------------------|---------------------------|--------------------------|------------------|
| SIO Chain No. | ANSI Chain No. | P      | d <sub>1</sub> max | b <sub>1</sub> min         | L max      | L <sub>c</sub> max | d <sub>2</sub> max | h <sub>2</sub> max | T               | Pt               | Q <sub>min</sub>          | Q <sub>a</sub>           | q                |
|               |                | mm     | mm                 | mm                         | mm         | mm                 | mm                 | mm                 | mm              | mm               | KN                        | KN                       | kg/m             |
|               | *C35           | 9.525  | 5.08               | 4.68                       | 12.15      | 13.1               | 3.58               | 9.0                | 1.30            |                  | 7.9                       | 10.8                     | 0.41             |
| C08A-1        | C40            | 12.70  | 7.92               | 7.85                       | 16.60      | 17.75              | 3.96               | 12.00              | 1.50            |                  | 14.1                      | 17.5                     | 0.73             |
| C10A-1        | C50            | 15.875 | 10.16              | 9.40                       | 20.90      | 22.2               | 5.08               | 15.09              | 2.03            |                  | 22.2                      | 29.4                     | 1.23             |
| C12A-1        | C60            | 19.05  | 11.91              | 12.57                      | 25.90      | 27.5               | 5.94               | 18.00              | 2.42            |                  | 31.8                      | 41.5                     | 1.81             |
| C16A-1        | C80            | 25.40  | 15.88              | 15.75                      | 32.80      | 34.90              | 7.92               | 24.00              | 3.25            |                  | 56.7                      | 69.4                     | 3.09             |
| C20A-1        | C100           | 31.75  | 19.05              | 18.90                      | 40.00      | 43.40              | 9.53               | 30.10              | 4.00            |                  | 88.5                      | 109.2                    | 4.56             |
| C24A-1        | C120           | 38.10  | 22.23              | 25.22                      | 50.45      | 53.50              | 11.10              | 36.10              | 4.80            |                  | 127.0                     | 156.3                    | 6.86             |
| C28A-1        | C140           | 44.45  | 25.40              | 25.22                      | 54.40      | 59.00              | 12.70              | 42.10              | 5.60            |                  | 172.4                     | 212.0                    | 8.49             |
| C32A-1        | C160           | 50.80  | 28.58              | 31.55                      | 64.50      | 68.70              | 14.27              | 48.10              | 6.40            |                  | 226.8                     | 276.9                    | 11.50            |
| C08A-2        | C40-2          | 12.70  | 7.92               | 7.85                       | 31.10      | 32.25              | 3.96               | 12.00              | 1.50            | 14.38            | 28.2                      | 35.9                     | 1.43             |
| C10A-2        | C50-2          | 15.875 | 10.16              | 9.40                       | 39.00      | 40.30              | 5.08               | 15.09              | 2.03            | 18.11            | 44.4                      | 58.1                     | 2.42             |
| C12A-2        | C60-2          | 19.05  | 11.91              | 12.57                      | 48.80      | 50.30              | 5.94               | 18.00              | 2.42            | 22.78            | 63.6                      | 82.1                     | 3.58             |
| C16A-2        | C80-2          | 25.40  | 15.88              | 15.75                      | 62.70      | 64.20              | 7.92               | 24.00              | 3.25            | 29.29            | 113.4                     | 141.8                    | 6.12             |
| C20A-2        | C100-2         | 31.75  | 19.05              | 18.90                      | 76.20      | 80.50              | 9.53               | 30.10              | 4.00            | 35.76            | 177.0                     | 219.4                    | 9.08             |
| C24A-2        | C120-2         | 38.10  | 22.23              | 25.22                      | 95.80      | 99.70              | 11.10              | 36.10              | 4.80            | 45.44            | 254.0                     | 314.9                    | 13.60            |
| C28A-2        | C140-2         | 44.45  | 25.40              | 25.22                      | 103.30     | 107.90             | 12.70              | 42.10              | 5.60            | 48.87            | 344.8                     | 427.5                    | 16.86            |
| C32A-2        | C160-2         | 50.80  | 28.58              | 31.55                      | 123.30     | 128.10             | 14.27              | 48.10              | 6.40            | 58.55            | 453.6                     | 562.4                    | 22.90            |
| C08A-3        | C40-3          | 12.70  | 7.92               | 7.85                       | 45.60      | 47.00              | 3.96               | 12.00              | 1.50            | 14.38            | 42.3                      | 50.0                     | 2.14             |
| C10A-3        | C50-3          | 15.875 | 10.16              | 9.40                       | 57.40      | 59.10              | 5.08               | 15.09              | 2.03            | 18.11            | 66.6                      | 77.8                     | 3.62             |
| C12A-3        | C60-3          | 19.05  | 11.91              | 12.57                      | 71.50      | 73.20              | 5.94               | 18.00              | 2.42            | 22.78            | 95.4                      | 111.1                    | 5.36             |
| C16A-3        | C80-3          | 25.40  | 15.88              | 15.75                      | 91.70      | 93.50              | 7.94               | 24.00              | 3.25            | 29.29            | 170.1                     | 198.4                    | 9.10             |
| C20A-3        | C100-3         | 31.75  | 19.05              | 18.90                      | 112.20     | 116.30             | 9.53               | 30.10              | 4.00            | 35.76            | 265.5                     | 309.6                    | 13.60            |
| C24A-3        | C120-3         | 38.10  | 22.23              | 25.22                      | 141.40     | 145.20             | 11.10              | 36.10              | 4.80            | 45.44            | 381.0                     | 437.2                    | 20.43            |
| C28A-3        | C140-3         | 44.45  | 25.40              | 25.22                      | 151.8      | 156.80             | 12.70              | 42.10              | 5.60            | 48.47            | 517.2                     | 593.3                    | 25.23            |
| C32A-3        | C160-3         | 50.80  | 28.58              | 31.55                      | 181.8      | 186.60             | 14.27              | 48.10              | 6.40            | 58.55            | 680.4                     | 780.6                    | 34.19            |

CSUK Chain has been developed and manufactured to the highest standards. Using years of experience combined with the latest technologies and next generation innovation, we've enhanced fatigue and wear life to meet the toughest of applications. Resulting in less downtime, more productivity and lower Total Cost of Ownership.

- CSUK Chain features:
- Solid Bush design
  - Shot-peened plates
  - Multi-stage plate holing
  - Optimised interference fits
  - Enhanced initial lubrication
  - Dynamic pre-loading

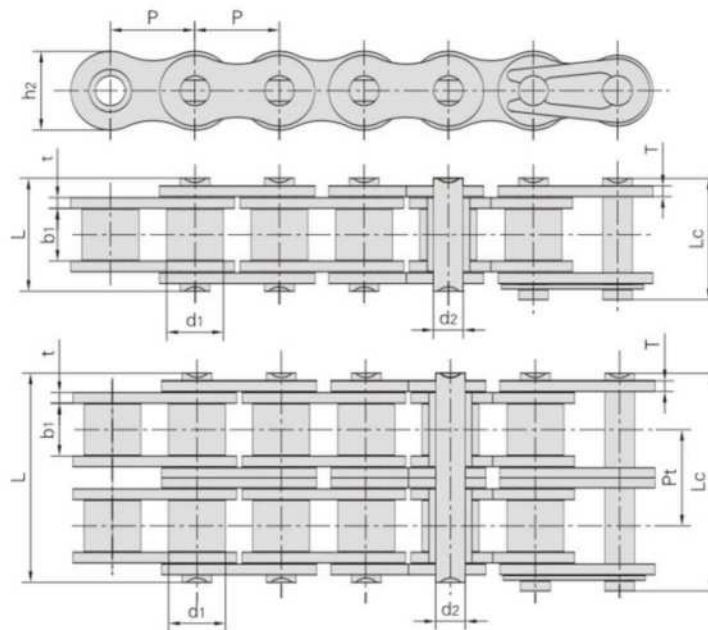

| Chain No. | Pitch  | Roller diameter | Width between inner plates | Pin diameter | Pin length |        | Inner plate depth | Plate thickness | Transverse pitch | Ultimate tensile strength | Weight per meter |
|-----------|--------|-----------------|----------------------------|--------------|------------|--------|-------------------|-----------------|------------------|---------------------------|------------------|
|           | P      | d1 max          | b1 min                     | d2 max       | L max      | Lc max | h2 max            | t/T max         | Pt               | Q min                     | q                |
|           | mm     | mm              | mm                         | mm           | mm         | mm     | mm                | mm              | mm               | KN                        | kg/m             |
| 08BSLR    | 12.700 | 8.51            | 7.75                       | 4.45         | 16.7       | 18.1   | 11.80             | 1.6             |                  | 18.0                      | 0.69             |
| 08BSLRF1  | 12.700 | 8.51            | 7.75                       | 4.45         | 17.3       | 18.7   | 11.80             | 1.6             |                  | 18.0                      | 0.72             |
| 10BSLR    | 15.875 | 10.16           | 9.65                       | 5.08         | 19.6       | 21     | 14.70             | 1.7             |                  | 22.4                      | 0.93             |
| 10BSLRF1  | 15.875 | 10.16           | 9.65                       | 5.08         | 19.9       | 21.6   | 14.70             | 1.7             |                  | 22.4                      | 0.97             |
| 12BSLR    | 19.050 | 12.07           | 11.68                      | 5.72         | 22.5       | 24     | 16.00             | 1.85            |                  | 29.0                      | 1.15             |
| 12BSLRF1  | 19.050 | 12.07           | 11.68                      | 5.72         | 22.9       | 24.7   | 16.00             | 1.85            |                  | 29.0                      | 1.19             |
| 16BSLR    | 25.400 | 15.88           | 17.02                      | 8.28         | 35.6       | 37.2   | 21.00             | 4.15/3.1        |                  | 60.0                      | 2.71             |
| 16BSLRF1  | 25.400 | 15.88           | 17.02                      | 8.28         | 36.7       | 39.7   | 21.00             | 4.15/3.1        |                  | 60.0                      | 2.73             |
| 40SLR     | 12.700 | 7.95            | 7.85                       | 3.96         | 16.3       | 17.8   | 12.00             | 1.5             |                  | 14.1                      | 0.62             |
| 50SLR     | 15.875 | 10.16           | 9.40                       | 5.08         | 20.2       | 22.2   | 15.09             | 2.03            |                  | 22.0                      | 1.02             |
| 60SLR     | 19.050 | 11.91           | 12.57                      | 5.94         | 25.9       | 27.5   | 18.00             | 2.42            |                  | 34.2                      | 1.59             |
| 80SLR     | 25.400 | 15.88           | 15.75                      | 7.92         | 32.8       | 34.1   | 24.00             | 3.25            |                  | 56.7                      | 2.60             |
| 08BSLR-2  | 12.700 | 8.51            | 7.75                       | 4.45         | 30.6       | 32     | 11.80             | 1.6             | 13.92            | 32.0                      | 1.34             |
| 10BSLR-2  | 15.875 | 10.16           | 9.65                       | 5.08         | 36.2       | 37.6   | 14.70             | 1.7             | 16.59            | 44.5                      | 1.84             |
| 12BSLR-2  | 19.050 | 12.07           | 11.68                      | 5.72         | 41.1       | 43.5   | 16.00             | 1.85            | 19.46            | 57.8                      | 2.46             |
| 16BSLR-2  | 25.400 | 15.88           | 17.02                      | 8.28         | 67.5       | 69.1   | 21.00             | 4.15/3.1        | 31.88            | 106.0                     | 5.45             |
| 40SLR-2   | 12.700 | 7.95            | 7.85                       | 3.96         | 31.0       | 32.2   | 12.00             | 1.5             | 14.38            | 28.2                      | 1.12             |
| 50SLR-2   | 15.875 | 10.16           | 9.40                       | 5.08         | 39         | 40.3   | 15.09             | 2.03            | 18.11            | 44.4                      | 2.00             |
| 60SLR-2   | 19.050 | 11.91           | 12.57                      | 5.94         | 48.8       | 50.3   | 18.00             | 2.42            | 22.78            | 68.4                      | 3.14             |
| 80SLR-2   | 25.400 | 15.88           | 15.75                      | 7.92         | 61.9       | 64.2   | 24.00             | 3.25            | 29.29            | 113.4                     | 5.32             |

# Contact Us Today

It's good to talk...

Let's come together in discussing & optimising your specific Chain Supply needs.



Howcroft Group Ltd, Unit 9, Brookfields  
Way, Manvers, Rotherham, S63 5DL



hello@howcroft.group



+44 (0)1709 878282

[www.howcroft.group](http://www.howcroft.group)

**HOWCROFT**  
group limited



chainSupply™

ROCKEN APPLE  
CLOTHING

