



CALL TODAY

UK: +44 (0) 1270 895344


IE: +353 (0) 15543922

NZ: +64 21270188

SI: +386 30 238 480

UTV products

LED LIGHTING

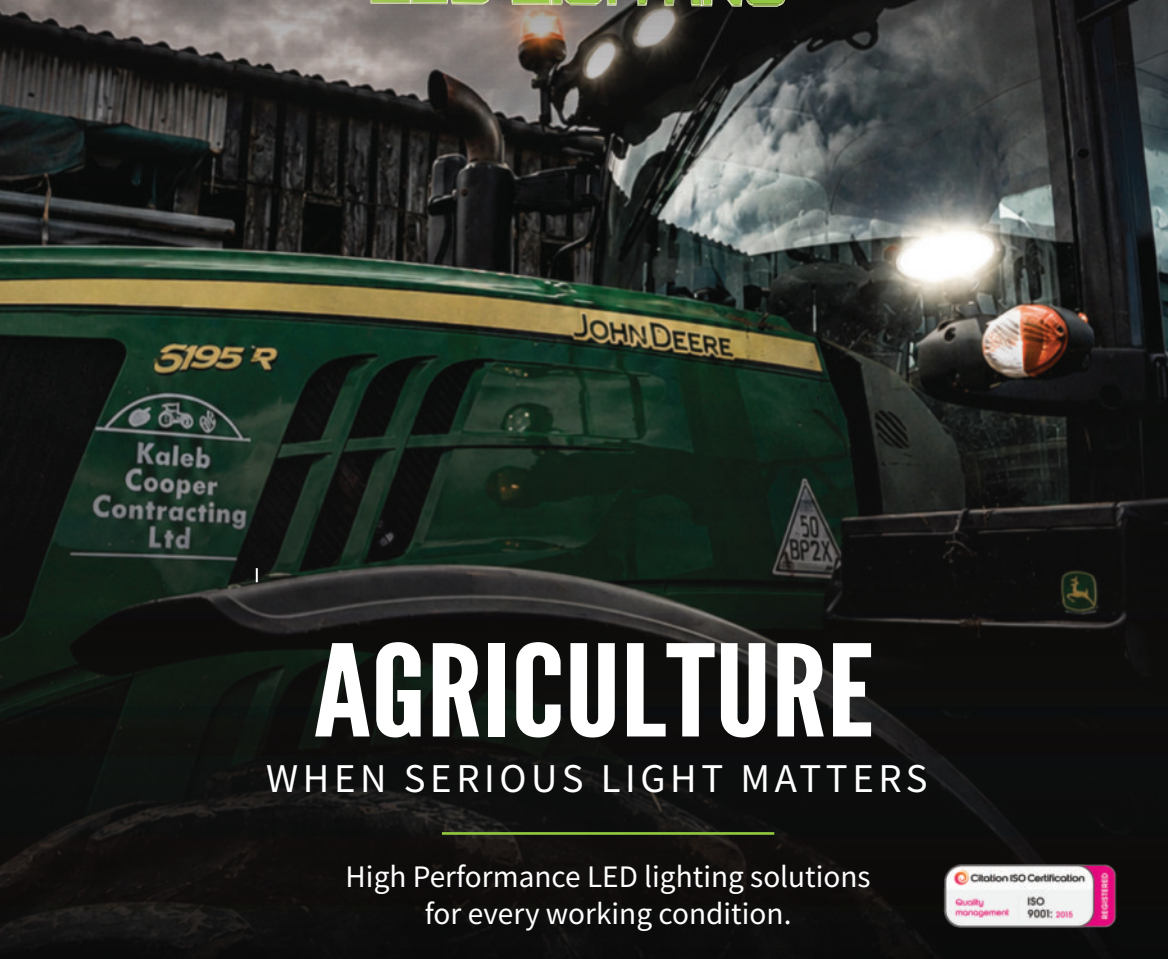

AGRICULTURE

WHEN SERIOUS LIGHT MATTERS

High Performance LED lighting solutions
for every working condition.



3x BRIGHTER
3x MORE DISTANCE
THAN FACTORY-FITTED LEDS



EASY INSTALLATION



UK DESIGNED
AND ENGINEERED



ZERO RADIO
INTERFERENCE



WEATHERPROOF
AND DUSTPROOF



UTV LED

WE MAKE LEDs.

HOW WE TEST

OUR LEDS AGAINST FACTORY-FITTED

At UTV Products, our LEDs are tested in-house against factory-fitted LEDs under controlled, like-for-like conditions. This allows us to compare the amount of usable light delivered where it actually matters.

JOHN DEERE HALOGEN



JOHN DEERE LED



THEY MAKE
TRACTORS

THE RESULTS?

3x MORE
USABLE LIGHT

Our testing has shown that UTV Products LEDs can deliver up to **3x more usable light** than factory-fitted LEDs, providing a brighter, wider and more effective working area.

More usable light means better visibility, greater awareness and safety and increased confidence when working after dark.

SEE THE DIFFERENCE

ABOUT US

Founded in 2013, UTV Products has grown from a small UK business into an international supplier of high-performance LED lighting for the agricultural, construction and forestry industries.

Managing Director Ben Bonell has a background in aviation electronics engineering and has always understood the importance of quality and reliability. Our lights are now designed and engineered by our own team, allowing us to continually improve their performance and develop new products around the needs of our customers. UTV Products is ISO 9001 certified, and every product is thoroughly tested for the tough conditions our customers work in.

Sian Bonell, was the company's Marketing Director and played a major part in building the UTV Products brand into what it is today. Sian now heads up our European businesses and continues to support the company's international growth. As a husband and wife combo they balance work and building an internationally recognised brand.


As demand has grown, we have expanded and now operate businesses in the UK, Ireland, the Netherlands, Slovenia and Canada. Power LED is our exclusive distributor for Australia and New Zealand. Our lights are trusted by customers and well-known influencers across the world, helping UTV Products become an increasingly recognised name in international vehicle lighting.



OUR STORY

UK DESIGNED AND ENGINEERED FOR **YOUR** MACHINE

With in-house design, engineering and testing, we create lighting that outperforms the market - built for real machines and real working conditions.

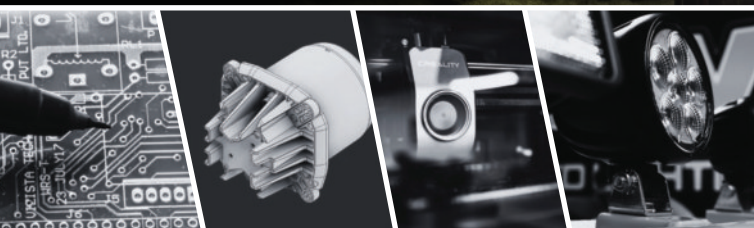

**PCB
DEVELOPMENT**



**CAD
MODELLING**



**PROTOTYPE
TESTING**



**LENS
ANALYSIS**

THE VISION

Create lighting that outperforms the market.

IDEATION & CAD DESIGN

Concepts brought to life with in-house CAD.

3D MODELS & PROTOTYPES

Designed, fitted and tested on real machines.

TESTING & CERTIFICATION

Only proven designs move to E-mark certification.

REFINEMENT & PRODUCTION

High-performance lighting built to go the distance.



Contents

WHEN SERIOUS LIGHT MATTERS

New Holland	p. 4-6
John Deere	p. 7-9
Fendt	p. 10-12
Massey Ferguson	p. 13-14
Valtra	p. 15-16
Case IH	p. 17-19
JCB	p. 20-21
Claas	p. 22-23
Merlo	p. 24
SDF and Lamborghini	p. 25-26
Universal Headlights	p. 27-28
Universal Lights	p. 29-30
Coloured Lights	p. 31
Driving Lights	p. 32
Lightbars	p. 33
Tail Lights	p. 34-35
Safety Perimeter Lights	p. 36
Marker Lights	p. 37-38
Beacons	p. 39
Strobes	p. 40
Wiring Looms & Accessories	p. 41
Side Lights & Indicators	p. 42
Powder Coating	p. 43
LUKA Essentials Work Lights & Marker Lights	p.44
LUKA Essential Tail Lights	p.45
LUKA Whip Poles	p.46

UTV
products
LED LIGHTING



NEW HOLLAND

products
UTV
LED LIGHTING

UTV300

Low beam: 30W
High beam: 30W
Halo DRL: 12W
Voltage: 9 - 36V
Waterproof and Dustproof: IP68
EMC CISPR25 Class 4
Durable polycarbonate lens
Over/Under voltage protection
Not suited to N/H T6
Dimensions: 90x90x141mm



UK, IE and NZ Road legal -
LHD version available upon request

SUITABLE FOR New Holland T7 Tier 4B,
2016 onwards.

UTV3004

Power: 4x10 CREE LED (x2)
Lumens: 3200 per light
Voltage: 9 - 32V
Waterproof and Dustproof: IP68
Durable polycarbonate lens
Stainless steel hardware
Dimensions: 85x85x50mm
*Suitable for NH 60 Series and TM
*Lights only to fit in original housing



UTV374K - TM, 40 and 60 Series

UTV375K - TS Series

UTV376K - TL, L and Super Steer

UTV387K - G and 70 Series Genesis

Low beam: 30W
High beam: 60W
DRL: 6W
Voltage: 9 - 32V
Waterproof and Dustproof: IP68
Stainless steel hardware
Over/Under voltage protection
UK, IE and NZ Road legal -
LHD version available upon request



UTV337-1K

UTV390

Low beam: 30W, 2,250lm
High beam: 50W, 3,750lm
DRL: 6W
Voltage: 9 - 32V DC
Operation Temperature: -40°C to 85°C
Waterproof and Dustproof: IP68
Colour Temperature: 6000K
EMC: CISPR 25 Class 4
Die-cast aluminum housing
Durable polycarbonate lens
UK, IE and NZ Road legal -
LHD version available upon request



UTV352K Pair

UTV353K Pair

Power: 4x10W CREE LED
Lumens: 3200LM
Voltage: 9 - 32V
Waterproof and Dustproof: IP68
EMC: CISPR 25 Class 4
Durable Polycarbonate Lens
Stainless steel hardware
Over/Under voltage protection
Dimensions: 85x85x50mm





UTV347K Pair

Power: 4x10 CREE LED (x2)
 Lumens: 3200 per light
 Voltage: 9 - 32V
 Waterproof and Dustproof: IP68
 EMC: CISPR 25 Class 4
 Durable polycarbonate lens
 Stainless steel hardware
 Dimensions: 85x85x50mm
 *Lights only to fit in original housing



UTV337-3K

Low beam: 30W, 2,250lm
 High beam: 50W, 3,750lm
 DRL: 6W
 Voltage: 9 - 32V DC
 Dimensions:
 132mm (lens diameter)
 140mm (light diameter)



UTV333 Pair

Power: 5x5W CREE LED (x2), 9x5W CREE LED (x2)
 Low beam: 30W
 High beam: 50W
 Lumens: 22400LM (pair)
 Voltage: 9-32V
 Waterproof and Dustproof: IP68
 EMC: CISPR25 CLASS 4
 UK, IE and NZ Road legal -
 LHD version available upon request




UTV310

Lumens: 3200LM
 Power: 4x10W (40W)
 Voltage: 9 - 32V
 Waterproof and dustproof: IP68
 EMC CISPR 25 Class 4
 Durable polycarbonate lens
 Stainless steel hardware
 Over/Under voltage protection



*DT Connector

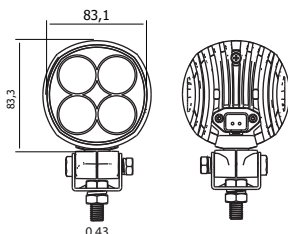

UTV366:

Lumens: 3200LM
 Voltage: 9 - 32V
 Power: 8x5W CREE LED
 Waterproof and Dustproof: IP68
 EMC CISPR 25 Class 4
 Durable polycarbonate lens
 Stainless steel hardware
 Over/Under voltage protection
 Dimensions: 152x72x61mm



SUITABLE FOR Various NH machines

UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

UTV315: 40W, 3600LM

UTV312: 80W, 6400LM

Voltage: 9 - 32V - Waterproof and Dustproof: IP68

Swivel Mount - Over/Under voltage protection

EMC CISPR25 Class 4 - Durable polycarbonate lens

Dimensions: 151x92x79mm



Side and centre mount

UTV305: 40W, 3600LM

UTV306: 80W, 6400LM



Side and centre mount



Voltage: 9 - 32V - Waterproof and Dustproof: IP68

Swivel Mount - Over/Under voltage protection

EMC CISPR25 Class 4 - Durable polycarbonate lens

Dimensions: 142x60x126mm

UTV3015

T6000 New Holland Headlight

Kit contains:

UTV300

Low beam: 30W

High beam: 30W

Halo DRL: 12W

Voltage: 9 - 36V

Waterproof and Dustproof: IP68

EMC CISPR25 Class 3

Durable polycarbonate lens

over/Under voltage protection

Not suited to N/H T6

Dimensions: 90x90x141mm

UTV323

Power: 40W

Lumens: 3200 actual lumens

Suitable 9 - 32VDC

Waterproof and Dustproof: IP68

EMC CISPR25 Class 4

Durable polycarbonate lens

over/Under voltage protection

Dimensions: 3.37 inch (85.5mm) diameter x 2 inch (50mm) depth

Flood beam



SUITABLE FOR T5, T5000, T6, T6000 TSA TLA TVT,

Contains: UTV3000 headlight & our new housing



Work light sold separately

UTV300 (headlight)

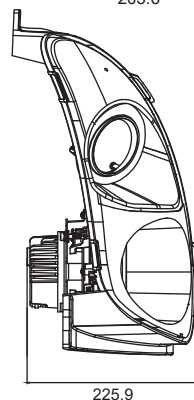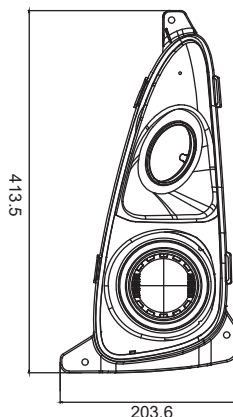

JOHN DEERE

UTV
products
LED LIGHTING

John Deere R Series and M Series

UTV358

60W, 4800LM Flush
Fit LED Work Light



UTV359

60W, 4800LM
LED Work Light



EMC CISPR25 Class 4
Voltage 9 - 32V
360 degree swivel mount on UTV359
Direct Plug-and-play
Overheat protection
Reverse polarity protected
IP68 waterproof



UTV356 60W High Beam

Lumens: 4500LM
Voltage: 9 - 32V
Waterproof and dustproof: IP68
EMC CISPR 25 Class 4




UTV355 30W Low Beam

Lumens: 2250LM
Voltage: 9 - 32V
Waterproof and dustproof: IP68
EMC CISPR 25 Class 4
UK, IE and NZ Road legal -
LHD version available upon request



UTV323 40W Work Light

Lumens: 3,200LM
Voltage: 9 - 32V
Waterproof and dustproof: IP68
EMC CISPR 25 Class 4
Plug-and-play



UTV613

Pole Mounted Amber Beacon
CANBUS Free
3 Flash patterns including rotating
Designed to operate with the CAN BUS on
but not limited to the following machines:
John Deere - R-Series



UTV337-2K

Low beam: 30W, 2,250lm
High beam: 50W, 3,750lm
DRL: 6W
Voltage: 9 - 32V DC

UTV330-5K

Lumens: 3,200LM
Voltage: 9 - 32V
Waterproof and dustproof
EMC CISPR 25 Class 4
Plug-and-play



UTV335K

Low beam: 30W, 2250LM
High beam: 50W, 3750LM

UTV346

Power: 4x10W Osram LED
Lumens: 3200LM

30 Series Premium Only

UK, IE and NZ Road legal -
LHD version available upon request

John Deere R Series, M Series and 30 Series

UTV344

(60W) 4800LM

UTV343

(80W) 6400LM



UTV354

(60W) 4800LM

UTV345

(80W) 6400LM

Voltage: 9 - 32V

EMC: CISPR 25 Class 4

Durable Polycarbonate Lens

Stainless steel hardware

UTV380K - 20 and 30Std Series

Low beam: 30W

High beam: 60W

DRL: 6W

Voltage: 9 - 32V

Waterproof and dustproof: IP68

UK, IE and NZ Road legal -

LHD version available upon request



UTV3003

40W, 3200LM LED

Made specifically for

6020/6030 Std



UTV326

Power: 4x10W CREE LED

Lumens: 3200LM

Voltage: 9 - 32V

Waterproof and dustproof




UTV379K - 00 and 10 Series

Low beam: 30W

High beam: 60W

DRL: 6W

Voltage: 9 - 32V



UTV379K

UTV3001

40W, 3200LM LED

Made specifically for 6000/6010 Series



UTV315: 40W, 3600LM

UTV312: 80W, 6400LM

Voltage: 9 - 32V - Waterproof and

dustproof: IP68 - Swivel mount -

Over/Under voltage protection -

EMC CISPR25 Class 4 - Durable

polycarbonate lens

Side and
centre mount



UTV318

Power: 4x5W CREE LED
Lumens: 3600 LM
Voltage: 9 - 32V
Waterproof and dustproof: IP68
EMC: ECE-R10
Durable polycarbonate lens
Dimensions: 138x62x38mm



UTV393K

Low beam: 30W 2250LM
High beam: 50W 3750LM
DRL: 6W
Voltage: 9 - 32V DC
*Surround not included



UK, IE and NZ
Road legal - LHD
version available
upon request

UTV303

18W, 1440LM LED
60° flood beam
Plug-and-play



Designed for 40,
50 and 55 series

UTV3029

130mm Headlight For John Deere M Series



Low beam: 30W, 2250 actual lumens
High beam: 50W, 3750 actual lumens
9W DRL
Voltage: 9-32V DC
EMC: CLSPR25 CLASS 4
Waterproof & Dustproof: IP69K

Designed for M series

UTV402-2

John Deere 20 & 30 Series
Square LED Front Side Light Kit
Dynamic Indicator
(Pair)

Kit includes:

- 1 x UTV402 Front Side Light (pair)
- 1 x UTV857 Mounting Brackets (pair)



UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

FENDT

UTV
products
LED LIGHTING

UTV3021

60W, 4,800LM

UTV3022

90W, 7,200LM

UTV3023

120W, 9,600LM



UTV3021: 60W, 4800LM

UTV3022: 90W, 7200LM

UTV3023: 120W, 9600LM

Voltage: 9-32V DC

Waterproof and dustproof: IP68

Die-cast aluminum housing

Durable polycarbonate lens

Over voltage protection

ECE-R10 approved

EMC CISPR 25 Class 4

UTV341

UTV341 - 80W

8x5W CREE, 3200LM

8x10W CREE, 6400LM

Voltage: 9-32V

Waterproof and dustproof: IP68

EMC: CISPR 25 Class 4

Over/Under voltage protection

Dimensions: 184x102x65mm



UTV350K Pair

Low beam: 30W 2400LM

High beam: 60W 4800LM

DRL: 12W

Voltage: 9-32V DC

Operation temperature:

-40°C to 85°C

Colour temperature: 6000K

Waterproof and dustproof: IP68

EMC: CISPR 25 Class 4

Durable polycarbonate lens

UTV3012

Power: 45W, 4000LM

Voltage: 9-32V

Built-in DT Connector

Swivel mounting bracket

Waterproof & dustproof: IP68

Die-cast aluminium housing

Durable polycarbonate lens



UTV344 (60W) 4800LM

UTV343 (80W) 6400LM

Voltage: 9-32V

Waterproof and dustproof: IP68

EMC: CISPR 25 Class 4

Over/Under voltage protection


Durable polycarbonate Class 4

Stainless steel hardware

Dimensions: 108x114x75mm



UTV392K



UTV394K

Low beam: 30W 2250LM

High beam: 50W 3750LM

DRL: 6W

Voltage: 9-32V DC

Operation temperature: -40°C to 85°C

Colour temperature: 6000K

Waterproof and dustproof: IP68

EMC: CISPR 25 Class 4

Die-cast aluminum housing

Durable polycarbonate lens

UK, IE and NZ Road legal -

LHD version available upon request

UTV3036

High beam: 60W, 9600 LM

Low beam: 30W, 4200 LM

Voltage: 9-32V DC

Connection: H4 Connector

IP Rating: IP68

Colour Temp: 5700 - 6000k

Die-cast Aluminium Housing

ECE-R10, EMC CISPR 25 Class 4, R112, R7



TRINITY WORK LIGHTS

DRL. STROBE. WORK LIGHT



UTV3022-1: 90W, 7200LM



UTV3022-2: 90W, 7200LM



UTV3022-1: 90W, 7200LM
LED Square Work Light

FUNCTIONS:

White DRL, Amber DRL, Amber strobe

Voltage: 9-32V DC

Waterproof and dustproof: IP68

Die-cast aluminium housing

Durable polycarbonate lens

Over voltage protection

ECE-R10 approved

EMC CISPR 25 Class 4



UTV3022-2: 90W, 7200LM
LED Square Work Light

FUNCTIONS:

Red Tail light, Amber DRL, Amber strobe

Voltage: 9-32V DC

Waterproof and dustproof: IP68

Die-cast aluminium housing

Durable polycarbonate lens

Over voltage protection

ECE-R10 approved

EMC CISPR 25 Class 4





UTV300-2K Bonnet Headlight Kit UTV300-3K Highlevel Headlight Kit UTV300-4K Bonnet and Highlevel Headlight Kit

Low beam: 30W 2100LM
High beam: 30W 2400LM
DRL: 12W
Voltage: 9-32V DC
Waterproof and dustproof: IP68
EMC: CISPR 25 Class 4
Durable polycarbonate lens
Over/Under voltage protection
Dimensions: 90x90x141mm

UK, IE and NZ Road legal - LHD version available upon request

UTV402-1K

Fendt Vario TMS Square
LED Front Side Light Kit
Dynamic Indicator
(Pair)



Kit includes:
1 x UTV402 Front Side Light (pair)
1 x UTV856 Mounting Brackets (pair)

UTV315: 40W, 3600LM

UTV312: 80W, 6400LM

Voltage: 9 - 32V
Waterproof and Dustproof: IP68
Swivel Mount
Over/Under voltage protection
EMC CISPR25 Class 4
Durable polycarbonate lens
Dimensions: 151x92x79mm

*For Vario TMS models UTV833 is required.



Side and centre mount

UTV3044

40W LED corner work light
40W, 3200 actual Lumens
Plug-and-play
Zero radio interference
Maintains OEM appearance

Suitable for:
Fendt 900 Series Vario
TMS 916, 920, 924, 926, 930



UTV325 60W Flood

UTV324 60W Spot

Lumens: 3200LM/4800LM/4800LM
Voltage: 9-32V
Waterproof and dustproof: IP68
EMC CISPR 25 Class 4
Over/Under voltage protection
Dimensions: 85x85x50mm

To suit top front cab



UTV321

Power: 4x10W CREE LED
Lumens: 3600LM
Voltage: 9-32V
Waterproof and dustproof: IP68
Over/Under voltage protection
Die-cast aluminum housing
Durable polycarbonate lens
60°c flood beam

UTV386K

LED headlight kit
14000 actual lumen as a pair
Plug-and-play
Zero radio interference
Maintains OEM appearance
*Suitable for Fendt 900 series TMS
UK, IE and NZ Road legal -
LHD version available upon request



To suit bonnet row finder light

UTV325 60W Flood

UTV324 60W Spot

Lumens: 4800LM

Voltage: 9-32V

Waterproof and dustproof: IP68

Durable polycarbonate lens

Stainless steel hardware

EMC: CISPR 25 Class 4

Over/Under voltage protection



UK, IE and NZ Road legal -
LHD version available upon request

UTV305: 40W, 3600LM

UTV306: 80W, 6400LM

Voltage: 9 - 32V DC

Swivel mount

Waterproof and Dustproof: IP68

EMC: CISPR 25 Class 4

Durable polycarbonate lens

Stainless steel hardware

Over/Under voltage protection

Dimensions: 142x60x126mm



Side and centre mount

UTV327

Power: 6x10W 60W

Lumens: 4800LM

Voltage: 9 - 36V

Swivel mounting bracket

Waterproof and dustproof: IP68

EMC CISPR25 Class 4

Durable polycarbonate lens

Over/Under voltage protection



UTV330-1K

Massey Ferguson
6600/7600/6700/
7700/6700S/7700S
/6S/7S

UTV330-2K

Massey Ferguson
5600/5700/5700SL

UTV330-3K

Massey Ferguson 5S

UTV330-4K

Massey Ferguson 8S



Low beam: 30W, 2100LM
High beam: 60W, 4200LM
DRL: 6W
Voltage: 9 - 32V DC

UTV520

Massey Ferguson
round LED tail light
with load resistor

Functions:

Side light,
indicator and brake



UTV300-5K - Suitable for tractors with
a separate main beam

UTV300 - Suitable for tractors with
combined high and low beam

UTV300-5K

UTV300

Low beam: 30W 2100LM

High beam: 30W 2400LM

DRL: 12W

Voltage: 9-32V DC

Waterproof and dustproof: IP68

EMC: CISPR 25 Class 4

Durable polycarbonate lens

Over/Under voltage protection

Dimensions: 90x90x141mm

UTV402-3

Massey 54/64/74 & 8400 Series

UTV402-4

Massey 61/62/81/8200 Series



Square LED Front
Side Light Kit
Dynamic Indicator
(Pair)



UTV336

Low beam: 30W, 2250LM
 High beam: 50W 3750LM
 DRL: 6W
 Voltage: 9 - 32V DC
 Colour temperature: 6000K
 Waterproof and dustproof: IP68
 EMC: CISPR 25 Class 4
 Die-cast aluminum housing
 Durable polycarbonate lens
 UK, IE and NZ Road legal -
 LHD version available upon request

UTV395

Massey Ferguson 200 & 600 Series
 Headlight
 Low beam: 30W, 2250 Lumen
 High beam: 50W, 3750 Lumen
 EMC: CISPR25 Class 4
 Voltage: 9-32V DC
 3 Tab OEM fixing point
 RHD approvals R112, R7



Side
 and
 centre
 mount



UTV315: 40W, 3600LM UTV312: 80W, 6400LM

Voltage: 9 - 32V
 Waterproof and Dustproof: IP68
 Swivel Mount
 Over/Under voltage protection
 EMC CISPR25 Class 4
 Durable polycarbonate lens
 Dimensions: 151x92x79mm

UTV371K - 300, 3000, 3100 and 3600 Series UTV372K - 4200, 4300, 6200 and 8200 Series UTV373K - 6100 and 8100 Series

Low beam: 30W
 High beam: 60W
 DRL: 6W
 Voltage: 9 - 32V
 Waterproof and dustproof: IP68
 Stainless steel hardware
 Over/Under voltage protection
 UK, IE and NZ Road legal -
 LHD version available upon request



UTV341

UTV341 - 80W

8x5W CREE, 3200LM
 8x10W CREE, 6400LM
 Voltage: 9-32V
 Waterproof and dustproof: IP68
 EMC: CISPR 25 Class 4
 Over/Under voltage protection
 Dimensions: 184x102x65mm

To
 suit
 top
 front
 cab



UTV342

40W, 3200LM
 Adjustable tilt
 Flood beam
 Voltage: 9-36V DC
 EMC to CISPR25 Class 4
 Overheat protection

UTV521

Massey Ferguson rectangular
 LED tail light with resistor
 Functions: Side light,
 indicator and brake light



UTV403 - 1

Side light suitable for Massey
 Ferguson
 Functions: Side light and
 indicator

UTV Products state actual lumen values whereas other manufacturers state raw
 lumen values which can never be achieved.

UTV377

Low beam: 30W, 2100LM
High beam: 60W, 4200LM
DRL: 12W, 800LM
Voltage: 9-32V
Waterproof and dustproof: IP68
EMC: CISPR 25 Class 4
Durable polycarbonate lens
Over/Under voltage protection
*For generation 1, 2 and 3 N and T Series



UK, IE and NZ Road legal - LHD version available upon request



UK, IE and NZ Road legal -
LHD version available upon request

UTV381K - 00 and 50 Series

Low beam: 30W
High beam: 60W
DRL: 6W
Voltage: 9 - 32V
Waterproof and dustproof: IP68
Stainless steel hardware
Over/Under voltage protection

UTV315: 40W, 3600LM

UTV312: 80W, 6400LM

Voltage: 9 - 32V
Waterproof and Dustproof: IP68
Swivel Mount
Over/Under voltage protection
EMC CISPR25 Class 4
Durable polycarbonate lens
Dimensions: 151x92x79mm



Side and centre mount



UTV3021

60W, 4,800LM

UTV3022

90W, 7,200LM

UTV3023

120W, 9,600LM



UTV3021: 60W, 4800LM
UTV3022: 90W, 7200LM
UTV3023: 120W, 9600LM
Voltage: 9-32V DC
Waterproof and dustproof: IP68
Die-cast aluminum housing
Durable polycarbonate lens
Over voltage protection
ECE-R10 approved
EMC CISPR 25 Class 4

UTV367

40W, 4x10W



UTV368

60W, 4x15W



UTV369

90W, 6x15W



Power: 3200LM/4800LM/7200LM
Voltage: 9 - 32V DC
Colour temperature: 6000K
Waterproof and dustproof: IP68
EMC CISPR25 Class 4
Swivel mounting bracket
Durable polycarbonate lens
Stainless steel hardware
Die-cast aluminum housing
E-mark: ECE-R10

UTV301

Power: 6x10W Osram LED
Lumens: 4800LM
Voltage: 9-32V
Waterproof and dustproof: IP68
EMC: CISPR 25 Class 4
Durable polycarbonate lens
Stainless steel hardware
Over/Under voltage protection
Dimensions: 100x117x77mm



UK, IE and NZ
Road legal -
LHD
version
available
upon
request



UTV300

Low beam: 30W 2100LM
High beam: 30W 2400LM
DRL: 12W
Voltage: 9-32V
Waterproof and dustproof: IP68
EMC: CISPR 25 Class 4
Durable polycarbonate lens
Over/Under voltage protection
Dimensions: 90x90x141mm



Side light and indicator

UTV401

Power: 1W
Voltage: 9 -32V DC
Colour temperature:
white and amber
Waterproof and dustproof: IP68
Die-cast aluminum housing
Durable polycarbonate lens

UTV334K

Lights included: UTV324 (x2) and UTV334 (x2)
Power: 60W LED
Lumens: 4800LM
Voltage: 9-32V
Waterproof and dustproof: IP68
EMC: CISPR 25 Class 4
Over/Under voltage protection

UK, IE and NZ Road legal -
LHD version available upon request



UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

**UTV310**

Lumens: 3200LM
 Power: 4x10W Osram LED (40W)
 Voltage: 9 - 32V
 Waterproof and dustproof: IP68
 EMC CISPR 25 Class 4
 Durable polycarbonate lens
 Stainless steel hardware
 Over/Under voltage protection
 Dimensions: 85x85x50mm

*DT Connector

**UTV366**

Lumens: 3200LM
 Voltage: 9 - 32V
 Power: 8x5W CREE LED
 Waterproof and Dustproof: IP68
 EMC CISPR 25 Class 4
 Durable polycarbonate lens
 Stainless steel hardware
 Over/Under voltage protection
 Dimensions: 152x72x61mm

UTV3012

Power: 45W, 4000LM
 Voltage: 9-32V
 Built-in DT Connector
 Swivel mounting bracket
 Waterproof & dustproof: IP68
 Die-cast aluminium housing
 Durable polycarbonate lens



Side and
 centre mount

**UTV315: 40W, 3600LM****UTV312: 80W, 6400LM**

Voltage: 9 - 32V
 Waterproof and Dustproof: IP68
 Swivel Mount
 Over/Under voltage protection
 EMC CISPR25 Class 4
 Durable polycarbonate lens
 Dimensions: 151x92x79mm



To suit top
 front cab

UTV341**UTV341 - 80W**

8x5W CREE, 3200LM
 8x10W CREE, 6400LM
 Voltage: 9-32V
 Waterproof and dustproof: IP68
 EMC: CISPR 25 Class 4
 Over/Under voltage protection
 Dimensions: 184x102x65mm

UTV3021

60W, 4,800LM

UTV3022

90W, 7,200LM

UTV3023

120W, 9,600LM



UTV3021: 60W, 4800LM

UTV3022: 90W, 7200LM

UTV3023: 120W, 9600LM

Voltage: 9-32V DC

Waterproof and dustproof: IP68

Die-cast aluminum housing

Durable polycarbonate lens

Over voltage protection

ECE-R10 approved

EMC CISPR 25 Class 4



Side and centre mount



UTV305: 40W, 3600LM

UTV306: 80W, 6400LM

Voltage: 9 - 32V DC
Swivel mount
Waterproof and Dustproof: IP68
EMC: CISPR 25 CLASS 4
Durable Class 4 polycarbonate lens
Stainless steel hardware
Dimensions: 142x60x126mm

UTV300

Low beam: 30W
High beam: 30W
Halo DRL: 12W
Voltage: 9 - 36V
Waterproof and Dustproof: IP68
EMC CISPR 25 CLASS 4
Durable Class 4 polycarbonate lens
Over/Under voltage protection
Dimensions: 90x90x141mm



UTV364

LED headlight has high and low beam with daytime running light (DRL) inbuilt
60W, 4800 lumen per light on full beam
30W, 2400 lumen on low beam
Bottom mounted
Plug-and-play
Zero radio interference
Maintains OEM appearance



UK, IE and NZ Road legal - LHD version available upon request



UTV3036

High beam: 60W, 9600 LM
Low beam: 30W, 4200 LM
Voltage: 9-32V DC
Connection: H4 Connector
IP Rating: IP68
Colour Temp: 5700 - 6000K
Die-cast Aluminium Housing
Approvals: ECE-R10, EMC
CISPR 25 Class 4, R112, R7



UTV370K

Low beam: 30W
High beam: 60W
DRL: 6W
Voltage: 9 - 32V
Waterproof and dustproof: IP68
Stainless steel hardware
Over/Under voltage protection

*Suitable for 56XL series & Steiger - Call for more information

UK, IE and NZ Road legal - LHD version available upon request



UTV350K Pair

Low beam: 30W 2400LM
High beam: 60W 4800LM
DRL: 12W
Voltage: 9-32V DC
Operation temperature: -40°C to 85°C
Colour temperature: 6000K
Waterproof and dustproof: IP68
EMC: CISPR 25 Class 4
Durable polycarbonate lens



UTV3044

40W LED corner work light
40W, 3200 actual Lumens
Plug-and-play
Zero radio interference
Maintains OEM appearance
Suitable for Case CS tractors



UTV325 60W Flood

Lumens: 3200LM
Voltage: 9-32V
Waterproof and dustproof: IP68
EMC CISPR 25 Class 4
Over/Under voltage protection
Dimensions: 85x85x50mm



UTV323

Lumens: 3200LM
Power: 4x10W CREE LED
Voltage: 9 - 32V
Waterproof and dustproof: IP68
EMC CISPR 25 Class 4
Durable polycarbonate lens
Stainless steel hardware
Over/Under voltage protection
Dimensions: 85x85x50mm



UTV3006

Case IH LED Headlight **5
& 4200 Series - Pair
Low beam: 30W
High beam: 60W
DRL: 6W
Voltage: 9 - 32V
IP68
Stainless steel hardware



UTV3007

Case IH LED Headlight MX
Series - Pair

Low beam: 30W
High beam: 60W
Voltage: 9 - 32V
IP68



UTV3008

Case IH Headlight JXU
& CVX Series - Pair

Low beam: 30W
High beam: 60W
Voltage: 9 - 32V
IP68
Stainless steel hardware
Over/under voltage protection



UTV3020

Case Puma LWB Headlight Kit - Pair
Low beam: 30W, 2250 actual lumens
High beam: 50W, 3750 actual lumens
EMC: CLSPR25 CLASS 4
Waterproof & Dustproof: IP69K

*This is an insert for the
original lights



UTV3026

Case Magnum/Quadtrac Headlight Kit - Pair
Low beam: 2100 actual lumens
High beam: 2400 actual lumens
Halo DRL: 12W
Voltage: 9 - 32V DC
Waterproof and Dustproof: IP68
EMC CISPR25 Class 3
Durable polycarbonate lens
Overvoltage protect
Operation Temperature: -40° to +85°C



UTV325 60W Flood

UTV324 60W Spot/High beam

Lumens: 4800LM


Voltage: 9-32V

Waterproof and dustproof: IP68

EMC CISPR 25 Class 4

Over/Under voltage protection

Dimensions: 104x85x104mm



UK, IE and NZ Road legal -
LHD version available
upon request



This kit does not include
row finder lights

UTV300-6K

High and low beam

Low beam: 30W 2100LM

High beam: 30W 2400LM

DRL: 12W

Voltage: 9-32V DC

Waterproof and dustproof: IP68

EMC: CISPR 25 Class 4

Durable polycarbonate lens

Over/Under voltage protection

Dimensions: 90x90x141mm

UTV3012

Power: 45W, 4000LM

Voltage: 9-32V

Built-in DT Connector

Swivel mounting bracket

Waterproof & dustproof: IP68

Die-cast aluminium housing

Durable polycarbonate lens



Side and centre
mount

UTV3021

60W, 4,800LM

UTV3022

90W, 7,200LM

UTV3023

120W, 9,600LM



Voltage: 9-32V DC

Waterproof and dustproof

Die-cast aluminum housing

Durable polycarbonate lens

Over voltage protection

ECE-R10 approved

EMC CISPR 25 Class 4

UTV315: 40W, 3600LM

UTV312: 80W, 6400LM

Voltage: 9 - 32V

Waterproof and Dustproof: IP68

Swivel Mount

Over/Under voltage protection

EMC CISPR25 Class 4

Durable polycarbonate lens

Dimensions: 151x92x79mm



Side and centre
mount

UTV305: 40W, 3600LM

UTV306: 80W, 6400LM

Voltage: 9 - 32V DC

Swivel mount

Waterproof and Dustproof: IP68

EMC: CISPR 25 Class 4

Durable polycarbonate lens

Stainless steel hardware

Over/Under voltage protection

Dimensions: 142x60x126mm

UTV3032

Compact Square LED Work light

Power: 40W Osram LED

Lumens: 3200LM

Voltage: 9-36V

Deutsch DT connector & male
plug with cable included



UTV3033

Compact Square LED Work light

Power: 50W Osram LED

Lumens: 4000LM

Voltage: 9-36V

Deutsch DT connector in housing
Includes male DT plug with
short length cable



UTV330

Low beam: 30W, 2100LM

High beam: 60W, 4200LM

DRL: 12W

Voltage: 9-32V

Waterproof and dustproof: IP68

Durable polycarbonate lens

Colour temperature: 6000K

UK, IE and NZ Road legal -
LHD version available upon
request



UTV332

Low beam: 30W

High beam: 70W

DRL: 12W

Voltage: 9-32V

Waterproof and dustproof: IP68

EMC CISPR 25 CLASS 4

Durable polycarbonate lens

Stainless steel hardware

Over/Under voltage protection

Dimensions: 228x173x106mm



UK, IE and NZ Road legal -
LHD version available upon
request



UTV3005

Flush-fit

Voltage: 9 - 32V

Waterproof and Dustproof: IP68

Swivel Mount

Over/Under voltage protection

EMC CISPR25 Class 4

Durable polycarbonate lens

Dimensions: 151x92x79mm





UTV325 60W Flood UTV324 60W Spot/ High beam

Lumens: 4800LM
Voltage: 9-32V
Waterproof and dustproof: IP68
Durable polycarbonate lens
Stainless steel hardware
EMC: CISPR 25 Class 4
Over/Under voltage protection
Dimensions: 184x102x65mm

UTV305: 40W, 3600LM

UTV306: 80W, 6400LM


Voltage: 9 - 32V DC
Swivel mount
Waterproof and Dustproof: IP68
EMC: CISPR 25 Class 4
Durable polycarbonate lens
Stainless steel hardware
Over/Under voltage protection
Dimensions: 142x60x126mm



Side and centre
mount

UTV337-4K

Low beam: 30W, 2,250lm
High beam: 50W, 3,750lm
DRL: 6W
Voltage: 9 - 32V DC
Dimensions:
132mm (lens diameter)
140mm (light diameter)

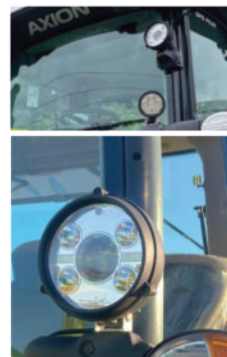

UTV367 40W, 4x10W



UTV368 60W, 4x15W

UTV369 90W, 6x15W



Power: 3200LM/4800LM/7200LM
Voltage: 9 - 32V DC
Colour temperature: 6000K
Waterproof and dustproof: IP68
EMC CISPR25 Class 4
Swivel mounting bracket
Durable polycarbonate lens
Stainless steel hardware
Die-cast aluminum housing
E-mark: ECE-R10

UTV300-1K

High beam and low beam kit

Low beam: 30W 2100LM
High beam: 30W 2400LM
DRL: 12W
Voltage: 9-32V DC
Waterproof and dustproof: IP68
EMC: CISPR 25 Class 4
Durable polycarbonate lens
Over/Under voltage protection
Dimensions: 90x90x141mm

UK, IE and NZ Road legal -
LHD version available upon
request



UTV330

Low beam: 30W, 2100LM
High beam: 60W, 4200LM
DRL: 12W
Voltage: 9-32V
Waterproof and dustproof: IP68
Durable polycarbonate lens
Colour temperature: 6000K

UK, IE and NZ Road legal -
LHD version available upon
request



UTV311

Lumens: 3200LM
Power: 4x10W (40W)
Voltage: 9 - 32V
Waterproof and dustproof: IP68
EMC CISPR 25 Class 4
Durable polycarbonate lens
Stainless steel hardware
Over/Under voltage protection



*H9 Connector

UTV315: 40W, 3600LM

UTV312: 80W, 6400LM

Voltage: 9 - 32V
Waterproof and Dustproof: IP68
Swivel Mount
Over/Under voltage protection
EMC CISPR25 CLASS 4
Durable polycarbonate lens
Dimensions: 151x92x79mm



Side and
centre mount

UTV3005

Flush-fit
40W, 3200 actual lumens
Zero radio interference
Waterproof and dustproof: IP68
Colour Temperature: 6000K
EMC: CISPR 25 Class 4
Die-cast aluminium housing
Durable polycarbonate lens



UTV382K

LED Headlight Kit - pair
14000 actual lumens as a pair
Plug-and-play
OEM Appearance
Zero radio interference
Waterproof and dustproof: IP68
Colour Temperature: 6000K
EMC: CISPR 25 Class 4
Die-cast aluminium housing
Durable polycarbonate lens

Designed for Claas - Renault



UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

MERLO

UTV
products
LED LIGHTING

Headlight

Low beam: 30W, 2100LM

High beam: 60W 4200LM

DRL: 12W, 800LM

Voltage: 9 - 32V

Waterproof and dustproof: IP68

EMC CISPR 25 Class 4

Durable polycarbonate lens

Over/Under voltage protection

Stainless steel hardware

*Check tab arrangement



UTV362



UTV363



UTV311

Lumens: 3200LM

Power: 4x10W (40W)

Voltage: 9 - 32V

Waterproof and dustproof: IP68

EMC CISPR 25 Class 4

Durable polycarbonate lens

Stainless steel hardware

Over/Under voltage protection



*H9 Connector

UTV3032

Compact Square LED Work light

Power: 40W Osram LED

Lumens: 3200LM

Voltage: 9-36V

Deutsch DT connector & male plug with cable included



UTV3033

Compact Square LED Work light

Power: 50W Osram LED

Lumens: 4000LM

Voltage: 9-36V

Deutsch DT connector in housing
Includes male DT plug with short length cable



UTV3021

60W, 4,800LM

UTV3022

90W, 7,200LM

UTV3023

120W, 9,600LM



Voltage: 9-32V DC

Waterproof and dustproof

Die-cast aluminum housing

Durable polycarbonate lens

Over voltage protection

ECE-R10 approved

EMC CISPR 25 Class 4

UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

DEUTZ-FAHR, LAMBORGHINI AND SAME

products
UTV
LED LIGHTING


UTV321

Power: 4x10W CREE LED
Lumens: 3600LM
Voltage: 9-32V
Waterproof and dustproof: IP68
Over/Under voltage protection
Die-cast aluminum housing
Durable polycarbonate lens
60° flood beam



UTV337-5K

Low beam: 30W, 2,250lm
High beam: 50W, 3,750lm
DRL: 6W
Voltage: 9 - 32V DC
Dimensions:
132mm (lens diameter)
140mm (light diameter)



UTV315: 40W, 3600LM

UTV312: 80W, 6400LM

Voltage: 9 - 32V
Waterproof and Dustproof: IP68
Swivel Mount
Over/Under voltage protection
EMC CISPR25 Class 4
Durable polycarbonate lens
Dimensions: 151x92x79mm

Side and centre mount



*H9 Connector

UTV311

Lumens: 3200LM
Power: 4x10W (40W)
Voltage: 9 - 32V
Waterproof and dustproof: IP68
EMC CISPR 25 Class 4
Durable polycarbonate lens
Stainless steel hardware
Over/Under voltage protection

UTV301

Power: 6x10W Osram LED
Lumens: 4800LM
Voltage: 9-32V
Waterproof and dustproof: IP68
EMC: CISPR 25 Class 4
Durable polycarbonate lens
Stainless steel hardware
Over/Under voltage protection
Dimensions: 100x117x77mm



UTV378

Low beam: 30W, 2100LM/High beam: 60W 4200LM
DRL: 12W, 800LM
Voltage: 9 - 32V
Waterproof and dustproof: IP68
EMC CISPR 25 Class 4
Durable polycarbonate lens
Over/Under voltage protection

UK, IE and NZ Road legal -
LHD version available upon request

UTV367
40W, 4x10W



UTV368
60W, 4x15W



UTV369
90W, 6x15W



Power: 3200LM/4800LM/7200LM
Voltage: 9 - 32V DC
Colour temperature: 6000K
Waterproof and dustproof: IP68
EMC CISPR25 Class 4
Swivel mounting bracket
Durable polycarbonate lens
Stainless steel hardware
Die-cast aluminum housing
E-mark: ECE-R10



UTV3012

Power: 45W, 4000LM
Voltage: 9-32V
Built-in DT Connector
Swivel mounting bracket
Waterproof & dustproof: IP68
Die-cast aluminium housing
Durable polycarbonate lens

UTV388K

UK and IE Road legal (RHD) – LHD Versions Available on request
Meets the following approvals ECE-R149 (ECE-R112), ECE-R148 (ECE-R7) and ECE-R10
30W low beam & 60W high beam
6W Daytime Running Light
14000 actual Lumen as a pair
*Suitable for Lamborghini, Same and Hurlimann machines



UTV364

LED headlight has high and low beam with daytime running light (DRL) inbuilt
60W, 4800 lumen per light on full beam
30W, 2400 lumen on low beam
Bottom mounted
Plug-and-play
Zero radio interference
Maintains OEM appearance

UTV385K

UK and IE Road legal (RHD) – LHD Versions Available on request
Meets the following approvals ECE-R149 (ECE-R112), ECE-R148 (ECE-R7) and ECE-R10
30W low beam & 60W high beam
6W Daytime Running Light
14000 actual Lumen as a pair
*Suitable for Lamborghini Formula



UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

UNIVERSAL HEADLIGHTS


UTV
products
LED LIGHTING

UTV330

Low beam: 30W, 2100LM
High beam: 60W, 4200LM
DRL: 12W
Voltage: 9-32V
Waterproof and dustproof: IP68
Durable polycarbonate lens
Colour temperature: 6000K
Die-cast aluminum housing
Stainless steel hardware
Over voltage protection
4-pin DT connector
Operation temperature: -40°C to +60°C

Machine-specific kits:

- UTV330-1K for Massey Ferguson 6600/7600/7700/6700S/7700S/6S/7S
- UTV330-2K for Massey Ferguson 5600/5700/5700SL
- UTV330-3K for Massey Ferguson 55
- UTV330-4K for Massey Ferguson 85

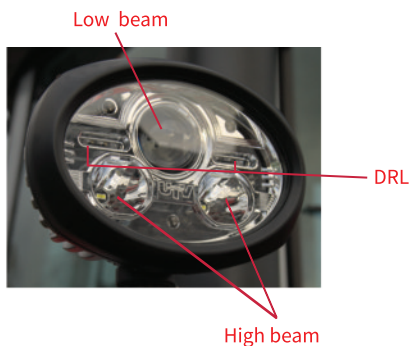

UK, IE and NZ
Road legal - LHD
version available
upon request



EMC CISPR 25 Class 4
Die-cast aluminum housing
Durable polycarbonate
Over voltage protection

UK, IE and NZ Road legal -
LHD version available
upon request

UTV364

Low beam: 30W, 2100LM
High beam: 60W, 4800LM
DRL: 12W
Voltage: 9-32V DC
Colour temperature: 6000K
Waterproof and dustproof: IP68



UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

UTV332

Features

Light functions as low beam, high beam,
turn signal and DRL
Multiple mounting applications
Designed for on-road and off-road vehicles

Specification

Low beam: 30W
High beam: 70W
DRL: 12W
Voltage: 9-32V
Waterproof and dustproof: IP68
EMC CISPR 25 Class 4
Durable polycarbonate lens
Stainless steel hardware
Over/Under voltage protection
Dimensions: 228x173x106mm

UK, IE and NZ Road legal -
LHD version available
upon request



Durable polycarbonate lens
Over/ Under voltage protection
Stainless steel hardware

UK, IE and NZ Road legal - LHD version available
upon request

UTV331

Low beam:30W
High beam: 60W
DRL: 24W
Voltage: 9-32V
Heated lens
Waterproof and dustproof: IP68
EMC CISPR25 Class 4



UNIVERSAL LIGHTS

UTV
products
LED LIGHTING

Voltage: 9 - 32V
Waterproof and dustproof: IP68
EMC CISPR25 Class 4
Durable polycarbonate lens
Stainless steel hardware
Over/Under voltage protection
Dimensions UTV302: 57x58x87mm
Dimensions UTV304: 155x53x58mm



UTV302
10W, 1x10W CREE LED
800LM



UTV304
16W, 16x1W Osram LED
1440LM

60° outward tilt angle
Voltage: 9 - 32V
Shock resistant to 20g
CE marked
Operating temperature: - 40°C to 85°C
Waterproof and dustproof: IP68
Durable polycarbonate lens
Over/Under voltage protection

Dimensions UTV420: 231x55x48mm
Dimensions UTV421: 312x55x48mm
Dimensions UTV422: 392x55x48mm

UTV420, UTV421 and UTV422 are also available in white. Product codes are as follows:

UTV420W
UTV421W
UTV 422W



UTV420
1600LM, 20W Osram



UTV421
2500LM, 32W Osram



UTV422
3680LM, 46W Osram

UTV252

Work Light with built-in white DRL light and strobe
24W, 1850 actual lumens
80-Degree spread
Stainless Steel bracket
Zero radio interference



UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.



UTV260K

Lights included: 2 x UTV3032
Power: 8x10W Osram LED
Lumens: 6400LM
Twin outlet Deutsch DT connector included


UTV261K

Lights included: 2 x UTV310
Power: 8x10 Osram LED
Lumens: 6400LM (pair)
Twin outlet Deutsch DT connector included



UTV3032

Compact Square LED Work light
Power: 40W
Lumens: 3200 actual lumens
Deutsch DT connector & male plug with cable included



UTV3033

Compact Square LED Work light
Power: 50W
Lumens: 4000 actual lumens
Deutsch DT connector in housing
Includes male DT plug with short length cable



UTV251

Power: 4pcs x 6W LMP LEDs
Lumens: 1850LM
80° flood beam
IP rating: IP68 and IP69K
Lexan polycarbonate lens
Stainless steel bracket
Dimensions: 155x74.8
(including bracket)x48mm

UTV310

Lumens: 3200LM
Power: 4x10W (40W)
Voltage: 9 - 32V
Waterproof and Dustproof: IP68
EMC CISPR 25 Class 4
Durable polycarbonate lens
Over/Under voltage protection



COLOURED LIGHTS



UTV902

1200mm (48") amber/white warning strip

UTV903


915mm (36") amber/white warning strip

UTV904

610mm (24") amber/white warning strip

UTV905

460mm (2x18") amber/white warning strip



UTV906

1200mm (48") tail light repeater

UTV907

1500mm (59") tail light repeater

UTV340

Power: 4x10W CREE Blue LED

Lumens: 2000LM

Voltage: 9-32V DC

Waterproof and d Class 4 IP68

EMC: CISPR 25 CLAAS 4

Durable polycarbonate lens

Over/Under voltage protection

Dimensions: 106x79x131mm




*Not suitable for use with pendamethaline or similar pre-emergence sprays

UTV3018

Glass Lens Blue Spot Light – Chemical Resistant

Illuminates every nozzle spray pattern across 24m, 36m or 40m boom width



Actual Lumens: 3400LM

Power: 45W

Voltage: 9-32V DC

IP Rating: IP68

Lens: Durable Glass

Rating: EMC CISPR 25 Class 4

Protection: Overvoltage

Suitable for: Crop sprayers, boom nozzle jets and poultry house loading shovels



UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.


 Amber/White
DRL

UTV282

Driving light with warning and park light
 Power: 7pcsx10W and 10pcsx6W LEDs
 Lumens: 10600LM
 Voltage: 9 - 36V DC
 IP rating: IP68 and IP69K
 EMC CISPR25 Class 4
 Durable polycarbonate lens
 Over/Under voltage protection
 Dimensions: 216Øx225x74.4mm

Low beam: 24W, 1530LM
 High beam: 38W, 3315LM
 9-36V DC
 IP rating: IP68 and IP69K
 Efficient polycarbonate lens
 H4 connector
 Colour temperature: 6500K
 Dimensions: 176 x 115.2mm



UK, IE and NZ Road legal -
 LHD version available
 upon request

UTV230

Black Chrome



UTV231

Chrome



UTV290

Black Chrome



UTV291

Chrome



Driving beam: 8500LM
 Amber DRL
 Stainless Steel Mounting Bracket
 Driving Beam+Park Light
 Side-Reflecting Optic System
 ECE R112 & R7& R10 Certified
 Over / Under Voltage Protection
 Reverse Polarity Protection
 IP rating: IP68 and IP69K

UTV280

Black Chrome



UTV281

Chrome



Dual Technology Hybrid Driving Light and White/Amber DRL
 Power: 60W, 4800 Lumens
 9-36VDC
 Anti-rust/corrosion/freezing resistance
 Electronic thermal management (ETM)
 Over/under voltage protection
 UV resistant, shock resistant-15G
 Dimensions: 180mmØ x 190mm height x 67.5mm depth

UTV283

Nova X 9 Light Cannon
 Black Dual Lens Technology LED Spot Daytime
 Running light - Amber/White
 120W



LIGHTBARS



UTV246

96W 8075LM 20" (508mm) Slimline
Lightbar with Vertical DRL



UTV244

150W 12000LM 20" (508mm)
Straight Hybrid DRL Lightbar

UTV248

60W 10" (254mm) Lightbar with Side
Reflector Technology



UTV218

270W 30" (765mm) 20600 Lumen Twin Row LED Lightbar



UTV247

150W 12000LM 20" (514mm)
Lightbar With Strobe Function
and White DRL

UTV249

240W 18600LM 31"
(802mm) Lightbar
With Strobe Function
and White DRL



UTV210

196W 14800 LM 40" (1003mm) Curved Lightbar



UTV211

252W 18800LM 50" (1274mm) Curved Lightbar

TAIL LIGHTS



UTV505

Functions: Tail light, stop light,
reverse light and fog light
DC10-30V



UTV503-12

Functions: Indicator, tail light, brake light, fog light
DC12V
Packed as a pair

UTV503-24

Functions: Indicator, tail light, brake light, fog light
DC24V, CAN bus error free
Packed as a pair



UTV504-12

Functions: Dynamic indicator,
tail light, brake light, reverse light and fog light
CAN bus error free, 12V only



UTV506

Functions: Brake light, tail light, and dynamic indicator
DC10-30W



*Go to pg. 45 in this brochure to see our LUKA Essentials range for Tail Lights

UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

UTV507

Functions: Tail light, stop light, reverse light, and dynamic indicator
DC10-30V



UTV508

Functions: Tail light, stop light, reverse light, and dynamic indicator
DC10-30W



UTV509

Functions: Tail light, brake light, dynamic indicator and reflex reflector
250mm cable



UTV515

Functions: Tail Light, Stop light, and Indicator



UTV516

Functions: Tail Light, Stop light, and Indicator



UTV521

Functions: Marker light, turn signal light and brake light



UTV522RY

Functions: Tail Light, brake light, and Indicator



SAFETY WARNING LIGHTS



UTV410

Rectangular Straight Line
(BLUE) Safety Perimeter
Light

UTV411

Rectangular Straight Line
(RED) Safety Perimeter
Light



UTV412

Oval-shaped Light Straight Line
(BLUE) Safety Perimeter Light



UTV413

Oval-shaped Light Straight Line
(RED) Safety Perimeter Light



UTV414

Round Light Curved Line
(GREEN) Safety Perimeter
LED Light

UTV415

Round Light Curved Line
(BLUE) Safety Perimeter
LED Light



UTV416

Round Light Curved Line
(RED) Safety Perimeter
LED Light

UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

MARKER LIGHTS



UTV602

Button Marker – Black Bezel – Amber
High performance LED lenses and chips
IP67 RATED
Voltage: 10-30V, DC
Operating temp: -40° to 65°C
Zero radio interference
Dimensions: 30.3 x 22.3mm



UTV640

Red / Clear Marker Light
High performance LED lenses and chips
IP67 RATED
Voltage: 10-30V, DC
Operating temp: -40° to 65°C
Zero radio interference



UTV641

Red / Clear / Dynamic Indicator
Marker Light
High performance LED lenses
and chips
IP67 RATED
Voltage: 10-30V, DC
Operating temp: -40° to 65°C
Zero radio interference
Dimensions:



UTV646RY

Halo Red Strobe with Amber Marker Light
IP67 RATED
Voltage: 10-30V, DC
Operating temp: -40° to +60°C
Zero radio interference

MARKER LIGHTS



UTV646WY

Halo White Strobe with Amber Marker Light
IP67 RATED
Voltage: 10-30V, DC
Operating temp: -40° to +60°C
Zero radio interference



UTV646AY

Halo Amber Strobe with Amber Marker Light
IP67 RATED
Voltage: 10-30V, DC
Operating temp: -40° to +60°C
Zero radio interference



UTV656

LED Marker Light - Rectangular - White
Top mount bracket included
IP67 Rated
Voltage: 10-30V, DC
Operating temp: -40° to 60°C
Zero radio interference



UTV657

LED Marker Light - Rectangular - Amber
Top mount bracket included
IP67 Rated
Voltage: 10-30V, DC
Operating temp: -40° to 60°C
Zero radio interference



UTV658

LED Marker Light - Rectangular - Red
Top mount bracket included
IP67 Rated
Voltage: 10-30V, DC
Operating temp: -40° to 60°C
Zero radio interference



UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

BEACONS



UTV610

32W Pole Mounted
Beacon – Amber
Shallow Black Top
High Performance
IP67 RATED
10 Flash Patterns



UTV614

48W Flexible DIN
Pole Mounted
Beacon
High Performance
3W LED lenses and chips
IP66 RATED
3 Flash Patterns



UTV632

48W Magnetic Mount
Flashing Beacon
High Performance
IP66 RATED
3 Flashes Per Minute
DIN Plug On Coiled Cable



UTV620

36W Rechargeable
Magnetic Flashing
Beacon
High Performance
IP66 RATED
120 Flashes per Minute
USB Rechargeable
4 Hour Charge Time
8 Hour battery Life



UTV613

Pole Mounted Beacon
CANBUS Free
3 Flash patterns

Designed to Operate with
the CAN BUS on but not
limited to the following
machines:

- John Deere R-Series
- Fendt – S4, S5, Gen6 & Gen7
- Gen6 and Gen7 Fendt



UTV634

Single Bolt Mounted
Beacon - Green
Homologation EC R10
DC 12-24V
IP66 Rated



UTV633

DIN Pole Mounted
Beacon - Green
Homologation EC R10
DC 12-24V
IP66 Rated



UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

STROBES



UTV606 - 3 LED

UTV607 - 4 LED

UTV608 - 6 LED

Amber strobe

Peak power: 3W per LED

Voltage: 10-30V DC

Flash patterns: 19 modes

1.5 metre cable



UTV617

Directional amber
warning light

36W (12 pcs x 3W)

300mm cable



4 LED Surface Mount Strobe
1.5 metre cable

UTV670

Dual LED colours: Amber/White
12W (4pcs x 3W)

UTV672

Dual LED colours: Amber/Red
12W (4pcs x 3W)

UTV674

Dual LED colours: Blue/Red
12W (4pcs x 3W)

UTV676

LED colour: Blue
12W (4pcs x 3W)



6 LED Surface Mount Strobe
1.5 metre cable

UTV671

Dual LED colours: Amber/White
18W (6pcs x 3W)

UTV673

Dual LED colours: Amber/Red
18W (6pcs x 3W)

UTV675


Dual LED colours: Blue/Red
18W (6pcs x 3W)

UTV677

LED colour: Blue
18W (6pcs x 3W)

UTV Products state actual lumen values whereas other manufacturers state raw lumen values which can never be achieved.

WIRING LOOMS AND ACCESSORIES

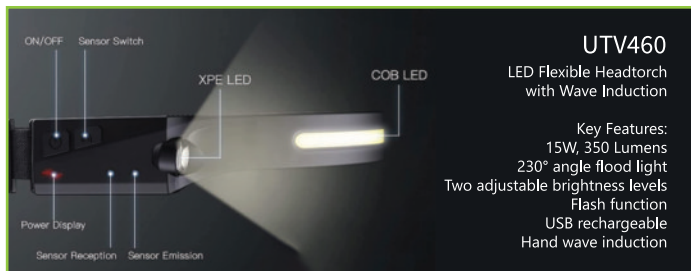

UTV460

LED Flexible Headtorch
with Wave Induction

Key Features:
15W, 350 Lumens
230° angle flood light
Two adjustable brightness levels
Flash function
USB rechargeable
Hand wave induction



UTV700

Power loom for 1 DT
connector with integrated
relay, fuse and switch



UTV707

Cigarette lighter plug to
Deutsch connector with switch
- 4 metres

UTV708

3 Pin D plug to Deutsch connector
with switch - metres

UTV450

Multi Function LED Torch



Key Features:
Compact LED handheld torch
Aluminium alloy housing
A quick flash and SOS flash
Zoom in & zoom out function



UTV704

Power loom dual DT
connector with integrated
relay, fuse and switch



UTV730

DT-2 connector
(pin) male



UTV731

DT-2 connector
(socket) female

UTV728

DT-2 connector
(socket) with
protective sleeve
female



UTV746

Bespoke front 6-pin connector
to DT-6 headlight connector



UTV778

Deutsch DT series
assorted connector kit



Crimping pliers available on
part number UTV550



UTV742

6 pin Deutsch connector male
with pins

Please visit our website to shop our full range of wiring looms, resistors and connectors.

SIDE LIGHTS & INDICATORS

UTV
products
LED LIGHTING



UTV401

Oval LED sidelight with indicator
Side mounted

Zero radio interference
Suitable for: Claas, John Deere,
Valtra, Massey Ferguson, Zetor,
Kubota

*Some machines may need load
resistors. Contact us to discuss



UTV405



Round LED Sidelight
with Indicator

UTV406



Round LED Indicator

UTV514

Square Front Sidelight
and indicator with
Reflector



UTV522WY

Classic Tractor Rectangular
LED sidelight and indicator
White/Amber



UTV402

Square LED Front Side Light
and Dynamic Indicator,
Reflective lens
(Pair)

UTV402-1K

Fendt Vario TMS Square
LED Front Side Light Kit
Dynamic Indicator
(Pair)

Kit includes:
1 x UTV402 Front Side Light (pair)
1 x UTV856 Mounting Brackets (pair)



UTV402-3 Massey 54/64/74 & 8400 Series
UTV402-4 Massey 61/62/81/8200 Series

Square LED Front Side Light Kit
Dynamic Indicator
(Pair)

UTV402-2

John Deere 20 & 30 Series
Square LED Front Side Light Kit
Dynamic Indicator
(Pair)

Kit includes:
1 x UTV402 Front Side Light (pair)
1 x UTV857 Mounting Brackets (pair)



UTV403

Oval Side Light - Rear mount
White side light, Indicator
(Pair)

Dimensions: 135 x 93mm
Voltage: 12V & 24V

UTV403-1

Oval Side Light Kit for Massey
66/76/67/7700 Series

UTV403-2

Oval Side Light Kit for John Deere R-
Series or 30 Series



UTV Products state actual lumen values whereas other manufacturers state raw
lumen values which can never be achieved.

YOUR DESIGN JOURNEY

Working with you every step of the way.

1. Consultation and Conceptualisation

We start with a detailed consultation to understand your needs and vision.

2. Detailed Design and Engineering

Our engineers can use CAD software to create precise models of required brackets and fixtures, ensuring every detail is meticulously planned.

3. Selecting the Right LEDs

We guide you in selecting the best LEDs for your lightbar, considering factors like power, colour temperature and flash patterns.

4. Fabrication and Finishing

Skilled craftsmen cut, bend and weld components as planned, before the bars are sent to be finished with a high-quality powder coat.

5. Delivery and Installation


We offer fitment at our workshop and trusted delivery postage options.

THE FINER DETAILS

Powder Coating

We understand the importance of high-quality fabrication and high-quality finishes. That is why we use a powder-coat finish in a range of colours for you to choose from, whether you want a safety-focused lightbar or prefer a more stealthy appearance. Powder coating provides a durable, attractive and even finish to your lightbar. This acts as a long-lasting, low maintenance, colourful covering for all types of steel fabrication work - perfect for machines that operate within harsh environments.

TOP PICKS

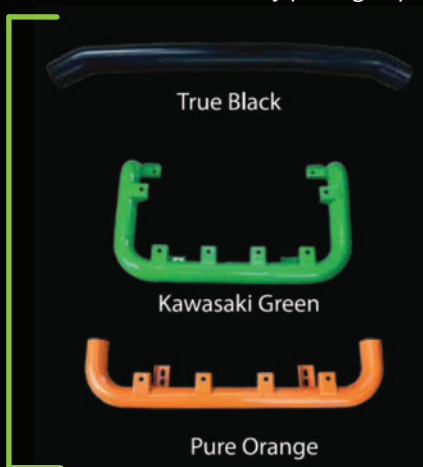

**UNLIMITED
POWDER
COAT
COLOUR
OPTIONS**

LUKA WORK & MARKER LIGHTS

LUKA Essentials is designed to deliver dependable, everyday lighting solutions with a focus on simplicity, practicality, and value. Built around four core principles: affordable, reliable, practical and efficient. The range offers a clean and accessible approach to modern lighting without compromising on performance. While not a direct replacement for our core UTV Products LED range, LUKA Essentials is offered as a more affordable alternative, providing reliable lighting solutions for a wide variety of applications. With a contemporary design style and subtle cues to brightness and LED technology, the range is easy to understand, easy to install, and built to perform. Honest, efficient, and straightforward, LUKA Essentials is quality lighting made simple.




LUKA261
Rectangular Work light Swivel
Base - Side and Centre Mount
Power: 40W (3000 Lumens)



LUKA204
Square LED Work light Swivel
Base - Side and Centre Mount
Power: 64W (5600 Lumens)




LUKA650
LED Marker Light - Oval
White
Reflector within the light
Zero Radio interference
Top Mount Bracket included

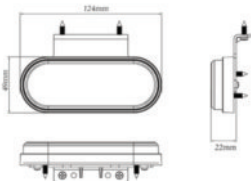


LUKA160
Oval LED Work Light Swivel
Base - Side and Centre Mount
Power: 30W (2500 Lumens)



LUKA651
LED Marker Light - Oval
Amber
Reflector within the light
Zero Radio interference
Top Mount Bracket included

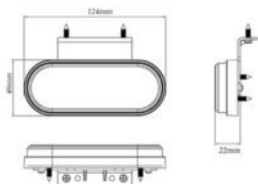

LUKA652
LED Marker Light - Oval
Red
Reflector within the light
Zero Radio interference
Top Mount Bracket included

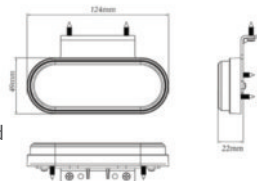

LUKA TAIL LIGHTS



LUKA502

6 functions: brake light, dynamic indicator, tail light, reverse light, rear fog light and reflector pair
10-30V DC
Bolt mounting - stainless steel bolts
IP67
Dimensions: 350x131x35mm



LUKA502

6 functions: brake light, dynamic indicator, tail light, reverse light, rear fog light and reflector pair
10-30V DC
Bolt mounting - stainless steel bolts
IP67

Dimensions: 350x131x35mm

4 x external super seal outputs for additional lights

LUKA510

3 functions: brake light, indicator and tail light
Stainless steel mounting
10-30V DC
Diameter: 140mm



LUKA511

4 functions: brake light, dynamic indicator, tail light and reverse light
10-30V
Stainless steel mounting
Diameter: 140mm



LUKA512

4 functions: brake light, dynamic indicator, tail light and number plate light
10-30V
Stainless steel mounting
Dimensions: 103x103mm

LUKA501




6 functions: brake light, dynamic indicator, tail light, reverse light, rear fog light and reflector
Dimensions: 350x131x35mm
Voltage: 10-30V
Stainless steel hardware
Waterproof: IP67
Durable polycarbonate lens



LUKA530

Wireless tail light - 3 functions: brake light, indicator and tail light - 10-30V DC - Stainless steel mounting - Dimensions: 103x103mm

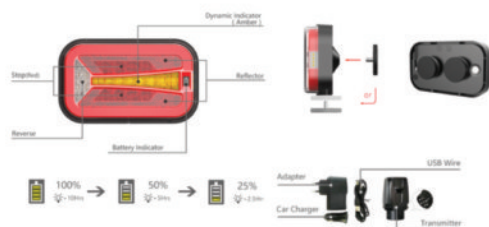

LUKA531

Wireless tail light - 5 functions: tail light, stop light, dynamic indicator, reverse and number plate light - 10-30V DC - Stainless steel mounting - Dimensions: 165x100mm

WHIP POLES



LUKA683


COB LED Marker Light Whip Pole - 2ft (pair)

LUKA684

COB LED Marker Light Whip Pole - 3ft (pair)

LUKA685

COB LED Marker Light Whip Pole - 4ft (pair)

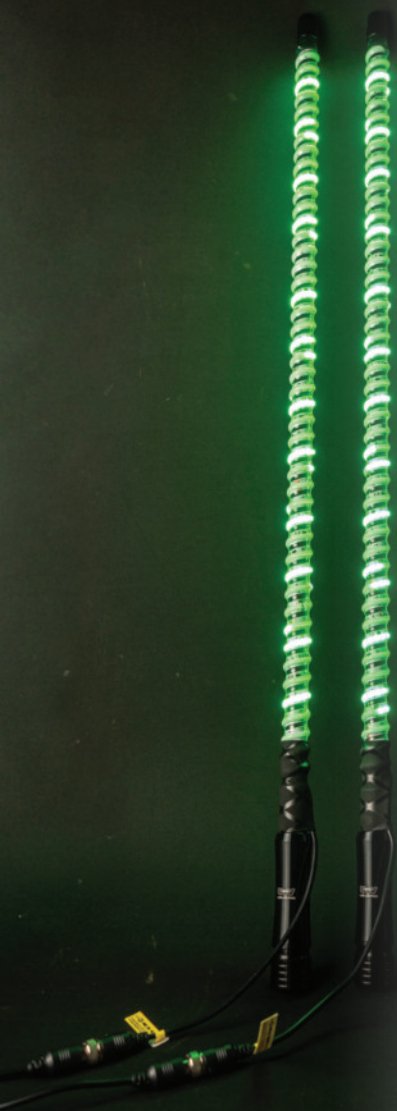

Multi-pattern

Indicator Function Built in


Brake Light Function Built in

Reverse Light Function built in

12V & 24V

Spring bases are sold separately - **UTV843**

NOTES

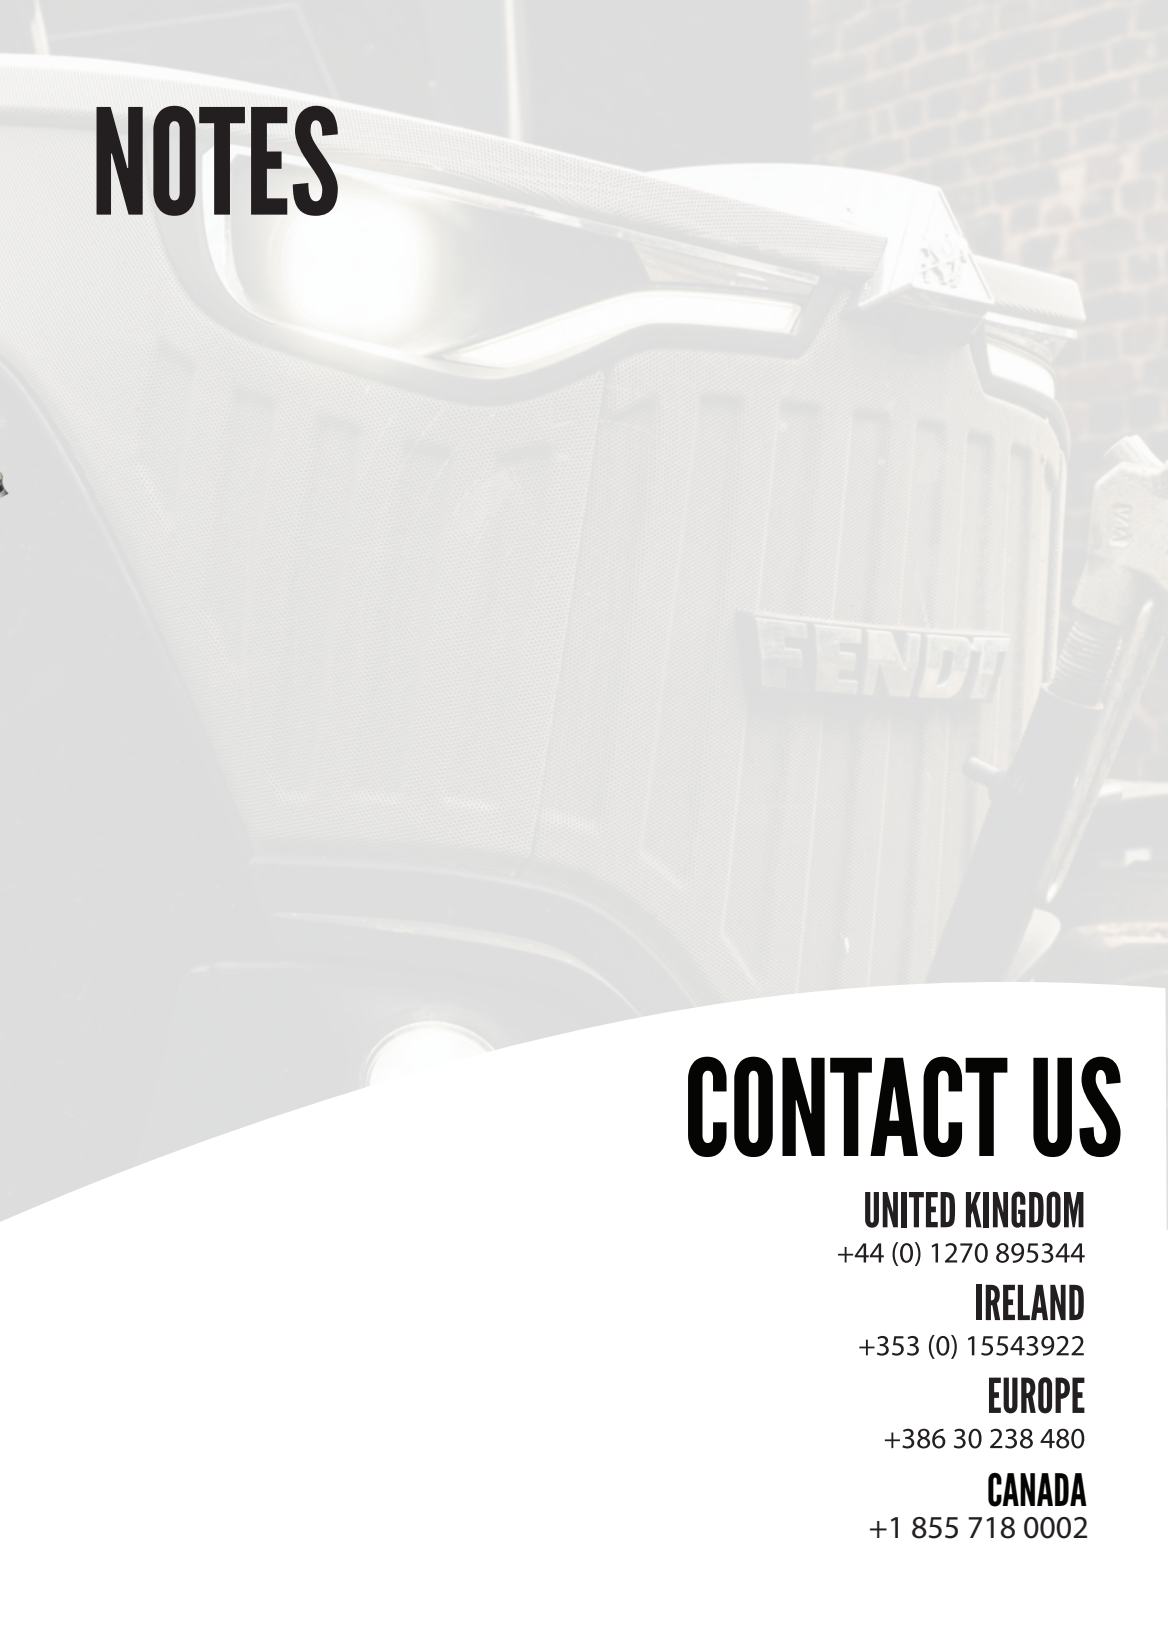A close-up, slightly faded image of the front grille of a white Fendt truck. The grille features vertical slats and a prominent 'FENDT' badge in the center. The truck's headlight is visible on the left side. The background shows a brick wall.

CONTACT US

UNITED KINGDOM

+44 (0) 1270 895344

IRELAND

+353 (0) 15543922

EUROPE

+386 30 238 480

CANADA

+1 855 718 0002



UTV
products
LED LIGHTING

ISSUE 7



UTV Products UK
sales@utvproducts.co.uk
www.utvproducts.co.uk

UTV Products Ireland
sales@utvproducts.ie
www.utvproducts.ie

UTV Products Europe
sales@utvproducts.eu
www.utvproducts.eu

UTV Products Canada
sales@utvproducts.ca
www.utvproducts.ca

UTV
products
LED LIGHTING