

NANO 35

Movable mast platform

PUSH AROUND



IMPORTANT TECHNICAL DATA:

Platform carrying capacity 200 kg 	Dimension length 1,205 m / width 0,76 m
Working height 5,46 m	Total weight 432 kg

IMPORTANT FEATURES

- The Nano 35 model is usually the first choice when a large working platform space is required on a small floor space.
- Low platform entrance height: only 390 mm.
- Contact area only 1.205 m x 0.76 m
- Optimal width fits through single door openings.
- Self-locking front wheels when raised.
- Large platform, 0.58m x 0.84m, gives the operator more room to work.


Application in construction: Ideal for finishing work, multiple floors comprehensive projects. Used by mechanics, electricians, ventilation installers, painters, for assembly, and much more.

Application in building technology: Cleaning, painting, decorating and general Schools, hospitals, maintenance work in trade and industry.



STANDARD SPECIFICATIONS

Technical data

Maximum working height	5,46 m
Maximum platform height	3,46 m
Platform height (Retracted)	0,36 m
Platform dimensions	0,58 m x 0,84 m
Platform carrying capacity	 200 kg
Overall length	1,205 m
Overall width	0,76 m
Overall height	1,95 m
Machine weight	432 kg

Lifting system

Electro-hydraulic pump unit	12 V DC
Maintenance-free AGM battery	
Battery charger	110 V - 230 V

Hydraulic system

Hydraulic system	
Electric (pump) motor	

Tires

Tires (abrasion-resistant)	200 x 50 mm
----------------------------	-------------

Brakes

Parking brake on guide rollers and self-locking front wheels when lifting.

STANDARD FEATURES

- Simple push button controls from ground and platform.
- Quality steel construction and dual mast with Ultra Glide technology.
- Durable powder coated finish.
- Fail safe hydraulic circuit.
- Self-locking front wheels, protect against shifting when raised.
- Emergency lowering from the ground.
- Hydraulic circuit with non-return valve on the lift cylinder.
- Acoustic signal when lifting and lowering.



NANO 35


Movable mast platform

PUSH AROUND




DIMENSIONS

All dimensions are guide values

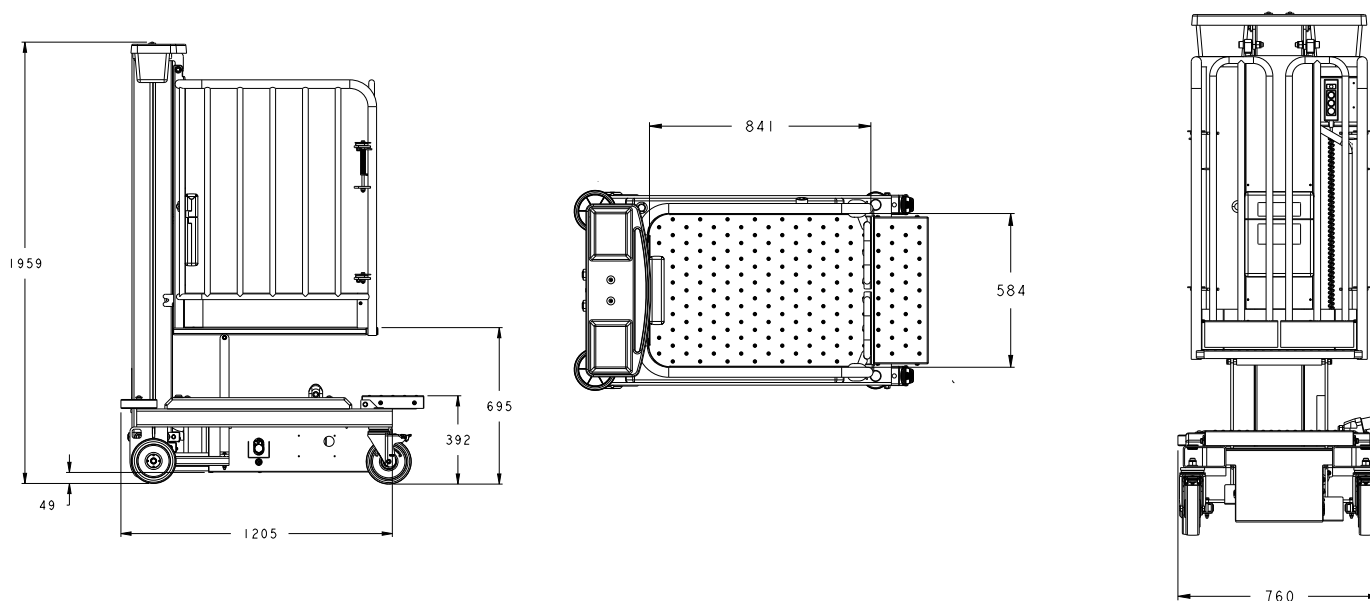

WORK DIAGRAM

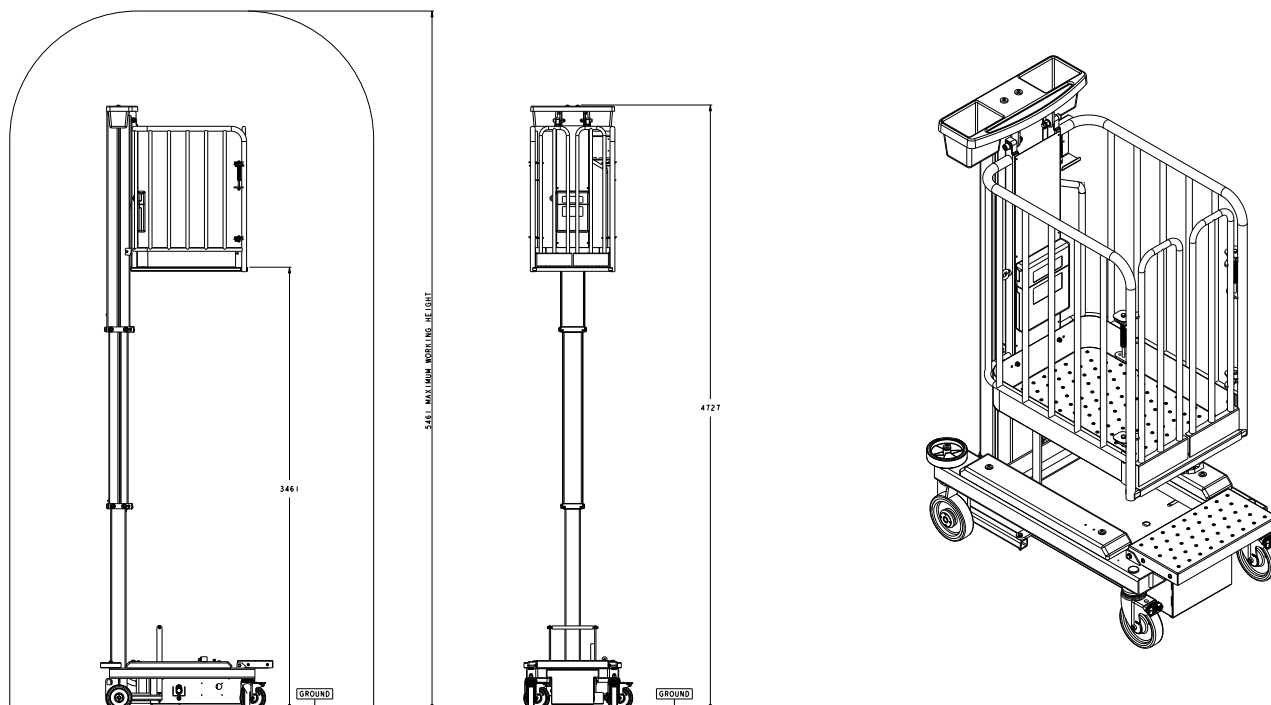

IMPORTANT

JLG continually conducts research and product development and reserves the right to make changes without prior notice. All data in this document is without commitment. Certain options or country-specific standards increase the stated weight. Specifications may vary to meet country-specific standards or by adding optional accessories.

Due to constant product improvement, JLG Industries reserves the right to make changes in specifications and/or equipment without prior notice.



JLG DEUTSCHLAND GMBH

Max-Planck-Straße 21
27721 Ritterhude/Ihlpohl (Bei Bremen)
Deutschland
Tel.: +49 (0) 421 693 500
www.jlg.com

A subsidiary of Oshkosh Corporation