



SMART DIAPHRAGM GAS METER

SMART DIAPHRAGM GAS METER

WT G4SG


- Compliance with European Standards EN1359 and OIML R137
- Compliance with Italian Standard UNI-TS 11291
- Integrated digital temperature sensor
- Integrated GPRS / GSM / SMS transmission module
- Remote Firmware Update
- Metrological unit battery life: >16 years
- Communication battery life: >8 years (GPRS)
- Installation in ATEX Zone 2 area
- Optical interface for configuration
- IP Rating: IP 55

PERFORMANCES ACCORDING TO MID 2014/32/EU


GAS METER MODEL	MAXIMUM CAPACITY Q_{max} (m^3/h)	2014 MINIMUM CAPACITY Q_{min} (m^3/h)	TRANSITIONAL RANGE Q_t (m^3/h)	CYCLIC VOLUME (dm^3)	MAXIMUM PRESSURE (bar)	TEMPERATURE RANGE ($^{\circ}C$)	AMBIENT TEMPERATURE ($^{\circ}C$)
G4SG	6	0,04	0,6	1,2	0,5	- 25 ÷ 55	- 25 ÷ 55

DIMENSIONAL FEATURES


A	(mm)	110
B	(mm)	224
C	(mm)	203
D	(mm)	168,5
E	(mm)	100

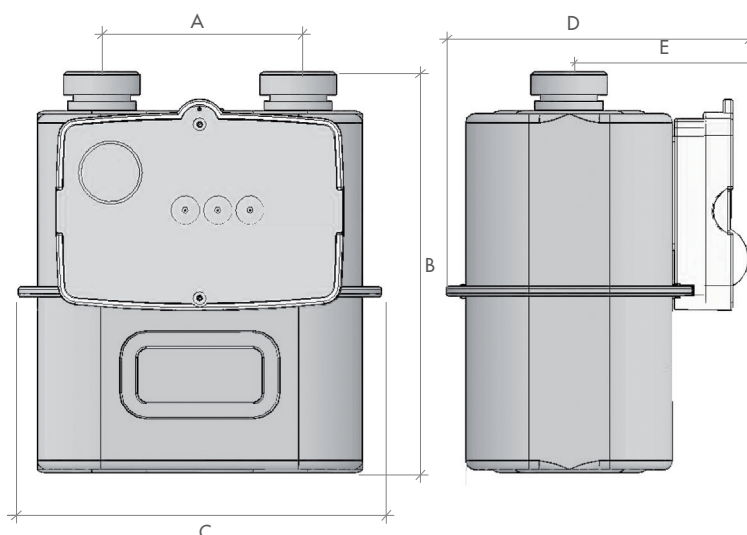

PRESSURE LOSS CURVE

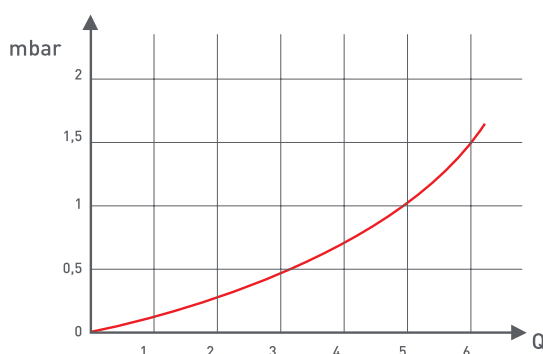

TYPICAL ERROR CURVE

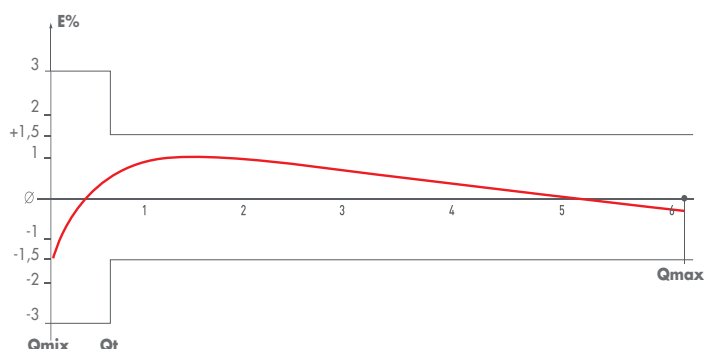

For more options or information, please contact us

metrixitalia

Metrix Italia s.r.l.
Via Nona Strada, 53 - 35129 Padova (Italy)
Tel: +39 049 5349377 - Fax: +39 049 8076008
www.metrixitalia.it - E-mail: info@metrixitalia.it