Milesight





Milesight | www.milesight.com

& 86-592-5085280

Sales Email: iot.sales@milesight.com

🗶 Building C09, Software Park Phase III, Xiamen 361024, Fujian, China

Make Sensing Matter



LoRaWAN[®] Product Catalogue Milesight IoT Product Brochure





About Milesight IoT

Milesight is a multi-dimensional sensing products company transforming how the world is perceived and connected, and delivering safety, efficiency, and business insights.

Our mission is to digitalize the world with connected sensors, deliver the most accurate and valuable data, and extract actionable insights with our partners. Together, we are driving real and positive impact for businesses.

Our vision is to continuously drive the society and environment towards a more connected, efficient, and sustainable future.


Milesight Milestone

Why Milesight

Why LoRaWAN[®]

LoRaWAN® is a long range, wide area, and low-power networking protocol.



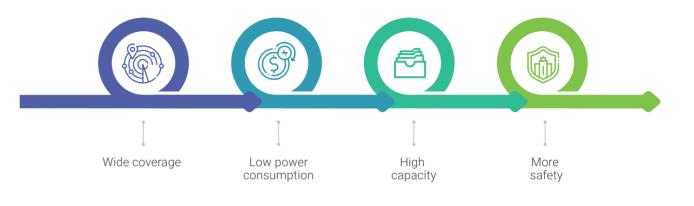

Why Milesight D2D





Milesight D2D is a device to device communications protocol which enables LoRaWAN[®] based devices to communicate directly with one another when they are in the same group.

- Low latency (less than 1 second in the same room)
- Low power for battery operation of both sides
- Long range and as secure as LoRaWAN[®]
- No useless beaconing and difficult synchronization
- Initial feature which coexists with LoRaWAN[®]
- No additional hardware and LoRaWAN[®] gateways are needed

Why 5G





5G's ultra high-speed, which is around 100 times faster than 4G, is designed to connect virtually everyone and everything together including machines, objects and devices.

How Can Milesight Empower Business and Industry?

According to the GSMA, 5G accounted for 8 percent of global mobile connections in 2021, with the share considerably lower in most parts of the world. People remain less convinced 5G will change how they connect to the internet and less likely to pay more for 5G connections. Against that backdrop, Milesight is committed to develop the most universal, pragmatic, and innovative products & solutions to those industries who need 4G to 5G migration solution, as well as boost the 5G adoption.


Accelerate the Fusion of 5G and AI to Help Industries Development

- Replace Expensive Wired Cable with Reliable 5G Connections
 - Reliable 5G Connections
- Lower Latency Enables Business Improvements





WHY Milesight? Because We Make Sensing Matter

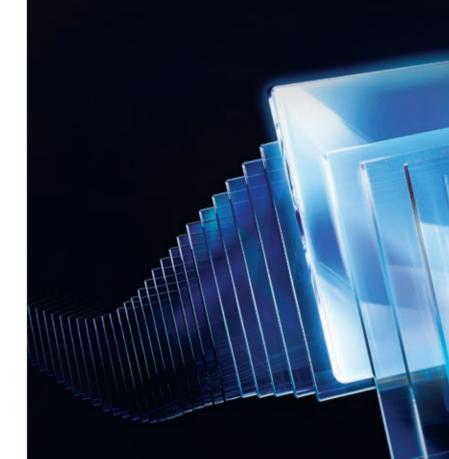

Capturing Meaningful **Data Matters**

ш

We provide multi-potential sensing products, focusing on the data that adds value, reflects patterns, and assists decision-making.

Responding to Customer **Demands Matters**

We adapt to evolving customer needs, creating products that are relevant to them and making a significant impact across varied applications, projects, and industries.






Thriving Together with **Partners Matters**

Alongside our expanding partner ecosystem, we develop comprehensive solutions, deliver value offerings, and accelerate results for customers.

Product Application Matrix

Pr

Smart Building

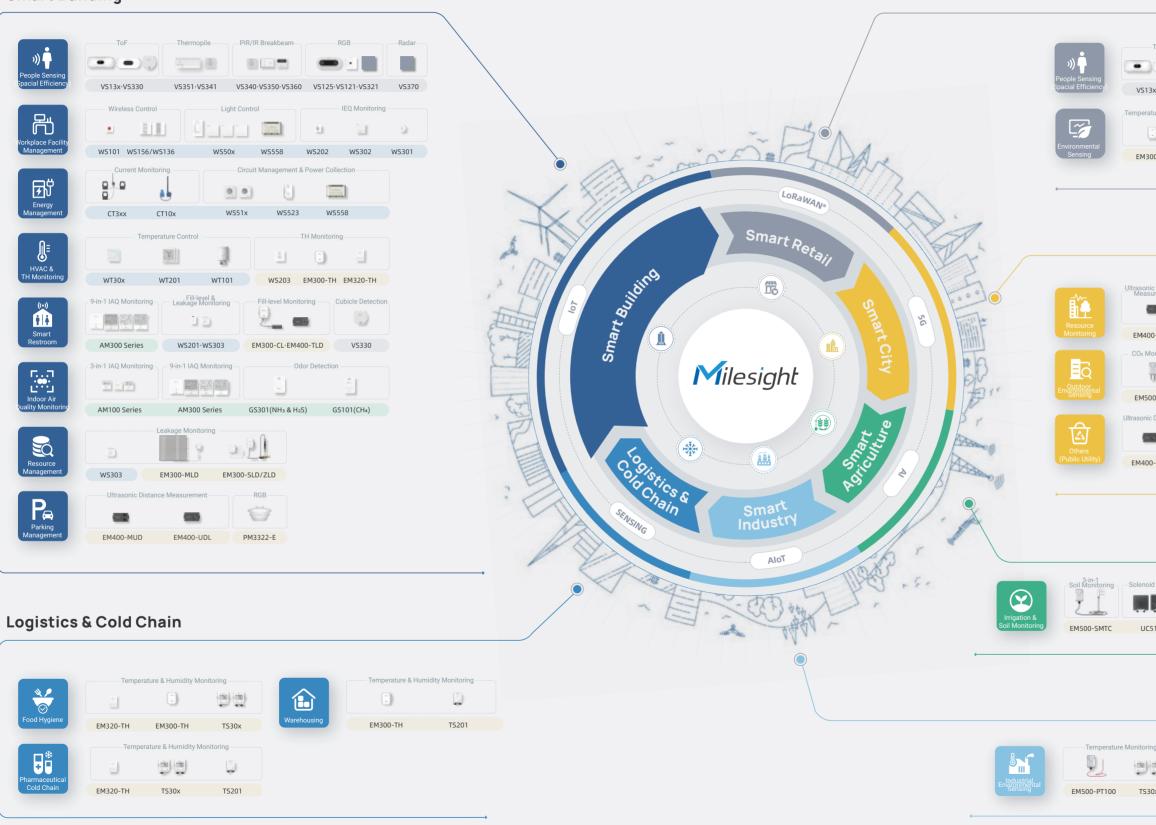

ro	duct Series	
	Occupancy & People Counting Series	EM Series
	WS & WT & CT Series	AM & GS Series

Smart Retail

ToF	Thermo	pile PIR/IR Break	kbeamR	B F	Radar	
		1				
3x&VS330	VS351&\	/S341 VS340&VS35	0&VS360 VS125&VS	121&VS321	/5370	
ture & Humidity Monitoring 3-in-1 IAQ Monitoring Odor Detection						
00-TH	EM320-TH	AM100 Series	AM300 Series	GS301(NH₃	& H2S)	

Smart City

Illumination Monitoring Water Level Monitoring Picture Capture Image: Second Secon						
Illumination Monitoring Water Level Monitoring Picture Capture Image: State Constraints Image: State Constraints Image: State Constraints Image: State Constraints Pulse Detection Pige Pressure Image: State Constraints Pulse Detection Pige Pressure Image: State Constraints Pulse Detection Pige Pressure Image: State Constraints Pilse Detection Pilse Detection	ic Distand urement	ToF Distant	e Detection	Tilt Monitoring	Magnetic Co	ntact
Ionitoring Illumination Monitoring Water Level Monitoring Picture Capture D0-CO2 EM500-LGT EM500-SWL EM410-RDL X5 D15tance Measurement Pulse Detection Pige Pressure Detection D1 D		9			25	
DO-CO2 EM500-LGT EM500-SWL EM410-RDL X5 Distance Measurement Pulse Detection Pige Pressure Detection Picture Capture Current Monitoring	0-MUD	EM40)-TLD	EM320-TILT	EM300-M	cs
Distance Measurement Pulse Detection Plant Pulse Detection Plant Pulse Detection Plant Plantt Plant Plantt Plantt	lonitoring	Illumination	Monitoring	Water Level N	Aonitoring	Picture Capture
Distance Measurement Pulse Detection Plan Plan	ŋ	2	2	21		
	00-CO2	EM50	D-LGT	EM500-SWL	EM410-RDL	X5
D-UDL EM500-UDL EM300-DI EM500-PP X1 CT3xx	c Distance	Measurement	Pulse Detection	Pipe Pressure Detection	Picture Capture	Current Monitoring
0-UDL EM500-UDL EM300-DI EM500-PP X1 CT3xx		1	(Q)	91		
	0-UDL	EM500-UDL	EM300-DI	EM500-PP	X1	СТЗхх

Smart Agriculture

id Valve	FQ Quitdoor	Illumination Detection . Monitoring	CO ₂ Monitoring	Weather Station
51x	Environmental	EM500-LGT	EM500-CO2	WT506

Smart Industry

3		Measurement Measurement	Magnetic Contact	
BOx	Facility Management	EM400-UDL EM500-UDL	EM300-MCS	UC50x

Enable All-around Connectivity

Milesight IoT Gateway

LoRa MAN° 🖷 BACnet 🔿 穼 Wi-Fi HaLow



HL31 Wi-Fi HaLow Gateway

- Support Wi-Fi HaLow AP mode to connect to Wi-Fi HaLow sensors

LoRaWAN[®] Gateway Overall Features

- Provide large capacity & Faster data processing
- Handle higher amount of traffic with lower consumption
- Handle massive sensor data efficiently
- OpenVPN/IPsec/PPTP/L2TP/GRE/DMVPN
- Embedded network server & High compatibility with mainstream networks including Actility and Senet
- Support CN470/RU864/IN865/EU868/AU915/ US915/KR920/AS923-1&2&3&4

- Connecting end nodes varies from Class A/B/C
- Extraordinary features: Noise analyzer, multicast, gateway fleet
- Embedded node-RED development tool (UG56/65/67)
- Embedded Python SDK (UG56/65/67)
- Listen before talk
- Support BACnet (UG56/65/67)

SG50 Ultra Low Power Solar LoRaWAN[®] Gateway

- Rated at IP67 and industrial design
- Built-in rechargeable batteries & Solar panel
- Support typical use for up to 4 days without sunlight
- Support cellular backhaul network



UG63 Mini LoRaWAN[®] Gateway

- Rated at IP30 and mini-sized
- Desktop, wall or ceiling mounting
- Backhaul backup: Ethernet and cellular

UG56 Industrial LoRaWAN[®] Gateway

- Rated at IP30 and industrial design
- Desktop and wall mounting
- 5V Type-C port or PoE
- Backhaul backup: Ethernet, cellular and Wi-Fi



UG65 Semi-Industrial LoRaWAN® Gateway

- Rated at IP65 and semi-industrial grade
- Desktop, wall or pole mounting
- 9-24 VDC Jack connector or PoE
- Backhaul backup: Ethernet, cellular and Wi-Fi

UG67 Outdoor LoRaWAN[®] Gateway

- Rated at IP67 and industrial design
- Wall or pole mounting
- DC, PoE or solar power supply (optional)
- Backhaul Backup: Ethernet, cellular and Wi-Fi
- Power outage alert
- GPS positioning



- Power supply via 5V type-C port, PoE or 5-12V DC by terminal block





See the Unseen to Know **Indoor Air Quality**

1260*

and 201

Minist

IAQ Sensor

LoRaWAN

2-in-1

2035832

Missight

568

28 60

WELL

Milesight

Æ

temperature

 $\hat{\mathbf{G}}^{\circ}$

humidity

- Traffic light indicator
- Anti-theft protection
- Battery life up to 7 years (AM102)/ 9 years (AM102L)

2035837

Merich

Cost-effective bulk deployment

Massight

3-in-1 AM103/AM103L



- Traffic light status indicator
- Anti-theft protection
- Smart screen mode
- Hibernation mode
- Support data storage and retransmission
- 2.13 -inch E-ink screen (AM103)
- Battery life up to 3 years (AM103) / 4 years (AM103L)

• Traffic light indicator & buzzer

- Higher accuracy & Smart screen mode
- Anti-theft protection
- Data retrieval and data retransmission
- 4.2-inch E-ink screen (AM307/AM308/AM319)
- Vivid emoticon indication (AM307/AM308/AM319)
- Powered via USB Type-C(AM319/AM319L)
- Battery life up to 3 years (AM307) / 1 year (AM308)
- Battery life up to 4 years (AM307L) / 1.5 year (AM308L)



Empowering Efficient Energy Management

CT Series

Local Rale AN°

Overall Features

- Self-powered operation
- Superior accuracy with up to 3.3kHz frequency
- Real-time accumulated ampere hour calculation

CT10x Smart Current Transformer



CT305 with 500A current capacity

- CT310 with 1000A current capacity
- Innovative one-to-three design

- Non-invasive installation
- Irregular current/temperature status alert
- LoRaWAN[®] wireless technology

- CT101 with 100A current capacity
- CT103 with 250A current capacity
- Detachable and cable-free design

CT3xx Smart Current Transformer



13 Milesight IoT Product Brochure

Smart People Counting That Matters in Buildings & Retails

Occupancy & People Counting Series

Space Occupancy

Space Occupancy Detection VS121 Al Workplace Occupancy Sensor

- Accuracy: Up to 99.5% *Will be influenced by outdoor sunlight *Not appropriate for some cubicles
- Technology: PIR, ToF
- Functionality: Bi-directional/Regional people counting, multi-zone occupancy detection
- Application: Workplace, cubicle

Wireless Cubicle Occupancy Detection VS330 Cubicle Occupancy Sensor

- Accuracy: Up to 99.8%
- Technology: Al, 2nd generation ToF
- Functionality: Bi-directional/Regional people counting, multi-zone occupancy detection
- · Application: Retail, building, airport, supermarket

Wireless Desk & Seat Occupancy Detection VS34x Desk 8 Seat Occupancy Sensor

- Accuracy: VS340: Up to 95% / VS341: Up to 98%
- Technology: VS340: PIR / VS341: PIR, Thermopile
- Functionality: Desk & Seat occupancy
- Application: Workstation



Indoor People Counting VS133 AI ToF People Counting Sensor

- Accuracy: Up to 99.8%
- dwell time detection

High-Ceiling Indoor and Semi-Outdoor People Counting VS135 Ultra ToF People Counter


- Accuracy: Up to 99.8%
- Technology: Al, 2nd generation ToF
- Functionality: Bi-directional/Regional people counting, dwell time detection
- · Application: Retail, building, airport, supermarket

Indoor People Counting

*Will be influenced by environmental temperature














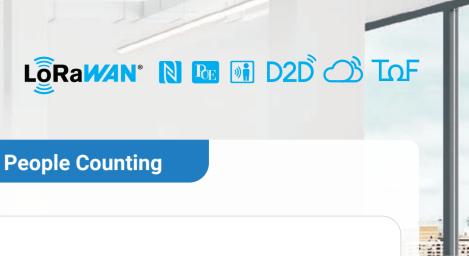

- Technology: Al, 2nd generation ToF
- Functionality: Bi-directional/Regional people counting,
- Application: Retail, building, airport, supermarket



VS125 AI Stereo Vision People Counter

• Accuracy: Up to 99.8%

- Technology: Al, binocular stereo vision
- Functionality: Bi-directional/Regional people counting, dwell time
- detection, gender and expression recognition
- Application: Retail, building, airport, supermarket



Wireless Indoor Passage People Counting VS350 Passage People Counter

- Accuracy: Multiple people: ~80%
- Technology: Dual PIR
- Functionality: Bi-directional people counting
- Application: Retail, workplace, restroom

Wireless Indoor Entrance People Counting VS351 Mini Al Thermopile People Counter

• Accuracy: Up to 99.8%

- Technology: Radar, thermopile
- Functionality: Bi-directional people counting
- Application: Meeting room



Indoor Semi-Open Area People Counting VS360 IR Breakbeam People Counter

- Accuracy: Multiple people: ~80%
- Technology: IR breakbeam
- Functionality: Bi-directional people counting
- Application: Open space people counting



Radar Technology



EM410-RDL Radar Distance Detector



- Radar technology
- Judge fall status
- Type-C/ PoE for frequent supervising
- Safety protection
- Healthcare centers

- Millimeter-wave radar technology
- Up to 20m detection range, 60GHz, 8°
- High dust protection level
- Battery-powered
- Sewer level detection

LoRaWAN[®] Fall Detector




Smart Heating and Cooling Controls

WT Series





....

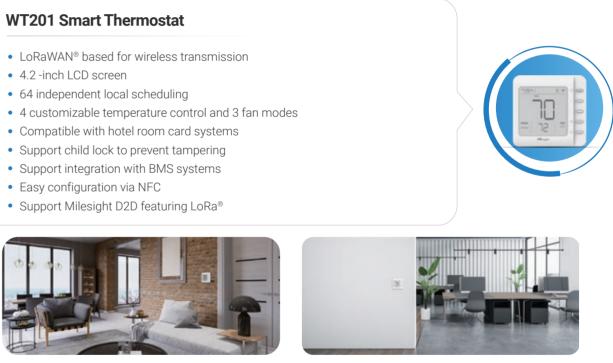

Modern Apartments



- 86mm hidden box and European 60mm round box available
- three-speed fan coil control • Support pre-set date period with programmable schedules

WT101 Smart Radiator Thermostat

+ * *

.........

- LoRaWAN[®] based for wireless transmission
- Accurate temperature detection and calibration
- Up to 16 heating plans within 1 pre-set date period
- Support child lock to prevent tampering
- Open window detection for smart management
- Fully compatible valve adapters out of the box
- Support integration with BMS systems
- Easy configuration via NFC
- Support freeze protection



Schools



Modern Buildings



Building

WT30x Smart Fan Coil Thermostat

- LoRaWAN[®] based for wireless transmission
- Applied in two pipes system, on/off relay or 0-10V valve control, and

Monitor Conditions and Optimize Controls

EM300 Series - Environment Monitoring Sensor

Overall Features

- Industrial-grade Design
- Support Extra Temperature and Humidity Detection (Except UDL&TILT&MLD)
- Rated at IP67

LogRal/AN°

- Battery Life up to 5 Years
- Easy Configuration via NFC



Smart Office

EM300-DI Pulse Counter

- Pulse/digital signals & temperature & humidity
- Great partner of old water meters
- IP67 rating for harsh environment
- Data retrieval and data retransmission



EM300-MCS Magnetic Contact Switch Sensor

- Detect the opening or closing event of door & window to ensure security
- Data retrieval and data retransmission

EM300-CL Capacitive Level Sensor

- Liquid level monitoring using non-contact capacitive sensing
- Reliable accuracy with strong anti-interference ability





EM300-TH Temperature & Humidity Sensor

- Temperature & humidity sensor
- Data retrieval and data retransmission

EM300-SLD/ZLD Leak Detection Sensor

- Detect water leakage based on the principle of liquid conduction (SLD: Spot leak detection, ZLD: Zone leak detection)
- LoRaWAN[®] certified (EM300-SLD)
- Data retrieval and data retransmission



EM300-MLD Membrane Leak Detection Sensor

EM310-TILT Tilt Sensor

- 3-Axis accelerometer & built-in zero adjustment
- 36 customized trigger rules & rated at IP67
- NFC configuration & easy installation

EM310-UDL Ultrasonic Distance/Level Sensor

- and short blind zone
- monitor device tilt status

6 EM320-TH Temperature & Humidity Sensor

- $\pm 0.2^{\circ}$ C high accuracy of temperature and $\pm 2\%$ RH of humidity
- Strong waterproof performance for harsh environments
- FDA-approved food contact material
- · Anti-theft and anti-slip pad design on back cover
- Data retrieval and data retransmission



EM320-TILT FDA Approved Tilt Sensor

- 3-Axis accelerometer & built-in zero adjustment
- 36 customized trigger rules & rated at IP67





• ±0.3°C high accuracy of temperature and ±3% RH of humidity



 Accurate conductive liquids' leakage detection in a large area • Support local data storage and data retransmission & retrievability



• Non-contact distance detection with 3-450 cm measurement range

• Detect device gesture with built-in 3-axis accelerometer sensor to



Revolutionizing Measurement and Monitoring

EM400 Series Distance/Level Measurement Sensor



Overall Features

- Rated at IP67
- LoRaWAN[®] & NB version
- Embedded 3-axis accelerometer & NTC thermistor
- Replaceable battery life up to 10 years
- Easy configuration via NFC





Smart Parking Lot



Boiler Expansion Monitoring



EM400-MUD Multifunctional Ultrasonic Distance Sensor

- Detection ranges from 3 cm to 450 cm
- Specialized in distance detection in trash bin and parking lot
- Pre-set modes: standard mode & bin mode
- Support pre-set parking lot mode (LoRaWAN[®] version only)
- Ultrasonic technology with small blind spots and support calibration

EM400-UDL Ultrasonic Distance Sensor

- Detection ranges from 25 cm to 1000 cm
- Professional for detecting water level in reservoir, industrial tank level and etc.
- Standard/professional versions available
- Support calibration for better accuracy



• ToF Technology for high accuracy and almost no blind spot





LORAMAN N C

Reliable Data Collection for Long-term Remote Operation

EM500 Series - Outdoor Environment Monitoring Sensor

Overall Features

- Rated at IP67
- Replaceable battery life up to 10 years
- Ultra-wide-distance transmission
- NFC configuration



All Hards waters the last dealers





EM500-CO₂ Carbon Dioxide Sensor (4 in 1)

- 4 in 1 (CO₂, temperature, humidity, barometric pressure)
- Measuring ranges (0 to 50°C): 400 ppm to 5000 ppm



- Accurate detection of any light changes
- Measuring ranges from 0 to 100, 000 lux with high precision



EM500-PP Pipe Pressure Sensor

- Shock & vibration & corrosion resistant
- Measuring accuracy around ±0.5% FS to prevent leakage danger
- Temperature compensation for correcting temperature changes



EM500-PT100 Industrial Temperature Sensor

- Customizable temperature (-200 ~ 800°C)
- Terminal heads are available varing from the straight tube, armored, SMT, threaded, magnet



EM500-UDL Ultrasonic Distance /Level Sensor

- Suitable for measuring benign & chemical mediums
- Non-contact detection for any corrosive liquid chemicals or combustibles
- Measurements in very small containers or openings
- Measuring ranges: 0.3-5 m/0.5-10 m



EM500-SMTC Soil Moisture, Temperature and Electrical Conductivity Sensor

- Research-grade accuracy in multiple soil media
- Corrosion resistance & tough probe
- Rapid monitoring of growing conditions



EM500-SWL Submersible Water Level Sensor

- Submersible pressure sensor not affected by foam, wind, or rain
- Measuring medium: water (Customizable for oil and other non-corrosive media)
- Customizable measuring range up to 200 m





WS101 Smart Button

- Support multiple press actions
- Convenient size
- Built-in LED indicator & buzzer
- Support Milesight D2D Featuring LoRa®
- Battery life over 5 years



WS201 Smart Fill Level Monitoring Sensor

- Detection ranges from 1 cm to 55 cm
- Suitable for diverse toilet paper dispenser
- Accurate fill level monitoring with ToF technology
- Battery life up to 2 years



WS156 & WS136 Smart Scene Panel

- 100% wire-free
- Customizable display (WS156)
- Customizable stickers (WS136)
- Battery life up to 3 years
- Support Milesight D2D Featuring LoRa®
- LoRaWAN® certified (WS156)



WS202 PIR & Light Sensor

- Occupancy or motion detection
- Convenient size
- Built-in light sensor & PIR sensor
- Support Milesight D2D Featuring LoRa®
- Battery life up to 4 years



WS203 Motion & TH Sensor

- Flexible motion detection
- Adjustable detection angles
- Battery life up to 5 years
- Built-in temperature and humidity sensor
- Support local data storage and data retransmission & retrievability
- Support Milesight D2D featuring LoRa®



WS302 Sound Level Sensor

- Peak and average sound level measurement
- Simple design for blending with any interiors
- NFC configuration & wire-free installation
- LED alarm indicator
- Battery life up to 4 years



WS50x Wall Switch

- Time-delay, schedule, remote and scene-based control
- 1/2-gang & multinational versions (AU, EU, UK & US)
- Power consumption statistics
- Multicast for remote control in bulk
- Support Milesight D2D Featuring LoRa®



- Remote & time-based ON/OFF
- Power consumption measurement and collection
- Overload protection/alarm
- Support multicast



WS301 Magnetic Contact Switch Sensor

- 100% wire-free
- Tamper detection
- Built-in LED indicator
- Battery life up to 5 years
- Support Milesight D2D Featuring LoRa®



WS303 Mini Leak Detection Sensor

- Water leak detection with 0.5 mm to trigger alert
- Immediate warning locally and remotely
- Battery life up to 5 years & IP67 rated
- Support Milesight D2D featuring LoRa®



WS51x Smart Wall Socket

- Easy remote and local control
- Customizable scheduling control
- Group control with multicast
- Support overload protection
- V-0 flame-retardant material
- Support Milesight D2D featuring LoRa®



WS558 Smart Light Controller

- Control up to 8 lighting circuits
- Remote & time-based ON/OFF
- Power consumption measurement
- Support Milesight D2D Featuring LoRa®

Sense the Invisible Danger

GS Series






GS101 LoRaWAN® Gas Detector

- Methane (CH₄) sensor
- Event trigger
- Built-in auto-test function
- Ultra safe gas alarm threshold
- 800 records historical data storing capacity
- 5-year long life expectancy

GS301 LoRaWAN® Bathroom Odor Detector

- Detect NH₃ & H₂S with high accuracy
- Traffic light indicator & buzzer
- Battery life up to 3 years
- Support Milesight D2D Featuring LoRa®





GS601 Vape Detector

- Vape detection
- Type-C for frequent supervising
- 70dBA buzzer and Multi-color indicator
- Anti-demolition & Warning

Integrate Connectivity and Applications in One

DS Series



• 4.2 E-ink screen

Miles

- Three pigment ink system: red/white/black
- Customized templates in multiple modules
- Support over 150 languages
- Battery life up to 5 years
- Open API & LoRaWAN® Button

Deployment with Ease

Milesight Accessories



UPS01 Uninterruptible Power Supply

- Capacity up to 12000mAh & IP67 rated
- Up to 32 hours' supplement
- Data protection & Plug and play





FT101 Milesight Field Tester

- Real-time network signal testing and analysis
- 5.72 inch full HD touch screen
- Full frequency band testing capability
- Records signal test results with GPS location
- Seamless report export and data analysis
- Long-lasting battery life



TS Series

TS101 Insertion Temperature Sensor

• ±0.5°C detection accuracy

- Food-grade enclosure and probe
- IP67 rated & IK10 rated (transceiver)
- Support data storage and retransmission
- Battery life up to 10 years

TS201 Cost-Effective Temperature Sensor

Milesight * I D A ES80" 26

Milesight

- LED light status indicator
- Rugged IP67 rating
- Up to 2,800 sets of data logging
- Comply with EN12830 standard
- Average battery life: 3 years

TS30x LoRaWAN[®] Temperature Sensor



- Rated at IP65
- Compliance with HACCP and 21 CFR Part 11B
- Optimized readability with LCD screen
- Efficient data export in PDF
- Support connection of PT100 temperature probe and door magnetic sensor

Accurate, Reliable and **Continuous Weather Monitoring**

WTS Series



Overall Features

- All-in-one IoT weather station
- Solar-powered & Chargeable batteries backup
- Robust and rugged
- Various application scenarios
- Data retrieval and data retransmission



WTS506 () **IoT Weather Station**

Protect and Manage Critical Assets at All Times

AT Series LogRal ON @ GNSS 🛜 🚯 Bluetooth

AT101 Outdoor Asset Tracker

- Highly-accurate GNSS positioning
- Support geofencing
- Provide motion/periodic/timing modes
- IP67 rated & IK09 rated














NTS506 only





iBox Kit Series

Milesight iBox Kit is designed for users to guickly evaluate the LoRaWAN® technology with testified devices and services. Going comprehensively digital transformation with more certainty, these solutions are the one step before users to scale connected device deployments securely with high reliability.

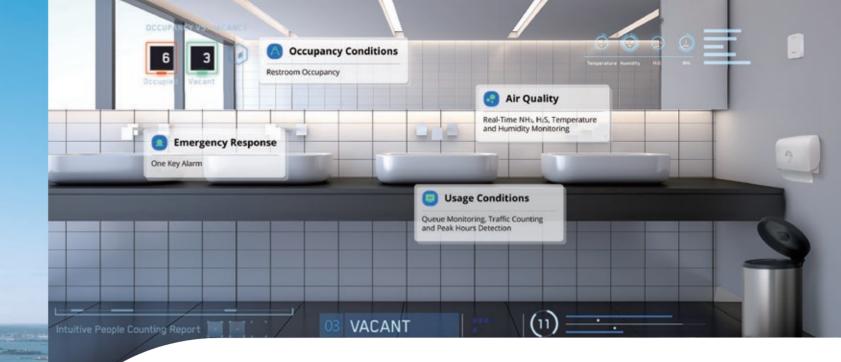

Overall Features

- Starters enjoy it for putting PoCs into action with reduced time & cost
- Operators need It for new projects and potential market demands
- Deployers love it for easy to deploy and integrate with multiple NS



platforms			
- WS301 - WS303 - UC300			
ht IoT Cloud		IBox	
ree cloud services ecified period of	interio	B (1)	٠



iBox Smart Building Kit



Smart Restroom Solution

Reshape Restroom, Release the Values of Smartness

Milesight Smart Restroom Solution seamlessly integrates advanced operational and environmental sensors and IoT technologies breaking the limitations of traditional restrooms.



- Effective toilet paper replacement with fill level monitoring
- Advanced HVAC systems based on H_2S and NH_3 detection data
- Detect leaks immediately with leak detection and take Occupancy mastery based on cubicles vacancy data countermeasures

- Integrated information displayed for users can have a visual vew of the restroom conditions
- Metering management in real time to improve energy utilization and energy saving

Sensing to Get Advanced Imaging Insights

Milesight X Infinity Series

4G VI-Fi Halow

X1 Sensing Camera for Indoor Scenarios

- Inspire sensing insights through images
- 2MP high-definition images
- Easy-to-get wireless deployment
- Low power consumption
- Multi-object catching
- Multi-capturing modes
- Compact design
- Powerful camera capacity
- Collaborate with AloT Sensing Platform
- Compatible with third-party platforms
- Battery life up to 2 years
- Wi-Fi HaLow version available


X5 Sensing Camera for Outdoor Applications

- 4G transmission
- Wi-Fi configuration
- Active based on time, DI, PIR, radar, temperature or noise
- IP66 rated & Adjustable rain cover
- Support GPS
- 2MP high-definition images
- Support infrared supplement light without disturbance
- Wireless deployment
- Power supply via type-c and solar power
- Support hibernate mode
- Collaborate with AloT Sensing Platform
- Compatible with third-party platforms



Milesight AloT Sensing Platform

The AIoT sensing platform aims to form a data group of each sensing object including all aspects for further analysis to avoid the incomplete, unreliable problem because of scattered data.



Device Management

- Add sensing devices & Check the latest device telemetry data
- Customized ROI realizing image subdivision
- Recognize the image information of meters and digital display instrument, define Al recognition values

🖂 Sensing Objects

- Build a sensing object from different Telemetry data of different devices
- Search historical data of sensing objects

Trigger

- Low battery and inactive status trigger alarm push
- Multiple HTTP and MQTT receivers can be set





Third Party Platform



Dashboard

- Real-time update of images captured by sensing cameras
- Statistics on inactive and active device status
- Device exception alarm (low battery or inactive status)



- Normalize all data of the sensing object
- Support data output to third-party platforms for secondary applications



- Batch hardware updating
- Configuration files batch importing

Ultra-Fast and Futuristic

5G Series

Rugged Communications for Mission -Critical Applications

Industrial Cellular Router & Switch



UR32L Industrial Cellular Router

- High cost-effective with main router function
- 2 x 10/100 Mbps Ethernet interfaces for reliable network
- Support global 4G LTE network



UR35 Industrial Cellular Router

- Rich interfaces
- 4 x PoE PSE Ethernet ports
 1 x RS232, 1 x RS485, 1 x DI, 1 x DO
 Wi-Fi & GPS
- ④ FXS port for telephone communication
- Wide input voltage
- Support secondary development with Python SDK & API
- Industrial-grade design



UF51 5G CPE

- Flexible deployment
- Dual band Wi-Fi
- Outstanding performance
- Flexible installation
- Multiple industrial interfaces
- PoE PD powered

UF31 5G Dongle

- Plug & play dongle for 5G connectivity
- SA/NSA & super-fast
 5G speed
- Palm-sized design for any limited space
- Accelerator of 5G embedded applications



- Fast speed 4G/5G network
- Wi-Fi 6

- Rich interfaces
- ① Gigabit Ethernet ports for lightning transmission of data
- ② 1 x RS232, 1 x RS485, 1 x DI, 1 x DO
- ③ 4 x Wi-Fi, 4 x cellular, 1 x GPS
- ④ 1 x USB port
- Industrial-grade design







UR32 Industrial Cellular Router

- Rich interfaces
 ① Wi-Fi/GPS (alternative)
 ② PoE (optional)
 ③ 2 x Ethernet ports, 1 x RS232, 1 x DI, 1 x DO
- Support secondary development with Python SDK & API
- Industrial-grade design
- Verizon Open Development Certification

UR41 Mini Industrial Router

- Itsy-bitsy router with great flexibility
- Rich interfaces ① GNSS
- ② 1 x RS232/RS485, 1 x DI, 1 x DO
- ③ 1 x Ethernet port
- Ultra-low power consumption
- Industrial-grade design

PoE Switch

- Multiple-port options: 4, 8, 16, 24
- Smart PoE power supply
- Superb transmission
- Flexible extend mode
- SFP uplink port
- Surge protection

Bring Data Acquisition & Remote Control with Ease

IoT Controller

Remote Management Platform





- Large scale deployment Real-time monitoring Comprehensive report

Milesight VPN

Milesight VPN is a web-based VPN monitoring and management platform.

- Intuitive Web GUI
- Connection status overview
- Easy to setup VPN tunnel
- Access to remote devices securely
- Support up to 1000+ connected devices

UC100 IoT Controller

Muge

- RS485 to LoRaWAN[®] transmission
- Cost-effective & super-tiny size
- Support Milesight D2D Featuring LoRa[®]



UC50x Series LoRaWAN[®] Controller

- Rich industrial interfaces: RS232/RS485(Switchable), GPIO, analog input and SDI-12
- Waterproof design including IP67 case and M12 connectors
- DC powered and built-in battery (optional)
- Solar powered (UC501)
- NFC or wired USB port for configuring
- Battery life up to 10 years
- Support internal antenna or external antenna version
- Multicast function and over threshold reporting are available
- Support local data storage (600 pieces), retrievability and retransmission

UC300 IoT Controller

- Backhaul connectivity: LoRaWAN[®] technology or 4G LTE
- Rich interfaces: DI/DO/AI/RS232/RS485/PT100 RTD input
- Customized trigger rules
- Desk, wall & DIN mounting
- Support Milesight D2D Featuring LoRa[®]

LoRaWAN



UC51x Series LoRaWAN® Solenoid Valve Controller

- 2 x outputs for connecting DC latching solenoid valve
- Two GPIO interfaces for flow monitoring or valve status monitoring
- DC powered or solar powered (UC511)
- Time and flow control
- LoRaWAN[®] certified (UC512)
- Battery life up to 10 years
- Support internal antenna or external antenna version
- Store locally 1000 historical records and support retransmission to prevent data loss







Milesight IoT Cloud

Milesight IoT Cloud provides unparalleled levels of vertical integration with Milesight LoRaWAN® devices.

• Transform real-time and historical data into drag-and-drop widgets on dashboard

- Control access and monitor projects from anywhere
- · Email and mobile push notifications based on triggered events
- Built on AWS to provide confidential and reliable infrastructure for your data
- Licensing with ease: just copy & paste and upgrade is done

DeviceHub

Milesight DeviceHub is a platform which is designed to provide a high-efficiency, low maintenance solution to easily deploy Milesight IoT devices (especially industrial cellular routers) across multiple locations, reducing complexity and increasing productivity.

