



### Application and project description


Garderos routers provide cyber-secure and reliable data connectivity for large-scale router networks in telecommunications and utility networks, as well as intelligent traffic systems. The Garderos R-7700 Series routers provide 2 LAN ports and a wide range of WAN interfaces such as: xDSL, Public Cellular and Private LTE. Configurations such as dual wireless WAN or alternatively xDSL with failover to wireless WAN are possible. Local WiFi access is optionally possible. Due to their high processing power, the R-7700 series routers can also host virtualized container applications.



Fig. 1: Garderos R-7700 multifunctional routers.

### Key features

- Wide range of WAN interfaces
- Central administration
- Scalable up to 10,000 routers with one server
- Routers periodically query server for new firmware or configuration
- Hardware and software watchdogs for highest availability
- Standard interfaces in GCS for easy integration with existing infrastructure
- Cyber security by design: secure protocols and functions

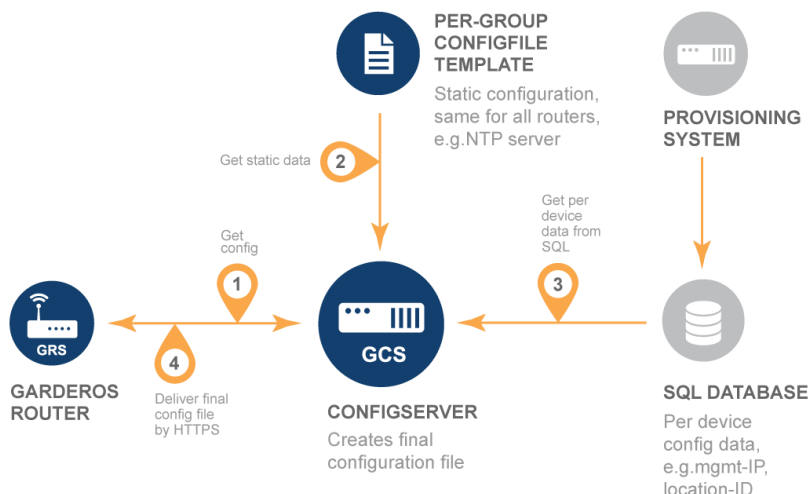

## HARDWARE FEATURES

<b>Casing</b>	Material Dimensions (WxHxD) without / with connectors without / with connectors (xDDSL type) Weight without / with xDSL Ingress protection IEC protection class Mounting	Diecast aluminum  44.5x110x115mm / 44.5x110x121mm 80.5x111x116mm / 80.5x111x121mm ~0.45kg / ~0.70kg IP40 3 Integrated DIN rail clip and mounting holes for external DIN rail clip or mounting bracket
<b>Temperature range</b>		Operating temperature range depends on router model. Please see "ordering information".
<b>Interfaces on casing</b>	Power connector Ethernet connector SFP connector DSL connector Serial connector WWAN antenna connector GPS antenna connector WLAN antenna connector I/O connector SIM card slot	Phoenix 2 pin 2x RJ-45; additional 1x RJ-45 (optional) 1x SFP cage (optional) 1x RJ-45 (depends on router model) 1x RJ-45 console/data + 1x D-Sub 9 (female) data (optional) up to 4x SMA (female) 1x SMA (female) (optional) up to 4x RP-SMA (female) Phoenix 4 Pin-PCB clamp (optional) 2x Mini-SIM (thermoresistant) or 1x Mini-SIM + 1x MFF-SIM chip (optional)
<b>Power supply</b>	Input voltage Power consumption	12-60 VDC (9,6VDC - 72VDC tolerance) ~4-15W
<b>Overheating protection</b>	Ambient temperature	off CPU >100°C on CPU < 80°C
<b>Serial interface</b>	RS-232 (console) RS-485 half-duplex (data) RS-232 (data)	1x 1x 1x (optional)
<b>Digital I/O</b>	Input / Output	1x/1x or 2x/0x (optional)
<b>WAN</b>	xDSL Ethernet (see LAN)	ADSL2+ Annex A, B, J, VDSL2, PTM/ATM, Vectoring
<b>WWAN</b>	Technology CDMA EVDO, 1x CDMA RUIIM, non-RUIIM Passive GPS Dual WWAN	2G/3G/4G <sup>1)</sup> , 4G <sup>2)</sup> , 2G/4G <sup>3)</sup> , CDMA <sup>4)</sup> CDMA <sup>4)</sup> CDMA <sup>4)</sup> 2G/3G/4G <sup>1)</sup>
<b>LAN</b>	Ethernet  Autosensing Auto-MDix	2x 10/100/1000Base-T, add. 1x 10/100/1000Base-T or 1x SFP 1000Base-X (optional)
<b>WLAN</b>	Supported standards Dual WLAN	802.11ac a/b/g/n
<b>Other features</b>	Hardware watchdog	Monitors "heartbeats" from router OS. Restarts router in case of software problems.
<b>Certifications</b>	Criteria for EMI immunity and radiation Vibration resistant Shock resistant	IEC 61850-3 (depends on router model) EN 60068-2-6:2008 EN 60068-2-27:2009
<b>Regulations</b>	RoHS, CE, FCC <sup>1,3)</sup>	

<sup>1)</sup> **2G/3G/4G Modul (CAT 4, global variant\*)**

LTE B1, B2, B3, B4, B5, B7, B8, B12, B13, B18, B19, B20, B26, B28, B38, B39, B40, B41  
WCDMA B1, B2, B4, B5, B6, B8, B19  
EDGE/GPRS/GSM 850/900/1800/1900MHz

<sup>2)</sup> **4G Modul (CAT 4, European variant\*)**

LTE/LTE450 B3, B7, B20, B31, B72

<sup>3)</sup> **2G/4G Modul (CAT M1, European variant\*)**

LTE/LTE450 B1, B2, B3, B4, B5, B8, B12, B13, B14, B18, B19, B20, B25, B26, B27, B28, B31, B66, B72, B85  
EDGE/GPRS/GSM 850/900/1800/1900MHz

<sup>4)</sup> **CDMA 450MHz Modul**

EV-DO Rev. A, B  
1xRTT  
R-UIM und non R-UIM

\*other variants available

## SOFTWARE FEATURES

### Operating system

- Garderos Router Software (GRS) Rel. 3.7

### Common

- IPv4, IPv6
- IPv4/IPv6 dual stack
- Multiple IP addresses per interface
- IPv6 prefix delegation

### WWAN <sup>1)</sup>

- PPP over WWAN <sup>3, 4)</sup>
- Dual WAN (WWAN, Ethernet, VLAN) <sup>1, 2, 3, 4)</sup>
- Dual WWAN (WWAN, WWAN) <sup>1, 2, 3, 4)</sup>
- Configurable WWAN network selection <sup>1, 2, 3)</sup>
- Configurable WWAN band selection <sup>1, 2, 3)</sup>
- Multiple APN <sup>2)</sup>
- Intelligent APN selection <sup>1, 2)</sup>
- WWAN IPv4 <sup>1, 2, 3, 4)</sup>
- WWAN IPv6 <sup>1, 2, 4)</sup>
- WWAN dual stack <sup>1, 2, 4)</sup>
- IPv6 prefix delegation <sup>2, 4)</sup>
- Dual SIM <sup>1, 2, 3)</sup>
- Modem firmware update <sup>2)</sup>
- XCAL debugging <sup>2)</sup>
- CDMA RUIIM and non-RUIIM <sup>3)</sup>
- CDMA ESN and MEID authentication <sup>3)</sup>

### WLAN <sup>1)</sup>

- 802.11ac a/b/g/n
- AP and client
- 8x SSID (2,4GHz) + 8x SSID (5,5GHz)
- WPA, WPA2, WPA3
- 802.11i (EAP)

### Other network interfaces

#### Bridge

- Layer 2 bridge interface
- STP, RSTP
- IP assignment static IP, DHCP, IPv6 SLAAC, PD

#### Ethernet

- Configurable link speed
- IP assignment static IP, DHCP, IPv6 SLAAC, PD
- Port mirroring
- 802.1x

#### Local loop

- Local loop interface
- IP assignment static IP, PD

#### PPPoE

- IP assignment static IP, PPPoE, IPv6 SLAAC
- PAP and CHAP
- Always on
- Time controlled session termination before provider reconnect

#### VLAN

- VLAN support (802.1q and priority tagging)
- IP assignment static IP, DHCP, IPv6 SLAAC, PD
- 802.1x

#### Routing

- Static routes (IPv4, IPv6)
- Static policy routing (IPv4, IPv6)
- Static routes to DHCP gateway (IPv4)
- Dynamic routing protocols RIPv2, OSPFv2, OSPFv3, BGPv4
- Filtering for dynamic routing protocols
- Firewall (IPv4, IPv6, packet filter, connection tracking, bridge filter)
- MAC address filter, Invalid-packet-filter
- NAT (IPv4, IPv6, PAT, 1-to-1, SNAT, port forwarding)
- Synchronous routing
- Configurable MTU
- Path MTU discovery
- TCP MSS adjustment
- Diffserv (set DSCP bits)
- QoS packet prioritization
- Reverse path filter

#### VPN

##### GRE

- GRE, GRE IPv6, GRE TAP, GRE TAP IPv6
- Configurable MTU and MTU inherit
- NHRP dynamic tunnel management

##### mGRE

- Configurable MTU and MTU inherit
- NHRP dynamic tunnel management
- NHRP IPv6

#### IPsec

- IPsec IPv4, IPv6
- IKEv1, IKEv2
- Authentication: PSK, public key, RSA and ECDSA certificate
- Tunnel and transport mode
- VTI (Virtual Tunnel Interface)
- Encryption algorithms AES, AES192, AES256, CCM+GCM, DES, 3DES
- RSA key length up to 8192 bit, elliptic curves
- Throughput max. 60 Mb/s
- Throughput (3des-sha1-modp1024) 21 Mb/s
- Throughput (aes-sha256-modp4096) 39 Mb/s
- VPN gateway
- Min. number tunnels: 5

#### L2TP

- Unmanaged L2TPv3 tunnel
- VLAN tagged L2TPv3 tunnel

#### Open VPN

- PSK, user and certificate authentication
- Min. number tunnels: 5
- OpenVPN Layer 2 and 3
- Bridging OpenVPN Layer 2 Tunnel
- Encryption algorithms AES, AES192, AES256, CCM+GCM, Blowfish, DES, 3DES

#### MIP

- Mobile IP foreign agent

#### Router management

- RS-232 management console
- Authentication by TACACS+, RADIUS, password file and public key
- Administrator roles
- Command line interface (CLI)
- Remote configuration file download (HTTP/HTTPS)
- Trigger based configuration selection
- OSCP
- Authentication by HTTP basic auth and certificate
- Remote software updates
- Central bulk management of routers

#### Services

- Cronjob
- DHCP server (IPv4+IPv6)
- DHCP relay (IPv4+IPv6)
- DHCP snooping (IPv4)
- DHCP address pools per VLAN/interface
- DHCP secure ARP
- DHCP ARP ping before assigning lease
- DHCP accounting (RADIUS)
- Static DHCP (MAC)
- DNS server and proxy
- DynDNS client
- EST (Enrolment over Secure Transport)
- Ethernet port security (sticky MAC detection)
- Hotspot portal
- IPv6 SLAAC daemon
- LLDLP
- MQTT (I/O control) <sup>1)</sup>
- NMEA <sup>1)</sup>
- NTP client, server, MD5, local time source
- SCEP (Simple Certificate Enrolment Protocol)
- SNMPv2 and SNMPv3, monitoring and traps
- SNTP (Simple NTP)
- SSH client, server
- Syslog local, remote, persistent in flash
- Telnet client, server

#### Other functions

- Configurable LED (also project based)
- Hardware and software watchdogs
- LXC virtualization, busybox and Alpine (project based)
- Status monitor (ping, interface status, IPv6-RS, RX-TX, script)
- Reset to factory defaults
- Customer defined factory defaults
- Security hardening (switch off unsecure features)
- Encrypted configuration
- Secure Boot
- Serial-to-network proxy (ser2net), IPv4/IPv6, TCP/UDP
- Serial modes: Console, Off and Script
- Scripting interface
- Open APIs for network integration

<sup>1)</sup> Prerequisite is a suitable interface.  
<sup>1, 2, 3, 4)</sup> Please see "Hardware Features".

## ORDERING INFORMATION

**Garderos model number:**

1, 2, 3, 4) Please see "Hardware Features".

\*) Wide casing 80,5x111x116mm, required!

\*\*) Wide casing 80,5x111x116mm, required depending on options!

**Maximum operating temperature range**  
(The temperature range may differ depending on the router variant)

	Ethernet (10/100/1000 Base-T)	Ethernet (10/100/1000 Base-T); optional	SFP (1000Base-X); optional	RS-232 (console)	RS-232 (data); optional **)	Digital I/O; optional **)	WLAN (802.11ac a/b/g/n)	XDSL *)	CDMA 450 Module 4)	2G/3G/4G Module 1) 4G Module 2) 2G/4G Module 3)	Maximum operating temperature range (The temperature range may differ depending on the router variant)
R-7701 (2xLAN/WLAN)	2	1	1	1	1	1	1				-25°C to +70°C
R-7703 (2xLAN/2xWLAN)	2			1	1	1	2				-25°C to +70°C
R-7707 (2xLAN)	2	1	1	1	1	1					-40°C to +75°C
R-7711 (2xLAN/xDSL/WLAN)	2			1	1	1	1	1			-25°C to +60°C at 12-24VDC -25°C to +50°C at 60VDC
R-7717 (2xLAN/xDSL)	2			1	1	1		1			-35°C to +60°C at 12-24VDC -35°C to +50°C at 60VDC
R-7722 (2xLAN/4G/WLAN)	2	1	1	1	1	1	1			1	-25°C to +70°C
R-7728 (2xLAN/4G)	2	1	1	1	1	1				1	-40°C to +75°C
R-7731 (2xLAN/xDSL/CDMA/WLAN)	2			1	1	1	1	1	1		-25°C to +60°C at 12-24VDC -25°C to +50°C at 60VDC
R-7737 (2xLAN/xDSL/CDMA)	2			1	1	1		1	1		-35°C to +60°C at 12-24VDC -35°C to +50°C at 60VDC
R-7748 (2xLAN/4G/CDMA)	2	1	1	1	1	1			1	1	-35°C to +75°C
R-7758 (2xLAN/4G/4G)	2	1	1	1	1	1				2	-40°C to +75°C
R-7762 (2xLAN/xDSL/4G/WLAN)	2			1	1	1	1	1		1	-25°C to +60°C at 12-24VDC -25°C to +50°C at 60VDC
R-7768 (2xLAN/xDSL/4G)	2			1	1	1		1		1	-35°C to +60°C at 12-24VDC -35°C to +50°C at 60VDC
R-7771 (2xLAN/CDMA/WLAN)	2	1	1	1		1	1		1		-25°C to +70°C
R-7777 (2xLAN/CDMA)	2	1	1	1	1	1			1		-35°C to +75°C

**Garderos GmbH**  
Balanstrasse 55  
81541 München  
Germany

[www.garderos.com](http://www.garderos.com)  
Email: [info@garderos.com](mailto:info@garderos.com)

T: +49 89 189306-0  
F: +49 89 189306-98

All trademarks shown are registered trademarks of their respective owners.  
Please note that all data and information subject to technical modifications.  
© 2024: Garderos GmbH | Data Sheet R-7700 Series | Version 1.14 – February 2024