

Generation

4

you



**Complete solution for industrial
and commercial smart metering**

Road milestones



1992 - ELGAS, s.r.o. founded

1993 - market presentation of ZOD-4 and ZOD-4P

1994 - world premiere of ELCOR-94, the 1st generation of EVC

1999 - established authorised ELGAS metrological center

2001 - microELCOR launching - the 2nd generation of EVC

2002 - new assembly plant opened in Horní Jelení

2004 - new sales strategy - focus on international markets

2008 - xELCOR series launching – the 3rd generation of EVC

2009 - maxiELCOR - the first EVC with integrated GSM modem

2011 - ELGAS became as Smart metering projects leader

2013 - picoELCOR diaphragm gasmeter with integrated EVC


2014 - GWF aquisition - ELGAS gas meter manufacturer

2017 - gas meters EMR (RPD) and EMT (axial turbine) series

2018 - ELCOR*plus* launching - the 4th generation of EVC

2021 - ELCOR*lite* launching - new member of 4th generation


2022 - picoELCOR-2 - new generation of picoELCOR solution

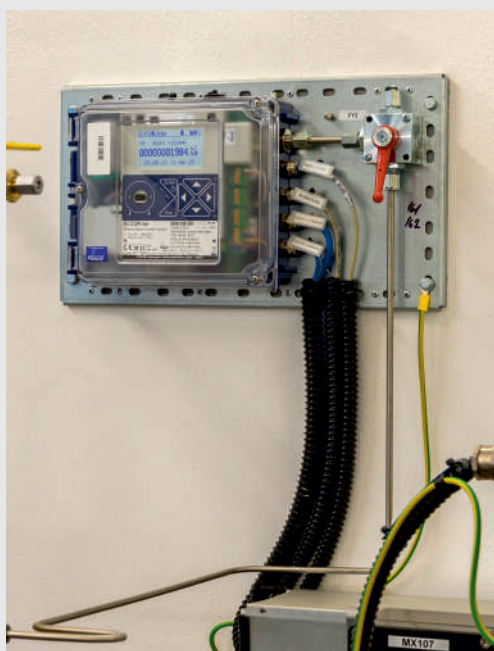



The company ELGAS, s.r.o. is one of the largest manufacturers of gas volume correctors ranking worldwide in TOP 5. The company was founded in 1992 as Czech private company. Since the beginning ELGAS, s.r.o. was fully involved in development and production of technologies like gas volume correctors, dataloggers, radio communication and AMR systems, dedicated mainly for gas industry.

All company products and solutions are developed by ELGAS, s.r.o. own Research and Development department, having staff of more than 30 HW and SW engineers. The main goal for R&D team is to develop top technology and prepare complete and flexible solution according to the latest specifications and demands of customers.

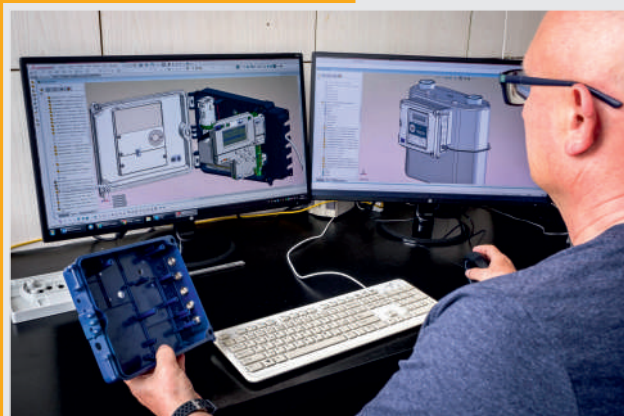

In 2012 ELGAS, s.r.o. management decided to extend business activities presenting ELGAS, s.r.o. as manufacturer of gas meters as well. Starting with integrated solution based on diaphragm gas meter, ELGAS, s.r.o. continues with development and production of rotary and turbine gasmeters for commercial and industrial customers. It enables to cover all worldwide market demands from gas volume correctors and gas meters up to integrated and hybrid solutions.

All three production plants are certified with quality management system ISO 9001 to ensure top quality products with high accuracy and high reliability. Equally the production is organized to fully comply with all strict requirements and standards necessary for devices installed in hazardous area (ATEX and IECEx).



To achieve the highest accuracy and quality, the production line is equipped with the latest technology such as temperature chambers, cyclic tests chambers, calibration gauges and the other facilities. All steps in manufacturing are controlled and recorded by automatic system enabling to trace back the history of all products. Each product is carefully tested in quality management department with use of all available information from production cycle. It's important not only for better understanding of products behaviour, but also for quality management and as a feedback for research and development team.



The most of ELGAS, s.r.o. products as gas volume correctors and gas meters are dedicated for custody transfer which means that metrological verification and final certificate are mandatory. Authorized metrological center, accredited according to Czech metrological law, was established for such purposes in ELGAS, s.r.o. in year 1994. Since the beginning more than 350.000 units have been successfully tested and verified, most of them under MID rules with module B and D.

ELGAS, s.r.o. operates with wide network of business partners. More than 55 business partners distribute ELGAS, s.r.o. products and solutions in almost 75 countries. They are helping to support main ELGAS, s.r.o. goal to create long-term partnership with all end users bringing them successful, powerfull and reliable solution.



Gas volume corrector ELCOR / DATCOM

- Single channel EVC
- Embedded modem 2G, 4G, NB
- ATEX approved ZONE 0, 1, 2
- Battery power supply only
- Datalogger version option
- Compact design
- IP66



Gas volume corrector ELCORlite / DATCOMlite

- Single channel EVC
- Embedded modem 2G, 4G, NB
- ATEX approved ZONE 0, 1, 2
- External power supply (optional)
- Datalogger version option
- Compact design
- IP66



Gas volume corrector ELCORplus / DATCOMplus

- Single or dual channel EVC
- Embedded modem 2G, 4G, NB
- ATEX approved ZONE 0, 1, 2
- Modular and scalable design
- Telemetry features
- Datalogger version
- Up to 6 digital transducers
- Special variant for ZONE 2 only



Diaphragm gas meter picoELCOR-2

- Available in sizes G10, G16, G25
- Electronic index
- Full PTZ volume correction
- Embedded modem 2G, 4G, NB
- Up to 15 years battery life
- Hazardous area Type approval ATEX (ZONE 1)
- Metrological Type approval MID
- Pulse output



Radial turbine gasmeter TRZ, EQZ, EQZK

- Sizes DN 40-100 G16-400
- Accuracy $\pm 1\%$ (TRZ), $\pm 1.5\%$ (EQZ/K)
- Self-lubricated longlife bearings
- Exchangeable measuring head, designed for easy replacement
- Optional over-run brake
- Measuring range from 1:10 to 1:20



Axial turbine gas meter EMT series

- EMT-Lx DN 50-300 G 65-6500
- PN16-100/ANSI 150-600
- EMT-S DN 80-200 G 100-1600
- PN16-100/ANSI 150-600
- Accuracy $\pm 1\%$
- Compliant with MID or OIML
- Removable cartridge
- Light aluminum bodies up to DN 200

Generation 4 you

Rotary gas meter EMR series

- Sizes DN 40-150 G10-650
PN16-100/ANSI 150-600
- Measuring range from 1:32 to 1:160
- Accuracy $\pm 1\%$
- Compliant with MID or OIML
- Robust and reliable design
- Aluminum body for PN16/ANSI150



Accessories, safety barriers

- B-PRO** - safety barrier integrating PS-E, B-RS and B-DO
- PS-M** - intrinsically safe power supply module for embedded modem
- PS-E** - intrinsically safe power supply module for EVC part
- B-RS** - safety barrier for serial communication RS232/RS485
- B-DO** - safety barrier for digital outputs
- B-IB** - safety barrier for internal bus RS485
- CLO** - module of current loop output 4 -20 mA
- SRM** - solar regulator module
- HIE-04 mod B** - USB 2.0 optical interface



Service and configuration software - COMPASS

- User friendly Windows based software
- Advanced configuration
- Guided parametrization
- Local language
- Database file system
- Reading of actual and archived data
- Data processing and visualisation
- Data export
- AMR (automated meter reading)



INFRARED HEAD HIE-04 mod B USB communication interface

Infrared head HIE-04 is determined for data transmission between personal computer and electronic volume conversion device (EVC), dataloggers and AMR devices made by ELGAS, s.r.o. HIE-04 has been designed according to EN 62056-21 standard (former IEC-1107 standard).

- Infrared optical interface according to EN 62056-21 standard
- Designed to be used in hazardous areas ZONE 1 a ZONE 2
- Serial interface USB 2.0
- Cable length 2,25 m or 4,5 m
- Communication baud rate 115200Bd
- EC Certification FTZU 08 ATEX 0267X
- Classification II 2G Ex mb II T4



ELCOR and ELCORplus



Highlights

- High accuracy and stability of measurement
- Embedded modem 2G/4G/NB
- Robust design
- Modular technology
- MID and ATEX approved
- Long battery life
- Designed for the future upgrades
- Tamper proof

...get the best from ELGAS longtime experience

Introduction

The latest ELGAS technology ELCORplus and ELCOR represents powerfull solution applicable either like electronic volume corrector for billing purposes or like universal datalogger for station control and monitoring.

ELCORplus

The most powerfull model is ELCORplus. Its robust design together with tremendous modularity covers all known demands of gas segment over EVC (ELCORplus) and datalogger installation (DATCOMplus).

Battery powered ELCORplus converts gas volume under operating conditions to gas volume at base conditions, according to state equation. Information about primary volume can be received from all types of gasmeters through LF pulses (reed contact or wiegand sensor), HF pulses and absolute encoders (NAMUR, SCR+). The meter can be connected through mechanical index with ELGAS relative encoder. EVC calculates the conversion factor C based on actual value of gas pressure, gas temperature and based on compressibility factor according to all known methods.

Lifetime of the EVC battery is up to 18 years in defined conditions and the design also allows to use encoders (NAMUR, SCR+) with battery power supply. The battery life is up to 9 years in such case.

The basic concept enables to use device either as a single or dual channel EVC with possibility to add non-metrological channel. Modular architecture enables to create various configurations up to 6 pressure or temperature transducers, 10 digital inputs, 4 digital outputs, 6 analogue inputs and 4 analogue outputs, based on customer requirements.

Both models are designed as compact devices integrating measuring metrological part together with communication unit and with telemetry features as well.



Any configuration can be individually customised by parameter file locally or remotely.

All data (instantaneous, archived data, diagnostics) can be visible on backlit graphical LCD display with using 6-buttons keypad. This keypad and LCD combination enables simple parameters setup as well.

All measured and calculated data can be optionally stored at 11 different archives with sufficient memory capacity covering couple of years without overwriting of old records.

Generation 4 you



In addition to metrological measuring part ELCOR_{plus} can handle two independent communication modems, internal and external. There are selectable modem modules for 2G, 4G and NB. Modular design is suitable for easy replacement with future generation of modems without interruption of functioning. All versions even with internal modem are approved for installation in hazardous areas Ex Zone 0, 1, 2.

Lifetime of modem battery with regular calling once a day is guaranteed at least 11 years in defined mode of working. For more frequent communication (or permanent) the external power supply module (AC or solar) can be applied for powering EVC and modem separately.

Except modems there are parallelly usable two selectable serial interfaces RS232 and RS485 and local infrared interface.

The data can be transferred independently to data collection system (billing) or monitoring and control system (Scada). Various communication protocols are available. The protocol can be selected by enduser for each communication channel independently. The data transfer is equipped with access protection, encryption tools and system of firmware remote download.

ELCOR_{plus} is designed in robust polycarbonate housing suitable for indoor or outdoor installation. This cabinet is fully resistant against external tampering and disturbances with massive locking lever.



ELCOR

ELCOR is simplified version of bigger ELCOR_{plus}. The versatility is limited comparing the bigger model. It is designed as single channel EVC with only one RS485 (or RS232) serial port and with optional embedded modem both powered by batteries. ELCOR is suitable for standard projects where reliable and smart EVC is required.

Datalogger DATCOM and DATCOM_{plus}

For telemetry projects where dataloggers are required DATCOM and DATCOM_{plus} are available. They use identical HW and FW features as EVC series enhanced with functionality typical for dataloggers installations. Advantages of open architecture together with flexible internal structure of ELGAS dataloggers series brings unlimited solution for any project in gas segment.





Technical specifications

	ELCOR	ELCORplus
Housing	The housing was designed for use in outdoor with focus on robustness and resistance against tampering. It can be sealed and secured by a suitable lock. The housing is equipped with a closing mechanism keeping the lid closed tightly even without securing the lid by screws.	
Material	Glass fiber polycarbonate	
Dimensions	210 x 190 x 93 mm	263 x 201 x 111 mm
Weight (depends on configuration)	1.5 kg	2.2 kg
Protection class	IP66, outdoor environment	
Working temperature	-25°C to +70°C (optionally from -40°C)	
Control panel	The new ELCOR series brings even better capacitive keypad very well known from picoELCOR series.	
	6 button capacitive keypad	
Display	Local reading of all measured instantaneous and archived data.	
Standard variant	Graphic backlit LCD 128 x 64	
Optional	Alphanumeric segment backlit LCD (working from -40 °C; always ON)	
Digital transducers	The new generation of digital transducers brings traditional high stability and accuracy of ELGAS pressure and temperature transducers.	
	Up to 2 digital transducers	Up to 6 digital transducers
Pressure transducer type	EDT 96 (MODBUS-RTU protocol, RS485 interface)	
Standard MID approved ranges - absolute (accuracy 0.25% of measured value)	0.8 - 5.2; 2 - 10; 4 - 20; 7 - 35; 14 - 70; 25 - 130 bar	
Extended MID approved ranges - absolute (accuracy 0.25% of measured value)	0.8 - 10; 0.8 - 20; 4 - 70 bar	
Non MID ranges - absolute (accuracy 0.2% full scale)	0.8 - 35; 0.8 - 70; 0.8 - 130 bar	
Non MID ranges - gauge (accuracy 0.4% full scale - below 1 bar) (accuracy 0.2% full scale - above 1 bar)	0 - 0.2; 0 - 1; 0 - 1.6; 0 - 4; 0 - 6; 0 - 10; 0 - 25; 0 - 40; 0 - 70 bar	
Temperature transducer type	EDT 101 (MODBUS-RTU protocol, RS485 interface)	
Measuring range standard	-25°C to +70°C	
Measuring range extended	-40°C to +70°C	
Power supply	The device is designed as battery power supplied (ELCOR) with an option of external power supply either from solar pannel or from mains 120V/230V AC (using external modules placed in non-hazardous area).	
EVC battery packs - battery life (in defined conditions)	B-03/B-03U (17Ah) lithium battery - up to 11 years	B-03/B-03U (17Ah) lithium battery - up to 11 years B-03DU (30Ah) lithium battery - up to 18 years (B-03A alkaline battery - up to 6 years)
- with NAMUR interface encoder - with SCR+ interface encoder	- not supported - up to 5 years	- up to 5 years (B-03DU) - up to 9 years (B-03DU)
Modem battery packs - battery life (in defined conditions)	HB-03U (GSM/GPRS / LTE NB modem, lithium battery, 17Ah) - 10/12 years HB-03D (GSM/GPRS modem, lithium battery, 24Ah) - up to 11 years HB-04 / HB-04U (LTE-Cat1 modem, lithium battery, 12Ah / 7,7Ah) - up to 7 years	
External power supply	not available	PS-E external module (EVC) PS-M external module (MODEM)
Communication with the device	Both models supports various communication interfaces allowing local or remote communication.	
Serial communication interface	1x RS232 or RS485	2x RS232 or RS485
Optical communication interface	optical interface (EN 62056-21)	
Wireless communication (modem)	GSM/GPRS LTE Cat1 LTE CatM1 LTE NB	

Technical specifications

	ELCOR	ELCOR _{plus}
Inputs/Outputs	The device provides digital inputs and outputs fully configurable by end user.	
Digital inputs	3x (LF or binary)	up to 10x (LF, HF, binary)
Digital outputs	2x (LF or binary)	4x (LF or binary)
Analog inputs (4-20mA)	not available	up to 6x (optional)
Analog outputs (4-20mA)	2x (using external module CLO)	up to 4x integrated (optional) up to 4x (using external module CLO)
Encoder interface	Various encoders are supported	
Encoder types supported	NAMUR, SCR/SCR+, ELGAS	
Extension internal modules	ELCOR and ELCOR_{plus} series was developed as modular device enabling full customization.	
Communication	Modem	M2G: 2G modem M4G: 2G/3G/4G - LTE Cat1 modem M4GM1: LTE M1 modem LTE-NB (preliminary)
	Serial interface	integrated S1-COM: RS232/RS485 serial interface
Gas meter encoder interface	S0-SCR: SCR+ encoder interface S0-NAM: NAMUR encoder interface	
Analog 4 - 20mA input/output	Inputs	not available S1-2AI: 2x input
	Outputs	not available (externally via CLO module) S1-2AO: 2x output
External power supply	EVC	not available S3-PWR1
	Modem	S4-PWR2
Multipurpose extension board	not available	S0-EXT1: 2x HF NAMUR input 6x LF/Binary digital input 2x Analog input (4 - 20 mA) 2x digital transducer EDT
Intrinsic safety	ELCOR_{plus} is available also in a special ZONE 2 variant	
Classification (according to variant)	Ex II 1G Ex ia IIB T4 Ga / Ex II 1G Ex ia IIB T3 Ga / Ex II 2G Ex ib IIB T4 Gb - Ex II 2G Ex ib IIA T3 Gb Ex II 3G Ex ic IIB T4 Gc - ZONE 2 variant	
Type approval ATEX (2014/34/EU)	FTZÚ 17 ATEX 0143X - FTZÚ 19 ATEX 0002X - ZONE 2 variant	
Metrology	High accuracy and long-term stability measurement	
EVC type according to MID	volume corrector Type 1	
Variants	PTZ / T-corrector	
Maximum error according to MID (%)	0.5	
Typical error (%)	0.15	
Type approval MID (2014/32/EU)	TCM 143/20 - 5757	

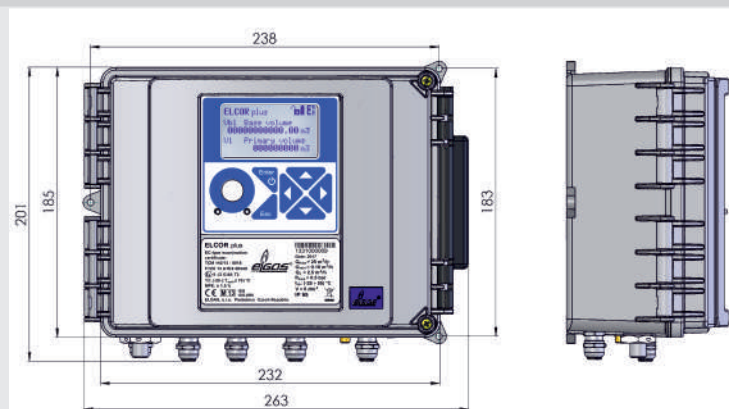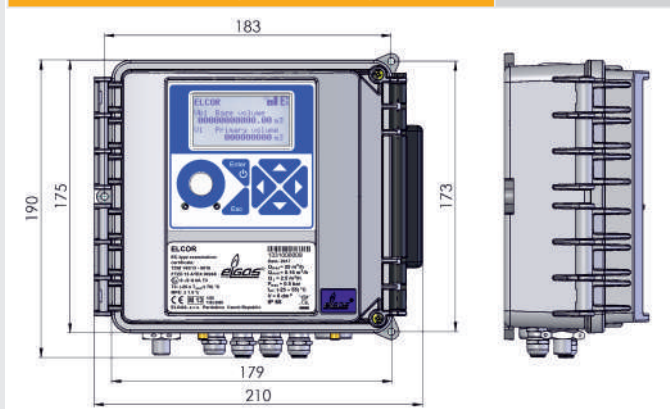

ELCOR^{lite}



Highlights

- Battery power supplied
- External power supply (optional)
- High accuracy and stability of measurement
- Embedded modem 2G/4G/NB (optional)
- Possibility to replace the modem on site
- MID and ATEX approved
- Long battery life
- Excellent price/performance ratio
- Antitamper protection

...get the best from ELGAS longtime experience

Introduction

The newest member of the gas volume corrector family manufactured by ELGAS company.

ELCOR^{lite} is battery power supplied gas volume corrector based on ELCOR and ELCOR^{plus} models.

It is a volume corrector with an integrated modem, optimized for projects where the modularity of higher models is not required.

Device description

ELCOR^{lite} is a single-channel gas volume corrector powered by lithium batteries. Low frequency pulse inputs are used to connect to the gas meter. Pressure measurement is provided by the latest type of digital pressure transducer ELGAS EDT 125, which can be installed to the device as internal or external. Very wide measuring ranges (e.g. 0,8 - 20 Bar) make it easier for the user to use the device in various types of measurements. Temperature measurement is again performed by ELGAS product namely the EDT 124 temperature transducer which is a new digital converter with a semiconductor sensing element.

The local user interface is realized by LCD graphic display with backlight, which allows in combination with up to 6-button keyboard display of all information, including stored data and also offers the possibility to change the settings of basic parameters. Alternatively, the device can be supplied with a segment display, which allows a permanent display of the measured quantities. Communication with the corrector can be realized using a metallic RS485/RS232 serial interface. An optical interface (according to IEC-1107 / IEC 62056-21) is used for local setting or local data reading.



The device includes an optional integrated modem, which is available in variants that support all currently available networks, including IoT (Internet of Things) networks. In the future, the modem can be replaced at the installation site with a type supporting more modern technologies. ELCOR^{lite} is powered by batteries with a high capacity, ensuring the operation of the device for more than 10 years. The modem is powered by its own lithium battery which depending on the selected modem, allows the modem to operate for a period of time up to 20 years (in LTE-NB networks). Optionally, ELCOR^{lite} can be powered from an external source, both the corrector and the modem (PS-E and PS-M1 power supplies).

Generation 4

Technical specifications

Intrinsic safety	
Classification (according to variant)	Ex II 1G Ex ia IIB T4 Ga / Ex II 2G Ex ib IIB T3 Gb
Type approval ATEX (2014/34/EU)	FTZÚ 20 ATEX 0067X
Metrology	
EVC type according to MID	volume corrector Type 1
Variants	PTZ / T-corrector
Maximum error according to MID (%)	0.5
Typical error (%)	0.15
Type approval MID (2014/32/EU)	TCM 143/20 - 5757
Housing	
Housing material	Polycarbonate
Dimensions (W x H x D, mm)	234 x 182 x 61
Weight (kg)	approx. 1.5
Ingress protection (EN 60529)	IP 66, outdoor conditions
Environment temperature	-25°C to +70°C (optionally from -40°C)
Control panel	
Keypad	6 keys, capacitive keypad
Display	
Standard version	Graphical, backlit LCD, 128 x 64 pixels, activation from the keypad
Optionally	Segment backlit LCD, permanent display of values (working from -40 °C)
Pressure measurement	
Pressure transducer type	EDT 125 (internal or external)
Measuring ranges according to MID (kPa) accuracy 0.25% from measured value	0,8 - 5,2; 2 - 10; 4 - 20
Extended ranges according to MID (kPa) accuracy 0.25% from measured value	0,8 - 10; 0,8 - 20
Temperature measurement	
Temperature transducer type	EDT 124
Standard measuring ranges	-25°C to +70°C
Extended measuring ranges	-40°C to +70°C
Digital inputs	
Number	4
Configurable as	LF pulse / binary
Digital outputs	
Number	2
Configurable as	LF pulse / binary / analog (4 - 20 mA via external module CLO)
Communication interface	
IR optical interface	IEC-1107 / IEC 62056-21
Metalic serial interface	RS 485 (or RS 232 as option)
Modem	2G (GPRS) / 4G (LTE-Cat1) / 4G (LTE-CatM1) / 4G (LTE-NB)
Corrector power supply	
Battery type	Lithium battery, D cell, SAFT LS 33600 (3,6V/17Ah) / C cell, 2x SAFT LS 26500
Battery life	12 years (at defined conditions)
External power supply	Intrinsically safe power supply module PS-E
Modem power supply	
Battery type	HBL-03 / HBL-03U / HBL-04U (according to the modem used)
Battery life	5 - 20 years (according to the modem used)
External power supply	Intrinsically safe power supply module PS-M1

PS-E, PS-M/M1


PS-E

- for EVC only
- for ELCOR $plus$, ELCOR $lite$ DATCOM $plus$, DATCOM $lite$
- 35 mm DIN rail mounting
- supply voltage range 10.5 - 15V DC
- no-load output voltage 4,6VDC



Intrinsically safe power supply for EVC

Intrinsically safe power supply PS-E is intended for external power supply of the main electronics (volume corrector part/data logger part) of ELCOR $plus$, ELCOR $plus$ indexer, ELCOR $lite$, DATCOM $plus$ or DATCOM $lite$. The PS-E module is supplied with a DC voltage of 12 V. It is inbuilt in a plastic box and it is intended for mounting onto a 35 mm DIN rail. The use of an external power supply module PS-E is recommended if the operating mode of the corrector/datalogger is set to have a higher battery consumption which shortens the battery life (e.g. on-line communication).

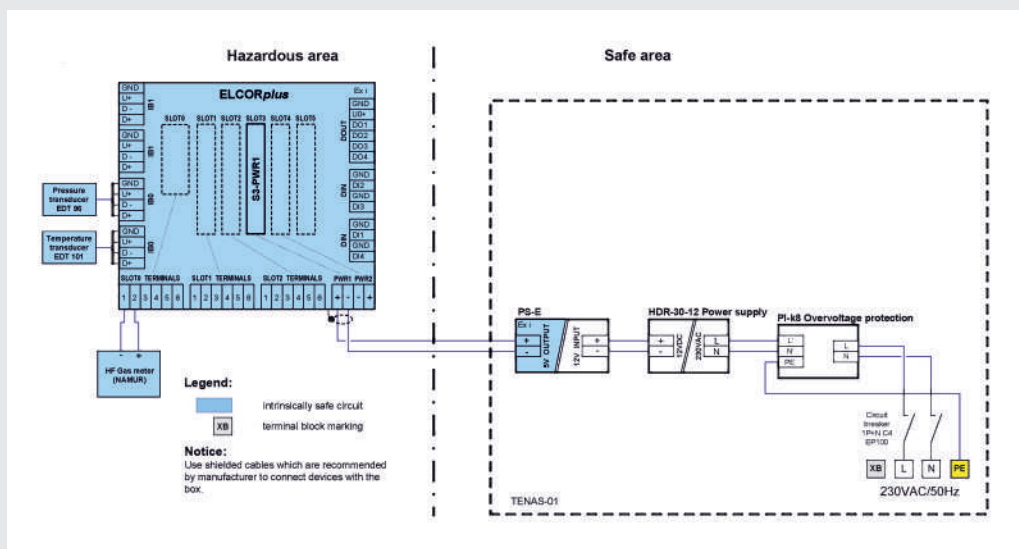


PS-M/PS-M1

- for modem only
- for ELCOR $plus$, ELCOR $lite$ DATCOM $plus$, DATCOM $lite$
- 35 mm DIN rail mounting
- supply voltage range 10.5 - 15V DC
- no-load output voltage 5.2V DC



Intrinsically safe power supply for internal modems


The intrinsically safe power supply PS-M is intended for external power supply of the internal modem of ELCOR $plus$, ELCOR $plus$ indexer, DATCOM $plus$, ELCOR $lite$ (only for 4G LTE-Cat1) or DATCOM $lite$ (only for 4G LTE-Cat1). The module is placed in a plastic box and it is designed for mounting on a distribution board on a 35 mm DIN rail. The variant PS-M1 is designed for external power supply of the internal modem of ELCOR $lite$ (without 4G LTE-Cat1) or DATCOM $lite$ (without 4G LTE-Cat1).

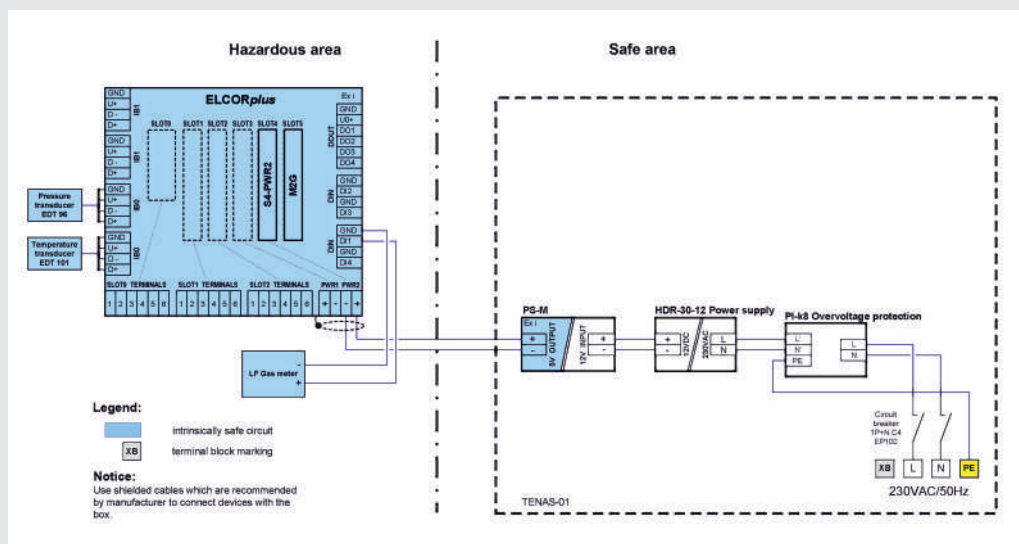

B-RS, B-DO

Safety barrier for serial communication

Communication barrier interface between intrinsically safe circuits (devices located in an explosive environment) and circuits located outside the potentially explosive areas. The device performs function of an intrinsically safe separator for the communication circuits of the gas volume conversion device. With its use it is possible to connect standard devices for reading/writing data via RS485 (RS232) communication (e.g. PC, PCL automat, external modem, etc.) to gas volume corrector.

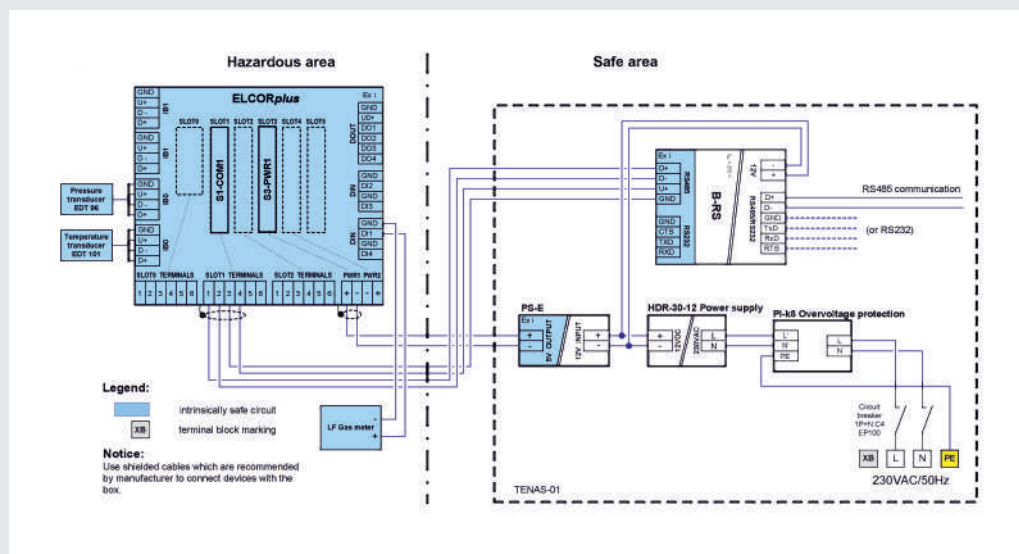


B-RS

- serial interface barrier
- hazardous area interface - RS485
- non hazardous area interface - RS485 or RS232
- 35 mm DIN rail mounting
- supply voltage range 10.5 - 15V DC



Safety barrier for digital outputs

B-DO digital output barrier creates a separation between intrinsically safe digital outputs of ELGAS volume correctors and other circuits that are located outside of hazardous area. With its use, the conventional devices designed to process output signals (such as pulse, binary or digital coding) can be easily connected to intrinsically safe digital outputs of gas volume correctors and dataloggers. The module is placed in a plastic box and it is designed for mounting a 35 mm DIN rail. The B-DO digital output separator is powered by 12 V DC.

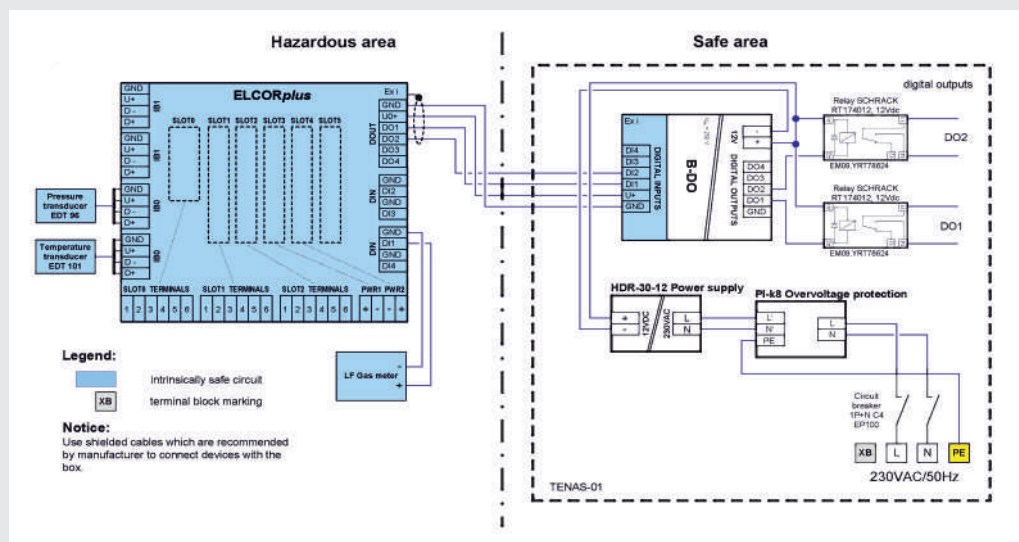

B-DO

- barrier for digital outputs
- 4x inputs
- 4x outputs, open collector
- binary or pulse signal
- 35 mm DIN rail mounting
- supply voltage range 10.5 - 15V DC



B-PRO, CLO

B-PRO

- integrated safety barrier (2x digital outputs, serial interface, EVC power supply)
- for ELCORplus, ELCORlite, DATCOMplus, DATCOMlite
- 35 mm DIN rail mounting
- supply voltage range 10.5 - 15V DC




Integrated safety barrier (PS-E + B-RS + B-DO)

The B-PRO module combines functions from three separate modules: PS-E, B-RS and B-DO. The module provides following features:

- safety separating barrier for RS485 communication line with possibility of conversion to RS232
- two safety separating barriers for the digital outputs of the converter/datalogger
- power supply barrier for the corrector/datalogger (part of the EVC)

The combined module B-PRO (B-PRO/A) is powered by 12 V DC.

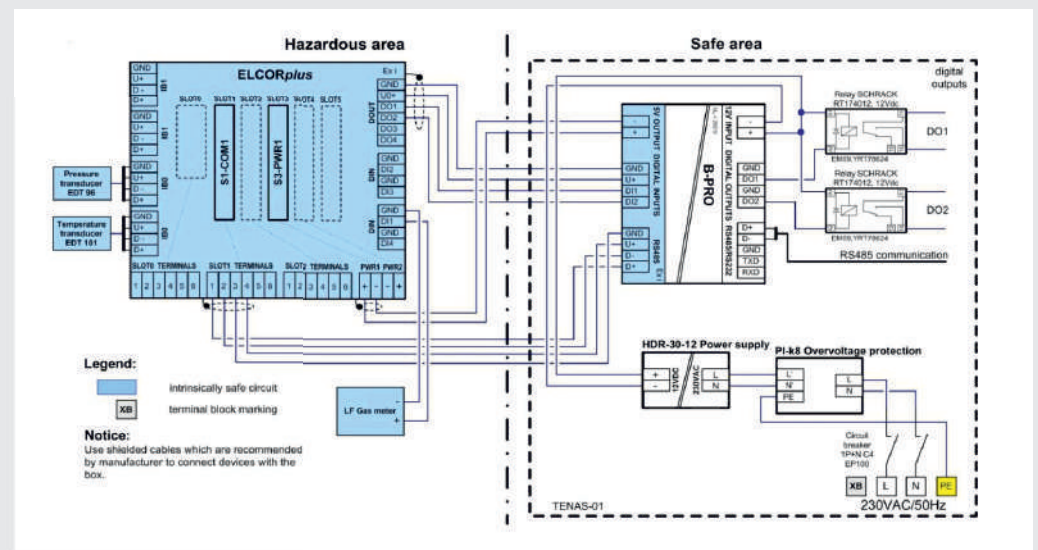


CLO

- module of current loop 4-20mA
- for ELGAS volume correctors and dataloggers
- installation in a non-Ex areas
- 35 mm DIN rail mounting



Module of current loop 4 - 20 mA


CLO module is a converter of digital signal to a 4-20 mA current output. The module can be connected to the digital outputs of ELGAS volume correctors or dataloggers. With CLO module the corrector or datalogger generates a continuous current output, which is proportional to the measured analogue quantities (e.g. pressure, temperature, flow). Several CLO modules can be connected to one device (depending on the number of digital outputs of the corrector/datalogger). The module has to be connected to the volume correct via safety barrier!

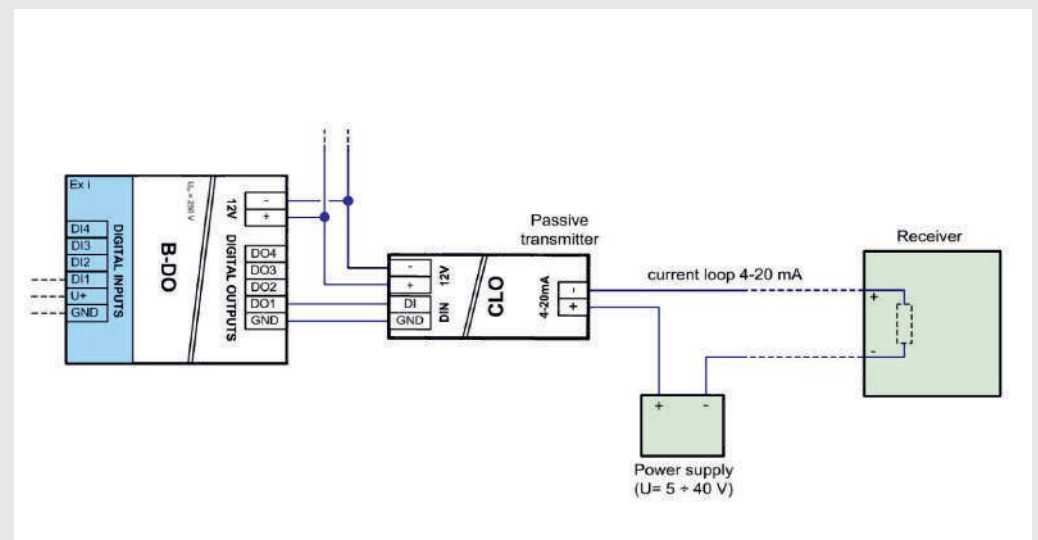

SRM, B-IB

Solar charge controller

The SRM solar controller is used to permanently charge a 12 V lead VRLA accumulator either from a solar panel or from a DC power source. Its main use is to provide a back-up external 12 V power supply for the corrector and the attached accessory modules. The SRM controller can be connected to the corrector using a standard RS485 interface. As an additional extension, the SRM includes 2 LF digital inputs, 2 LF digital outputs and 1 semiconductor switch. The module exists in two variants, for lead acid or LiFePO4 accumulator.

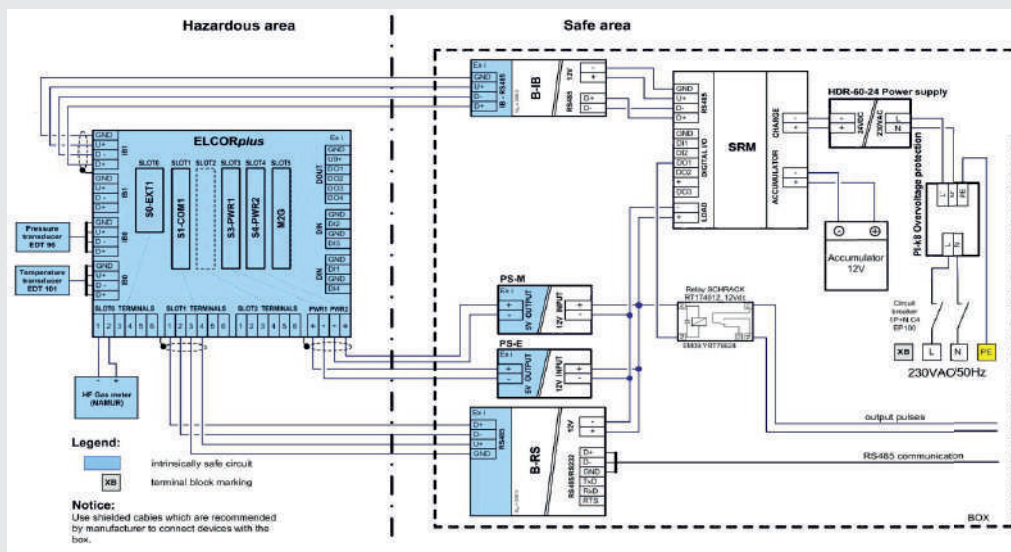


SRM

- solar charge controller
- variants for lead acid or LiFePO4 accumulator
- serial communication with connected EVC
- 2x digital inputs/outputs
- 35 mm DIN rail mounting
- supply voltage range 19 - 28V DC



Communication separator for internal bus

The purpose of this communication separator is to create an interface between internal bus RS485 of the volume corrector and other circuits that are placed outside the hazardous area - typically SRM charger. The device performs function of an intrinsically safe separator for the internal intrinsically safe communication bus of the corrector. Thanks to its use, RS485 communication equipment (e.g. SRM controller module) can be easily connected to the volume corrector or datalogger.

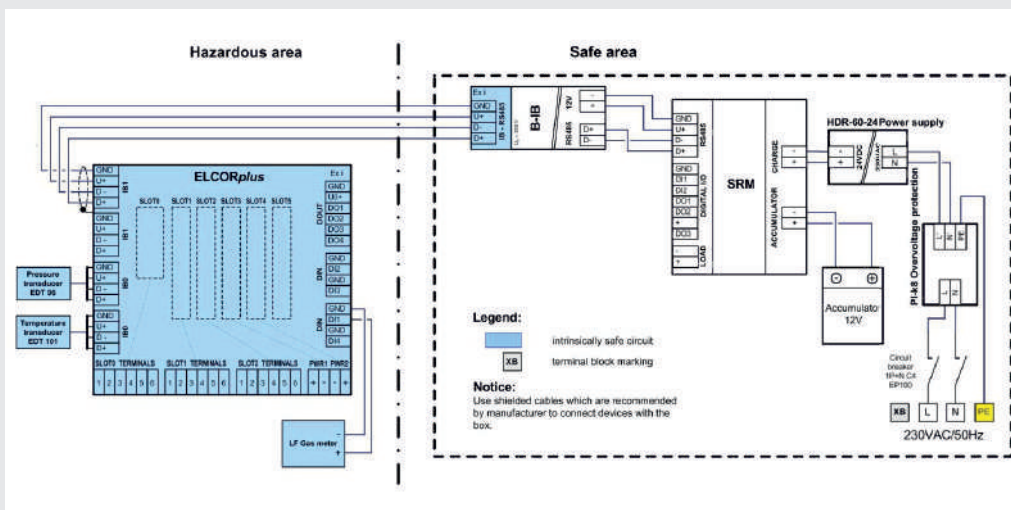

B-IB

- barrier for internal bus
- typical use with SRM module
- RS485
- 35 mm DIN rail mounting
- supply voltage range 10.5 - 15V DC



picoELCOR-2



Highlights

- All-in-one solution
- Integrated PTZ volume conversion
- High accuracy and stability of measurement
- Embedded modem - 2G or 4G (cat1/M1/NB)
- Magnetic field resistant
- MID and ATEX approved
- Designed for hazardous area ZONE 1
- Pulse output
- Long battery life
- Sizes G10, G16, G25

picoELCOR-2 is a SMART diaphragm gas meter which integrates the electronic index, volume conversion, datalogger and GPRS or LTE modem with mechanical diaphragm gas meter body.

Solid mechanical design, proven technology and use of the latest low power microprocessor technology with high processing power brings to customer guarantee of smooth functioning and space for future software and hardware extensions.

The volume measurement principle is based on measuring of gas flowing through mechanical units. Each unit has four measuring chambers, separated by synthetic diaphragms. The mechanical movement is transferred via gears to a crankshaft moving the valves.

Rotating movement is scanned by tamper proof optical element. This optical element ensures maximum protection against an external magnetic fields helping to eliminate tampering of the meter.


The base volume is calculated on the basis of precise measurement of the pressure, temperature and using conversion formula. Pressure and temperature transducer is integrated into the gas meter body.

The electronic index with LCD display, controlled by two button keypad (accessible after opening of the front cover) gives the information about measured volume and offers user friendly interface to the customer for reading of data.

The integrated battery powered GPRS or LTE modem transfers the collected data via cellular network. The LTE modem is available in variants LTE-Cat1 and LTE-Cat NB.

Power supply is realized by two separate lithium batteries (EVC battery and modem battery) enabling to power the device for up to 15 years (metrological part).

Generation *4* you

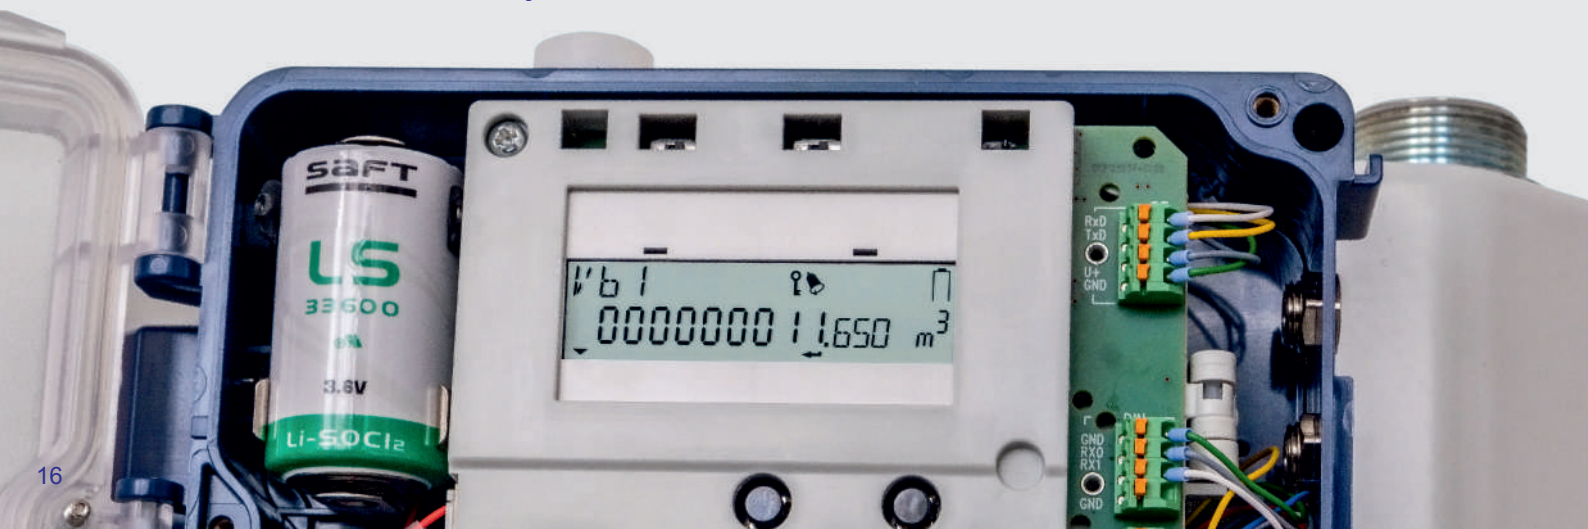

Technical specifications

General

Protection class	IP 65 (EN60529)
Working temperature	-25°C to +55°C
Control panel	2 button keypad shielded by the front cover
Display	Alphanumeric multisegment LCD with icons, always ON
Measuring temperature range	-25°C to +55°C
Measuring pressure range	0.8 -1.6 bar (absolute)
Total accuracy (MPE)	1.5 %
Communication interface	optical interface (IEC 62056-21) modem GPRS or LTE-Cat 1 or LTE-Cat M1 or LTE-Cat NB
Digital outputs	1 digital output - pulse, binary or analog output (CLO module is required for the analog output 4-20mA)
Battery power supply (metrology)	1x lithium battery (D cell), SAFT LS33600 battery life >15 years in defined conditions
Battery power supply (modem)	GPRS: HBL-03 or HBL-03U lithium battery pack (SAFT LS33600), up to 8 years battery life LTE Cat 1: HBL-04U lithium battery pack (SAFT LS26500), up to 5 years battery life LTE Cat NB: 1x or 2x SAFT LS 17500 (A cell), up to 7 or 12 years battery life
Metrological type approval MID 2014/32/EU, EN 1359, EN 12405-01	TCM 143/22 - 5864
ATEX approval 2014/34/EU Classification (EN 60079-0, EN 60079-11, EN 13463-1, EN 13463-5)	FTZÚ 22 ATEX 0047X Ex II -/2 G IIB T4 Ex II -/2 G IIB T3 (modem LTE Cat1)

Flow rates


	Qmin [m³/h]	Qmax [m³/h]	V [dm³]
	operating conditions = base conditions		
picoELCOR-2 G10	0.1	16	6 (5.6)
picoELCOR-2 G16	0.16	25	6 (5.6)
picoELCOR-2 G25	0.25	40	12 (11.2)

Dimensions and weight

	Dimensions [mm]					Weight [kg]
	A	B	C	D	E	
picoELCOR-2 G10	280	393	345	92	252	6.9
picoELCOR-2 G16	280	393	345	92	252	6.9
picoELCOR-2 G25	335	456	361	141	352	11.2

Connection

	DN	Thread
picoELCOR-2 G10	25	1 1/4"
	40	2"
picoELCOR v.2 (v.3) G16	40	2"
picoELCOR v.2 (v.3) G25	50	2 1/2"

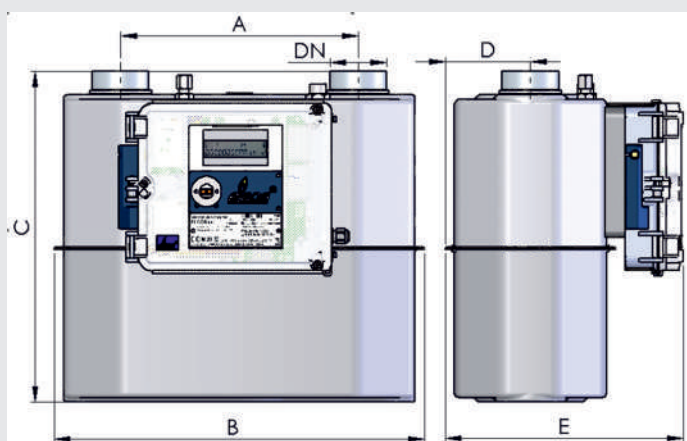

...get the best from ELGAS longtime experience

TRZ, EQZ, EQZK



Highlights

- Sizes DN (40) 50-100 G 16-400
- Accuracy +/- 1% (TRZ), +/- 1.5% (EQZ/K)
- Self lubricated longlife bearings
- Designed for easy replacement
- Optional over-run brake

...concept with advantages

ELGAS radial-blade turbine meter is a velocity meter designed for industrial and commercial use.

Radial-blade turbine gas meter

- Meter sizes G/Q from 16 up to 400
- Measuring range from 3 up to 650 m³/h
- There is a solution for each demand

Over-run brake (optional)

- Suppression of after-run error at intermittent operation without restriction of the measuring range
- For TRZ and EQZ only

Monopipe adaptor EAS

- Component of the pipeline
- Flange connection DN 50 – DN 100
- Thread connection G 1½" and G 2"
- The monopipe adaptor can be installed into the pipeline in advance with an over flow cap or lid cap

Installation and maintenance

- Can be installed in any position from horizontal to vertical
- Simple exchange of the meters on site. The heavyweight monopipe adaptor remains in the pipeline
- The disconnection of the meter and monopipe adaptor allows a tension-free meter installation

Why an over-run brake?

Axial-blade turbine or radial-blade turbine gas meters are most often used for measuring consumption of heating gas supply systems. All turbine meters of this construction are based on the principle of velocity measurement. The advantages of the radial blade turbine gas meter are mainly to be found in its simple installation, small size,



Radial-blade turbine gas meter head



Over-run brake (optional)



Monopipe adaptor EAS


light weight, in any installation arrangement and low cost. However gas meters with the velocity measuring principle are not ideal for intermittent operation. When an energy consuming installation is suddenly switched off, the meter does not react immediately. The freely moving turbine wheel continues to rotate at a slowly decreasing speed and will produce an error. In such case this error can be eliminated by installation of over-run brake.

Radial-blade turbine gas meter TRZ

Technical characteristics

- Principle of velocity measurement
- For measurements requiring obligatory verification (for MID versions)
- Accuracy:
 - from $0.2Q_{\max}$ to $Q_{\max}$... $\pm 1\%$
 - below $0.2Q_{\max}$... $\pm 2\%$
- Sizes G 16 up to G 400
- Dimensions DN 50, 80 and 100
- Different G-sizes per nominal width:
 - DN 50: G 16 up to G 100
 - DN 80: G 65 up to G 250
 - DN 100: G 160 up to G 400
- Operating pressure max. 6 bar
- Measuring head can be calibrated without monopipe fitting
- The counter is in a gas-free space
- High measurement stability and operational security due to high-quality, wear-resistant components
- Self-lubricating ball bearings
- Pressure extraction connection inside the meter
- Designed for simple servicing (measurement-cartridge principle)
- LF-pulse generator (in standard)
- Integrated flow strainer
- Short straight inlet lengths (2 x DN)
- Operation temperature range:
 - gas temperature from -10°C up to $+60^{\circ}\text{C}$ ($+55^{\circ}\text{C}$)
 - ambient temperature from -10°C up to $+60^{\circ}\text{C}$

Schematic sectional view of the Radial-Blade Turbine Gas Meter

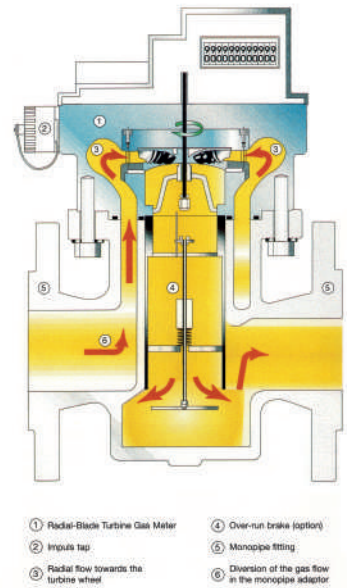

Options

- Over-run brake: Mechanical over-run brake not influencing the measuring range for intermitting operation
- Pulse generators:
 - 2nd LF-REED, it can be retrofitted without breaking the verification seal
 - MF-NAMUR
- Temperature sensor pockets in monopipe fitting

Standards and approvals

- International/national type approval MID TCM 143/13-5110
- EC registration certificate

Mounting and maintenance

- Mounting/dismounting of the measuring head is possible without disconnecting the monopipe fitting from the pipe. The measuring head itself is not influenced by the tension from the pipeline
- Gas meter can be installed in any position from horizontal to vertical (turbine axis not suspended and roller counter axis always horizontal)

Generation 4 you

Radial-blade turbine gas meter EQZ and EQZK

Technical characteristics

- Principle of velocity measurement
- For measurements not requiring obligatory verification
- Accuracy:
 - from 0.2Q_{max} to Q_{max} ... +/-1.5 %
 - below 0.2Q_{max} ... +/- 2 %
- Sizes Q 16 up to Q 400
- Dimensions DN 40, 50, 80 and 100
- Different Q-sizes per nominal width:
 - DN 40: Q 16 up to Q 65
 - DN 50: Q 16 up to Q 100
 - DN 80: Q 65 up to Q 250
 - DN 100: Q 160 up to Q 400
- Operating pressure max. 6 bar
- Measuring head can be calibrated without monopipe fitting
- Pressure extraction connection inside the meter
- High measurement stability and operational security due to high quality, wear-resistant components
- Self-lubricating ball bearings
- Counter is in a gas-free space
- Designed for simple servicing (measurement-cartridge principle)
- Standard integrated flow strainer
- Short straight inlet lengths (2 × DN)
- Operation temperature range:
 - gas temperature -10°C up to +60°C
 - ambient temperature -10°C up to +60°C

Options

- Over-run brake:
Mechanical over-run brake not influencing the measuring range for intermitting operation (only for EQZ)
- Pulse generators:
 - LF-REED
 - 2nd LF-REED
 - MF-NAMUR
- Temperature sensor pockets in monopipe fitting



Mounting and maintenance

- Mounting/dismounting of the measuring head possible without disconnecting the monopipe fitting from the pipe. The measuring head itself is not influenced by the tension from the pipeline
- Gas meter can be installed in any position from horizontal to vertical (turbine axis not suspended and roller counter axis always horizontal)

Standards and approvals

- Developed and produced according to Quality Standard ISO 9001:2008
- EC registration certificate CE 0085

EQZK - special features

- Special version for measuring of sewer gas and biogas (without verification)
- Internal surface protected against corrosion with PTFE (Teflon).
- Wear-resistant ceramic ball bearings
- Calibration without fitting disassembly
- All components of have a surface treatment for passive corrosion protection
- Limited warranty of durability due to chemical factors as:
 - hydrogen sulphide
 - ammonia
 - humidity
 - dirt
- The sewer gas meter EQZK may not be used upstream the gas-storage unit
- The gas should be filtered before it flows to the meter
- The meter should not be installed at the lowest point of an installation in order to avoid any accumulation of condensate inside the meter
- In case of strong condensation a condensate drain should be provided upstream and downstream the meter




Radial-blade turbine gas meter TRZ

		Load range		Max. operating pressure	Pulse generators		
DN [mm]	G-value	Q _{min} [m³/h]	Q _{max} [m³/h]	P [bar]	LF (standard) [imp/m³]	2nd LF (option) [imp/m³]	MF (option) [imp/m³]
50	G 16	5	25	6	1	1	0.01
50	G 25	4	40	6	1	1	0.01
50	G 40	6	65	6	1	1	0.01
50	G 65*	5	100	6	1	1	0.01
50	G 100*	8	160	6	1	1	0.01
80	G 65	10	100	6	1	1	0.01
80	G 100	16	160	6	1	1	0.01
80	G 160*	13	250	6	1	1	0.01
80	G 250*	13	400	6	1	1	0.01
100	G 160*	13	250	6	1	1	0.01
100	G 250*	20	400	6	1	1	0.01
100	G 400*	20	650	6	1	1	0.01

* Available in MID version with obligatory verification.

Radial-blade turbine gas meter EQZ and EQZK

		Load range		Max. operating pressure	Pulse generators		
DN [mm]	G-value	Q _{min} [m³/h]	Q _{max} [m³/h]	P [bar]	LF (option) [imp/m³]	2nd LF (option) [imp/m³]	MF (option) [imp/m³]
40/50	G 16	3	25	6	1	1	0.01
40/50	G 25	4	40	6	1	1	0.01
40/50	G 40	5	65	6	1	1	0.01
40/50	G 65	6	100	6	1	1	0.01
50	G 100	10	160	6	1	1	0.01
80	G 65	10	100	6	1	1	0.01
80	G 100	12	160	6	1	1	0.01
80	G 160	15	250	6	1	1	0.01
80	G 250	20	400	6	1	1	0.01
100	G 100	13	160	6	1	1	0.01
100	G 160	15	250	6	1	1	0.01
100	G 250	20	400	6	1	1	0.01
100	G 400	25	650	6	1	1	0.01

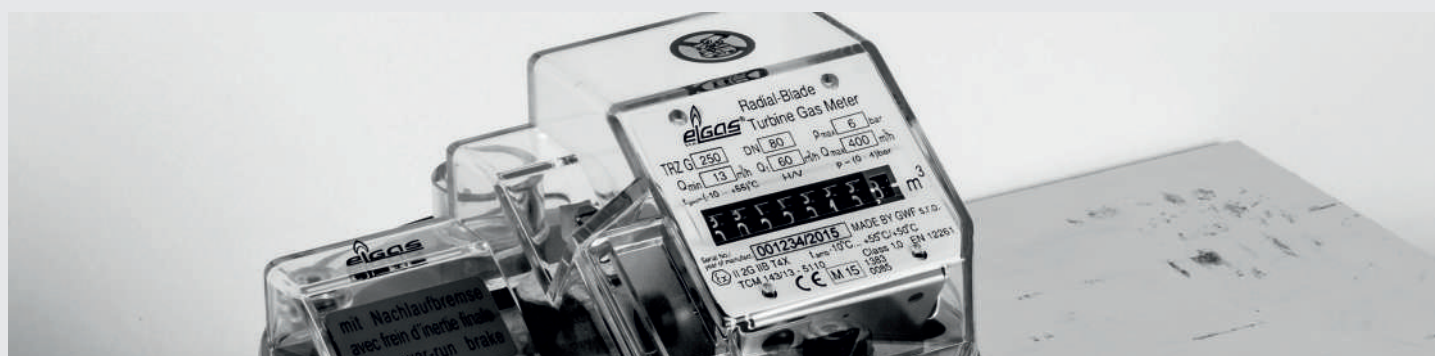

EMT-Lx and EMT-S series


Highlights

- EMT-Lx DN 50-300 G 65-6500 PN 16-64/ ANSI 150-600
- EMT-S DN 80-200 G 100-1600 PN 16-64/ ANSI 150-600
- Accuracy +/-1%
- Compliant with MID or OIML
- Removable cartridge
- Light aluminum bodies till DN 200



Introduction

The EMT-Lx series turbine meters are robust meters, designed to perform on the highest level of accuracy. The EMT-S turbine meters have similar features as EMT-Lx series, with its unique design of smallest possible installation length. The meters comply with all international standards and are approved for custody transfer. The actual flow sensor, an exchangeable cartridge, has a build-in multi stage flow conditioner enabling the meter to be installed without any straight in- and outlet sections in the case of EMT-Lx, or 1x DN in the case of EMT-S. All tested and proved according perturbation test as per international standards.

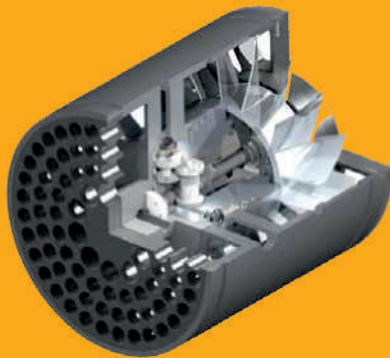

The cartridge can be pre-calibrated, under both low and high pressure conditions, and then exchanged on-site. The cartridge is supported in O-rings and isolated from the body, hence unaffected by any influences of the housing. The short length cartridge enables the use of larger sized cartridges than the size of the meter body. The approved maximum capacities of this kind of meters are extremely high and similar to the capacities of ultrasonic meters.

To reduce transportation cost, optimize the corrosion protection and improve safety in handling, the EMT-Lx series of turbine meters up to 6" (DN150) and complete EMT-S series are also available with low weight aluminum meter bodies.

Applications

The standard turbine meters are suitable for custody transfer gas measurement of all non-corrosive gases such as natural gas, propane, butane, air, nitrogen, hydrogen, etc. for low and high operating pressures. Special constructions can be supplied for use under extreme condition like high temperatures or corrosive gases. The EMT-Lx can be modified to perform as a master meter or transfer master meter.

For flange ratings up to ANSI150 and PN16, the body is available in aluminium (steel on request). Due to the extremely low weight of these aluminium bodies, the meter can be transported easily and exchanged without special equipment.

Larger sizes or higher pressure ratings up to 24" ANSI600 are available in steel on demand.



Main features

- Flow range of EMT-Lx: 10 - 10 000 m³/h, for EMT-S: 8 - 2 500 m³/h
- Diameters of EMT-Lx: DN 50 – DN 300 (2" - 12"), EMT-S: DN 80-DN 200 (3" - 8")
- Pressure rates PN 10 - 64, ANSI 150 – 600
- Accuracy:
0,2 Q_{max} to Q_{max}: ± 1%
Q_{min} to 0,2 Q_{max}: ± 2%
- Repeatability: better than 0,1%
- Mounting position: Horizontally or vertically
- Compliant with: EN12261:2002
EN12261:A1-2006
OIML R137 1&2 (2014)
MID 2014/32/EU
- Temperature Range:
ATEX: -25°C to +70°C
MID: -25°C to +70°C (lower temperatures on request)
PED: -20°C to +70°C (lower temperatures on request)

- Length 3x DN for EMT-Lx, short length 1x DN for EMT-S
- Removable meter cartridge
- No straight inlet/outlet sections required for EMT-Lx, 1 x DN straight inlet section required for EMT-S
- Lifetime self-lubricated bearings in small sizes up to 6" (oil pump as optional)
- Multipurpose exchangeable index
- Tamper proof IP67 sealed index
- Seals according EN 549 (seals for gas appliances and gas equipment)
- ATEX approvals:
Sensors compliant with Ex ia IIC T4...T6 Gb (-40°C ≤ Ta ≤ +70°C)
Encoder compliant with Ex ib IIB T3... T6 Gb (-25°C ≤ Ta ≤ +55°C)
- Body: Compliant to Pressure Equipment Directive 2014/68/EU



Index

The basic index consists of an UV-resistant polycarbonate cover, glued (IP67) to an aluminum frame. The aluminum frame will give strength to the index and as such sufficient protection against mechanical interference (Tampering). The index can be rotated over 350° to all directions. The index can be equipped with multiple LF switches (Reed or Wiegand principle), "Normally Closed" tamper contacts and encoder technology. The LF pulsers and its driving magnet are shielded to overcome tampering with an externally applied magnetic field. Magnetic fields up to 500 mT will not have an effect on the pulse counting. The index or instrument drive can be equipped with several options making the meter prepared for the future:

Wiegand pulsers:

The Index can be equipped with multiple Wiegand pulsers. The Wiegand pulsers do have significant advantages over the traditionally used Reed contacts. Wiegand sensors do not face "bouncing" problems and the actual live time is not limited as much as the traditional Reed contacts.

Intelligent index/encoder:

The index can be equipped with an intelligent encoder. The encoder sends out the total volume with an interval of 400 msec. The encoder uses a standard NAMUR serial data format, and can be modified to special applications on request. The encoder is powered by one AA cell battery guaranteed for 12 years of operation. Two AA cells can be installed on request for a guaranteed life time of 20 years. The encoder is equipped with a special Hall sensor to detect and register interferences from external magnets. Several programmable inputs/ outputs are available for advanced – anti fraud – functions.

Heavy duty bearings

Since gas pressure causes the main force on the bearings the both series incorporates bearings dedicated to the working pressure. Turbine meters which have a low working pressure are equipped with lighter bearings then the meters which are used at higher working pressures. This way the best measuring ranges and life times can be guaranteed.

Lubrication

The turbine meters can be equipped with several types of lubrication systems or with lifetime lubrication. ELGAS recommends to use the lubrication system. An integrated splash vane will distribute the oil to all the moving parts and will flush the bearings. The EMT-Lx and EMT-S series incorporates high quality precision bearings. For optimal lifetime guarantees it is recommended they should be lubricated and clean. Recommendations as to when to lubricate turbine meters varies by product type, operating conditions, customer procedures, and regulatory requirements. Meter performance is optimized by flushing contamination from the bearings and refreshing or adding of oil during operation.



High frequency sensors

Turbine meters can be equipped with several types of high frequency sensors.

HF main shaft: this high frequency sensor generates two independent phase shifted signals and as such the flow direction can be monitored. The generated signal complies with NAMUR.

HF turbine wheel: this HF sensor can be used to check the condition of the turbine wheel (missing blades) by comparing the pulses with the HF main shaft.

For both sensors, the electrical separation between the hazardous and non-hazardous areas is accomplished by an intrinsically safe insulation amplifier.

Materials

Body (Standard): Low weight aluminum / steel

Bearings: Stainless steel

Body (Optional): Low temperature steel

Shafts: Stainless steel

Cartridge: Aluminum

Gears: POM

Straightening vane: Aluminum

Index frame: Aluminum

Turbine wheel: Aluminum

Index frame: Polycarbonate ECI

Bearing block: Stainless steel / aluminum

Technical specifications

Axial turbine gas meters EMT-Lx series

Size	G-value	Qmax	Qmin
DN [mm]	[-]	[m³/h]	Atm. Air [m³/h]
50	G65	100	10
	G100	160	8
	G160	250	13
	G250*	400	20
80	G65	100	10
	G100	160	8
	G160	250	13
	G250	400	20
100	G400*	650	32
	G65	100	10
	G100	160	8
	G160	250	13
	G250	400	20
	G400	650	32
150	G650*	1000	50
	G1000*	1600	80
	G160*	250	13
	G250*	400	20
	G400	650	32
	G650	1000	50
200	G1000	1600	80
	G1600*	2500	125
	G400*	650	32
	G650	1000	50
	G1000	1600	80
	G1600	2500	125
250	G2500*	4000	200
	G650*	1000	50
	G1000	1600	80
	G1600	2500	125
300	G2500	4000	200
	G4000*	6500	320
	G1000*	1600	80
	G1600	2500	125
	G2500	4000	200
300	G4000	6500	320
	G6500*	10000	500

ΔP [NG]**	LF	HF Main***	HF Wheel***	Dimensions				Weight [kg]			
[Pa]	[imp/m³]	[imp/m³]	[imp/m³]	C [mm]	E [mm]	H [mm]	L [mm]	PN10/16 ANSI150 ALU	PN10/16 ANSI150 STEEL	PN25/40 ANSI300 STEEL	PN64/100 ANSI600 STEEL
900	10	18440	64540	155	As per flange dimension	175	150	8	17	17	17
900	1	22560	67657	155		175	150	8	17	17	17
1600	1	8235	28815	155		175	150	8	17	17	17
1600	1	5180	20705	155		175	150	8	17	17	17
900	10	1845	64540	144		178	240	9	22	24	27
900	1	22560	67675	144		178	240	9	22	24	27
900	1	8235	28815	144		178	240	9	22	24	27
1600	1	5180	20705	144		178	240	9	22	24	27
1600	1	2340	9350	144		178	240	9	22	24	27
900	10	18440	64540	156		190	300	15	34	41	48
900	1	22560	67675	156		190	300	15	34	41	48
900	1	8025	24065	156		190	300	15	34	41	48
900	1	3915	13700	156		190	300	15	34	41	48
900	1	2340	9350	156		190	300	15	34	41	48
1600	1	2950	5165	156		190	300	15	34	41	48
1600	0.1	1435	2865	156		190	300	15	41	-	-
900	1	8025	24065	180		213	450	27	61	79	98
900	1	3915	13700	180		213	450	27	61	79	98
900	1	4475	6715	180		213	450	27	61	79	98
900	1	2950	5165	180		213	450	27	61	79	98
1600	0.1	1435	2865	180		213	450	27	61	79	98
1600	0.1	885	1770	180		213	450	-	73	-	-
900	1	4475	6715	185		243	600	-	75	99	133
900	1	2950	5165	185		243	600	-	75	99	133
900	0.1	1435	2865	185		243	600	-	75	99	133
900	0.1	885	1770	185		243	600	-	75	99	133
900	0.1	440	1310	185		243	600	-	90	-	-
900	1	2950	5165	236		282	750	-	200	236	315
900	0.1	775	2320	236		282	750	-	200	236	315
900	0.1	440	1310	236		282	750	-	200	236	315
900	0.1	440	1310	236		282	750	-	200	236	315
1600	0.1	245	740	236		282	750	-	240	-	-
900	0.1	775	2320	236		283	900	-	240	285	365
900	0.1	440	1320	236		283	900	-	240	285	365
900	0.1	245	740	236		283	900	-	240	285	365
900	0.1	245	740	236		283	900	-	240	285	365
1600	0.1	125	370	236		283	900	-	290	-	-

* Approved on request

** ΔP is measured under atmospheric conditions with natural gas with relative density of 0.6 (air = 1)

*** Values may vary 5% due to machining tolerances

Technical specifications

Axial turbine gas meters EMT-S series



Size	G-value	Qmax	Qmin	ΔP [NG]*	LF	HF Main**	HF Wheel**
DN [mm]	[-]	[m³/h]	Atm. Air [m³/h]	[Pa]	[imp/m³]	[imp/m³]	[imp/m³]
80	G100	160	8	900	10	21845	64540
	G160	250	13	900	1	22560	67675
	G250	400	20	900	1	8235	28815
100	G160	250	13	900	1	8025	24065
	G250	400	20	900	1	3915	13700
	G400	650	32	900	1	2340	9350
150	G400	650	32	900	1	4475	6715
	G650	1000	50	900	1	2950	5165
	G1000	1600	80	1600	0.1	1435	2865
200	G650	1000	50	900	1	2950	5165
	G1000	1600	80	900	0.1	1435	2865
	G1600	2500	125	1600	0.1	885	1770

Dimensions

Size	G-value	Dimensions EMT-S (Flanged)								Dimensions EMT-S (Wafer)					
DN [mm]	[-]	C [mm]	E [mm]	H [mm]	L [mm]	ALU [kg] <21bar	STEEL [kg] <21bar	STEEL [kg] <51bar	STEEL [kg] <101bar	C [mm]	E [mm]	H [mm]	L [mm]	ALU [kg]	STEEL [kg]
80	G100	175	95	175	120	8	27	27	27	175	95	178	120	7	13
	G160	175	95	175	120	8	27	27	27	175	95	178	120	7	13
	G250	175	95	175	120	8	27	27	27	175	95	178	120	7	13
100	G160	192	112	185	150	11	47	47	55	192	112	190	150	8	15
	G250	192	112	185	150	11	47	47	55	192	112	190	150	8	15
	G400	192	112	185	150	11	47	47	55	192	112	190	150	8	15
150	G400	212	138	212	175/180	19	79	79	102	212	138	213	175/180	12	25
	G650	212	138	212	175/180	19	79	79	102	212	138	213	175/180	12	25
	G1000	212	138	212	175/180	19	79	79	102	212	138	213	175/180	12	25
200	G650	243	168	238	200	26	86	112	152	243	168	243	200	15	35
	G1000	243	168	238	200	26	86	112	152	243	168	243	200	15	35
	G1600	243	168	238	200	26	86	112	152	243	168	243	200	15	35

* ΔP is measured under atmospheric conditions with natural gas with relative density of 0.6 (air = 1)

** Values may vary 5% due to machining tolerances

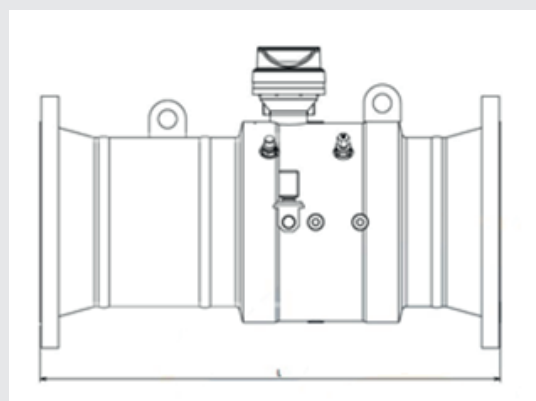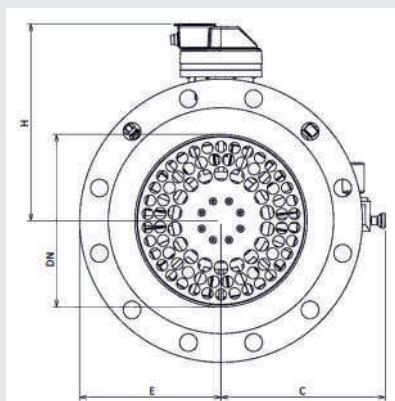

EMR series

Highlights

- Sizes DN 40-150 G 10-650 PN 16-100/ANSI 150-600
- Measuring range up to 1:160
- Accuracy 1%
- Compliant with MID or OIML
- Robust and reliable design
- Aluminum body for PN 16/ANSI 150



Introduction

The ELGAS series of rotary gas meters are designed to meet the highest demands of reliable and accurate measurement and OIML R137 1&2 (2014). The compact exchangeable aluminum cartridge allows local repair and on-site cleaning. The robust design of the casing and the cartridge make the meter less sensitive to installation stresses caused by the connecting piping. A significant amount of misalignment of the connecting piping/flanges can be tolerated by the meter without affecting the meter performance by jamming the impellers.

The aluminum casing of the EMR (body and front plate) is designed for working pressures up to 20 barg with a safety factor of 4. The square impellers and the improved position of the main bearings and shafts, make the meter less sensitive to overload and pressure shocks. The aluminum index and the protection of the LF pulsers with the associated magnets, make the meter less sensitive to manipulation by externally applied magnets or other external forces.

Tampering of meters with strong neodymium magnets is one of the major concerns of utility companies, as this kind of manipulation is very difficult to detect or prove. In order to protect the meter, the index can also be equipped with an intelligent encoder.

The unique proprietary oiling system, where the oil is distributed directly to the timing gears by means of a disc, eliminates oil loss at high rotor speeds and will lubricate the timing gears at very low loads. All plugs and oil sight glasses are in the front of the meter, allowing the meter to be installed in very compact installations.

The EMR series of rotary meters is suitable for custody transfer gas measurement of all non-corrosive gases such as natural gas, propane, butane, air, hydrogen, etc. Special constructions can be supplied for use under extreme conditions like higher temperatures and corrosive gases.



Main features

- Flow range 0.5 – 650 m³/h
- Diameters DN 40 – DN 150 (6/4" – 6")
- Pressure rates PN 16 – 100, ANSI 150 – 600
- Accuracy:
 - Qt to Qmax: $\pm 1\%$
 - Qmin to Qt: $\pm 2\%$
- Repeatability: better than 0.1%
- Mounting position: Horizontally or vertically
- Compliant with: EN12480:2002
EN12480:2015
OIML R137 1&2 (2014)
MID 2014/32/EU
- Temperature Range:
 - ATEX: -25°C to +70°C
 - MID: -25°C to +70°C
(lower temperatures on request)
 - PED: -20°C to +70°C
(lower temperatures on request)
- Large rangeability
- Removable cartridge design
- Robust construction
- Multi position
- Square impeller technique
- Compact installation
- Easy local repair
- On-site cleaning
- Tamper proof exchangeable index
- Seals according EN 549
(seals for gas appliances and gas equipment)

Superior metrological performance


Meters are approved according to EN12480:2002, EN12480:2015 and OIML R137 1&2 (2014) for rangeabilities up to 1:160. In situations where the installation or gas conditions are severe, the risk of rejection is greater when recalibration is done against in-service tolerances. The designation of class 1.5 (instead of 1.0), while still maintaining the class 1.0 accuracy limits, could be of interest since the in-service tolerances of a class 1.5 meter are significantly larger than the class 1.0 tolerances.

Cartridge design

All EMR meters consist of an aluminum cartridge inserted in a meter body. The cartridge can be removed and inserted with the body remaining installed. This allows local repairs such as replacement of the main bearings and on-site cleaning to be carried out without removing the meter body. Particular owners of older networks, suffering from dirt and/or condensate, will benefit from the ability to remove the cartridge.

Robust construction

In the new cartridge EMR design, the impellers, timing gears and bearings are fixed and positioned by a synchroplate.

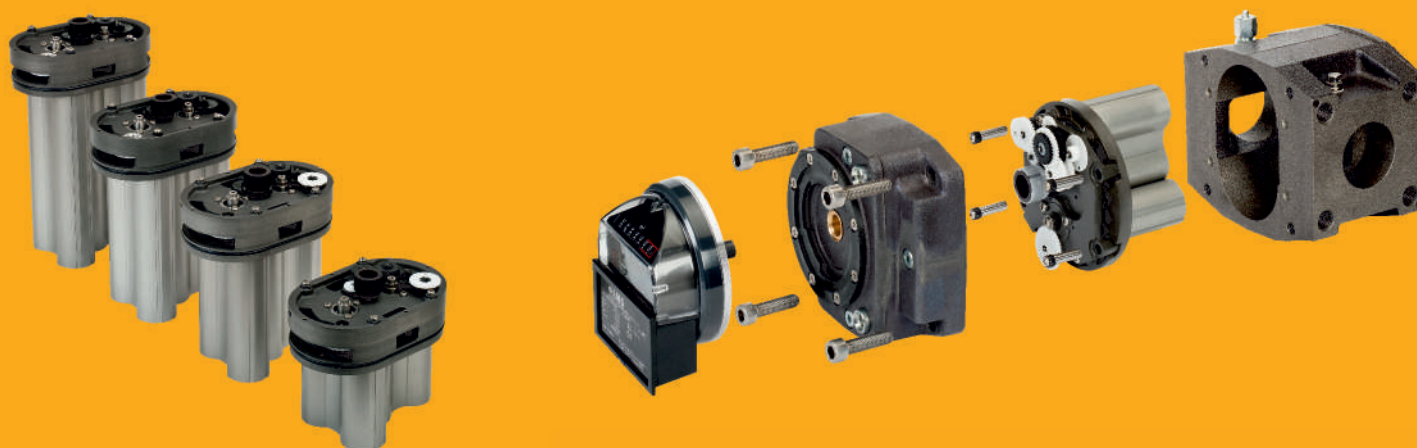

- ATEX approvals:
 - Sensors compliant with Ex ia IIC T4... T6 Gb
(-40°C ≤ Ta ≤ +70°C)
 - Encoder compliant with Ex ib IIB T3... T6 Gb
(-25°C ≤ Ta ≤ +55°C)
- Body: Compliant to Pressure Equipment Directive 2014/68/EU

Since this synchroplate is machined in one operation, the tolerances can be controlled and maintained at a very high level. As a consequence, the clearance between the impellers and the meter body is equally divided and as such maximized, making the meters less sensitive to dirt and debris.

The short impeller and high strength shaft connecting the timing gear to the impeller overcomes flexing or bending of the impellers, hence the meters are less sensitive to flow and pressure shocks. Severe intermittent on/off applications are typically handled without damage. Temporarily overloading the meter up to 50% of the maximum capacity will not cause any degradation of the metrological quality.


Basic Index (standard)

The basic index consists of a UV-resistant polycarbonate cover glued to an aluminum frame. The aluminum frame will give strength to the index and as such sufficient protection against mechanical interference (Tampering). The index is 100% sealed (IP67) by multiple layers of glue. The index can be rotated over 350° for flow directions right-left, left-right and top-down. The index is equipped with multiple LF switches and normally closed tamper contacts.

Universal Index

The extremely strong double walled, aluminum index is designed to withstand any external interference. To protect against large forces applied to the index window, an additional glass window is mounted beneath the polycarbonate window. This glass window will break in case excessive force is applied to the index.

On request the index can be sealed up to IP67. Four slots in the outer extrusion can be used for various add-ons such as multiple connectors, additional outgoing shafts, marking plates with bar codes, etc.

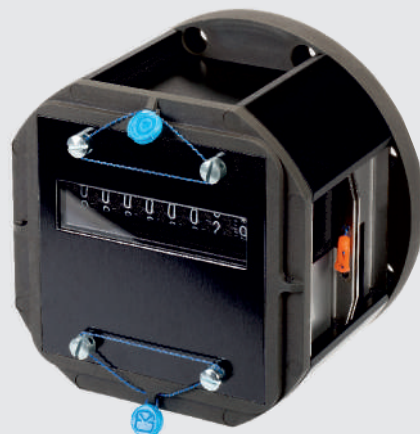

The rotation of the outgoing shaft is equal to one m³ or CF or (sub) multiple thereof. A single or double counter can be added to the instrument drive. The instrument drive can be rotated over 350°, hence allowing both horizontal and vertical installation. The instrument drive can be equipped with low frequency pulsers, an encoder as well as a reverse flow lock, preventing meters from registering backwards as a result of tampering. On request the index can be supplied as side reading (without instrument drive) allowing the meter to be installed in an extremely high or low position. The rotating direction of the output shaft can be changed on site.

Options for Indexes and Instrument Drive

The index or instrument drive can be equipped with several options making the meter prepared for the future:

- Magnetic Field Protection Reverse Flow Lock
- Wiegand Pulsers
- Intelligent Index/Encoder
- High Frequency Pulsers
- Tamper Proof

Installation

Installation of ELGAS rotary meters can be horizontal or vertical. Since the meter is designed for multi position, consideration need only be given to the arrows showing the flow direction. After the meter is installed, the index can be rotated to the correct position. The index can be rotated over 350°. ELGAS rotary meters can be metrological sealed to suit various conditions from total flexibility to highly tamper proof.



The use of slots makes the index multifunctional and as such “prepared for the future”.

Instrument Drive / Side reading

The instrument drive plate can be used to mount auxiliary equipment like chart recorders or mechanically driven volume correctors.

Maintenance

ELGAS rotary gas meters have a rotating disc for distributing the oil directly to the timing gears.

The mechanism is designed to prevent oil loss at high loads or from pressure variations and maintains sufficient oiling at low flows. Since the oil system operates between 40% and 120% of the maximum flow, sizing of the installation is no longer critical. The oil supplied with the meter is suitable for 10 years of operation under normal conditions.

Cleaning / Easy repair

After removing the front cover of the meter, the entire cartridge can be removed for cleaning. During this cleaning process, the meter body can remain in line. For cleaning purposes the seals of the front cover have to be removed. The construction of the ELGAS rotary gas meters allows local repair or replacement of all the main bearings without special tools. If the main bearings are to be replaced, the critical timing of the impellers will be maintained. It is recommended that replacement of the main bearings (mounted in the synchroplate) is performed by a skilled technician in a clean environment. The rear bearings can be replaced with the meter body on site. In a situation where a meter is locked by dirt, the cartridge can be removed for cleaning.

The use of a cartridge (pre-calibrated) and the accessibility of the front and rear bearings without the need for removing the timing gears, make the ELGAS series of rotary meter unique in terms of repair. Any repair shop can repair or re-condition the meters without special skills and tools. When regulation permits, a new, calibrated cartridge can be installed.

EVC mounting

ELGAS rotary meters can be equipped (optional) with two thermo wells and two pressure tapping points. Therefore the rotary meters can be supplied with an Electronic Volume Corrector (EVC). ELGAS offers a large variety in conversion devices so all required data can be provided and the best solution for every project can be assembled. Refer to the special brochure for more information about the Electronic Volume Conversion Devices ELGAS is able to supply or contact a local supplier.

Materials

Body: Aluminum	Shafts: Stainless steel
Impellers: Aluminum	Gears: Delrin
Cartridge: Aluminum	Index frame: Aluminum
Timing gears: Carbon steel	Index cover: Polycarb. ECI
Bearings: Carbon steel / stainless steel	

Integrated bypass (security of supply)


Rotary meters are used in a wide variety of industrial applications due to their reliability and accuracy over an extremely large range. Unlike other meter types such as turbine meters and ultrasonic meters, a rotary meter is always accurate unless the rotors become jammed.

In reality, the rotary meter is a digital device, it runs and is accurate or it stops. The only drawback of a rotary meter is that when it stops (locks up), the gas flow is interrupted. As such, there is no security of supply unless precautions are taken.


The most convenient and reliable precaution is to have an automatic bypass valve integrated in the meter. This provides security of supply as the bypass opens automatically when the differential pressure over the meter reaches a certain pre-set level (various springs for different set points are available).

The ELGAS series of rotary meters can be equipped with an automatic bypass (MID approved). The bypass operates as a "reverse" safety shut-off valve, whereby the bypass valve is triggered by an accurate spring loaded diaphragm. When operated, the opened bore allows the full flow of gas to bypass the locked impellers with a significantly lower pressure loss compared to spring loaded bypass systems.

Bypass closed

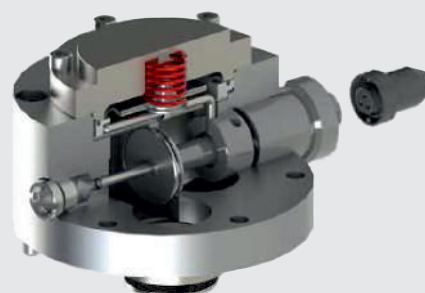

Bypass open

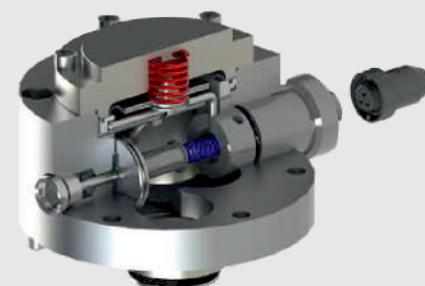

The mechanism in the bypass works on a high force level (large diaphragm and strong springs) and as such, the bypass is very reliable over its expected life time. With two reed switches (one normally closed, one normally open) the status of the valve can be monitored (e.g. by an EVC). It occasionally happens that an operator will open the inlet or outlet valves too fast and activate the bypass. In such a case, the bypass can be re-set onsite. A removable plug provides access to the reset mechanism. Note: In some countries local authorities require this plug to be sealed.

Technical specifications

	Performance							
Volume Vc [dm³]	G-value [-]	Qmax [m³/h]	Qmin*	Qt	Diameter	Pmax [bar]	ΔP** [Pa]	Basic Transfer*** [rev·m³]
			Atm. Air [m³/h]	Atm. Air [m³/h]	D [mm]			
0.25	-	-	-	-	-	-	-	-
	G10	16	0.5	1.6	Thr. 6/4"	21	20	4004.325
	G16	25	0.5	2.5	Thr. 6/4"	21	18	4004.325
	G25	40	0.5	4	Thr. 6/4"	21	120	4004.325
0.39	G10	16	0.65	1.6	40 or 50	21	12	2574.268
	G16	25	0.65	2.5	40 or 50	21	28	2574.268
	G25	40	0.65	4	40 or 50	21	72	2574.268
	G40	65	0.65	6.5	40 or 50	21	190	2574.268
0.61	G16	25	0.65	2.5	40 or 50	21	25	1638.163
	G25	40	0.65	4	40 or 50	21	64	1638.163
	G40	65	0.65	6.5	40 or 50	21	170	1638.163
	G65	100	0.65	10	40 or 50	21	400	1638.163
	G40	65	0.65	6.5	Thr. BSP 50	21	170	1638.163
0.97	G65	100	1	10	80	21	100	1023.851
	G100	160	1	16	80	21	258	1023.851
0.72	G16	25	0.65	2.5	40 or 50	21	13	1378.968
	G25	40	0.65	4	40 or 50	21	32	1378.968
	G40	65	0.65	6.5	40 or 50	21	85	1378.968
	G65	100	0.65	8	40 or 50	21	200	1378.968
	G100	160	1.6	16	50	12	512	1378.968
1.16	G40	65	1	6.5	80	21	80	861.8609
	G65	100	1	8	80	21	100	861.8609
	G100	160	1	16	80	21	258	861.8609
1.43	G100	160	1.6	16	80 or 100	21	240	689.4840
	G160	250	1.6	25	80 or 100	21	635	689.4840
3.17	G250	400	2.5	40	100	21	230	315.3520
5.13	G400	650	4	65	100	21	280	194.0625
	G250	400	4	40	150	21	106	194.0625
	G400	650	4	65	150	21	280	194.0625



* Wider range on request in given sizes

** ΔP is measured under atmospheric conditions with natural gas with relative density of 0.6 (air = 1)

*** Values may vary 5% due to machining tolerances

Dimensions

	G-value	Performance							
Volume Vc [dm ³]	G-value [-]	L	H	A		B [mm]	C		Weight ALU [kg]
		[mm]	[mm]	Univ. [m ³ /h]	Basic [mm]		Univ. [mm]	Basic [mm]	
0.25	-	-	-	-	-	-	-	-	-
	G10	150	163	234	182	33	166	149	5
	G16	150	163	234	182	33	166	149	5
	G25	150	163	234	182	33	166	149	5
0.39	G10	171	163	259	242	68	191	174	7
	G16	171	163	259	242	68	191	174	7
	G25	171	163	259	242	68	191	174	7
	G40	171	163	259	242	68	191	174	7
0.61	G16	150/171	163	259	242	68	191	174	7.5
	G25	150/171	163	259	242	68	191	174	7.5
	G40	150/171	163	259	242	68	191	174	7.5
	G65	150/171	163	259	242	68	191	174	7.5
	G40	171	163	259	242	68	191	174	7.5
0.97	G65	171	215	336	319	90	246	90	12
	G100	171	215	336	319	90	246	90	12
0.72	G16	171	202	268	251	72	196	179	12
	G25	171	202	268	251	72	196	179	12
	G40	171	202	268	251	72	196	179	12
	G65	171	202	268	251	72	196	179	12
	G100	171	202	268	251	72	196	179	12
1.16	G40	171	202	320	303	92	228	211	14
	G65	171	202	320	303	92	228	211	14
	G100	171	202	320	303	92	228	211	14
1.43	G100	171/241	202	371	354	118	253	236	15
	G160	171/241	202	371	354	118	253	236	15
3.17	G250	241	288	403	386	160	243	226	38/41
5.13	G400	241	288	403	501	218	300	283	48
	G250	241/260	288	518	501	218	300	283	48/51
	G400	241/260	288	518	501	218	300	283	48/51

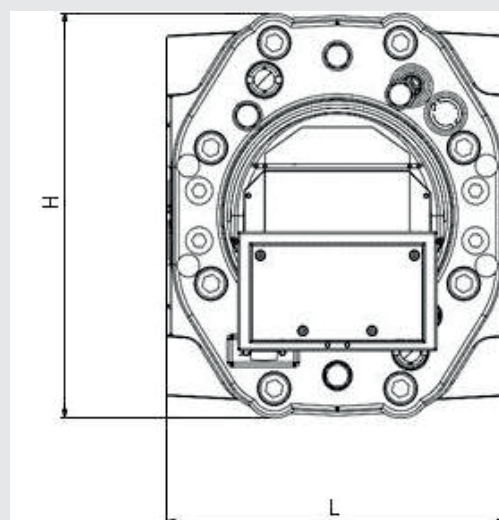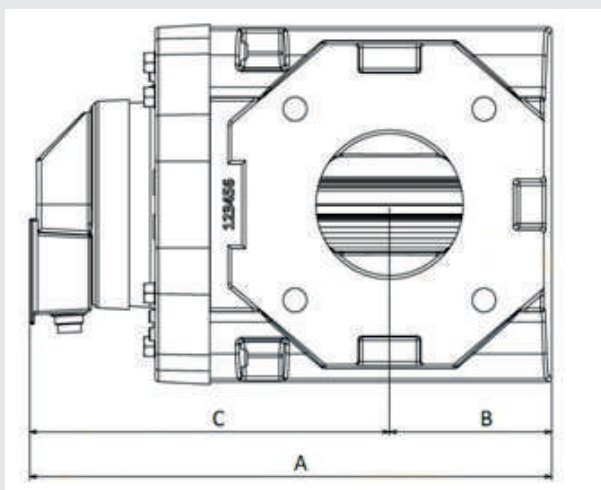


EMR HP 30 series for pressures up to 30 bar

The rotary meters are developed with an optimized body construction. Due to the special design and the strength of the aluminum construction the rotary meters can be used with higher pressures. Since this development has been done as an optimization for the standard aluminum bodies there is no need of a steel body for pressure up to 30 bar.





	Performance ANSI300					Dimensions ANSI300							
Volume Vc [dm³]	G-value [-]	Qmax [m³/h]	Qmin	Qt	Diameter	L [mm]	H [mm]	A		B [mm]	C		Weight ALU [kg]
			Atm.Air [m³/h]	Atm.Air [m³/h]	D [mm]			Univ. [mm]	Basic [mm]		Univ. [mm]	Basic [mm]	
1.16	G25	40	0.65	3.2	50	171	202	320	303	92	228	211	11
	G40	65	0.65	3.2	50	171	202	320	303	92	228	211	11
	G65	100	0.65	5	50	171	202	320	303	92	228	211	11
1.43	G100	160	1.6	3.2	80 or 100	241	202	371	354	118	253	236	15
	G160	250	2.5	5	80 or 100	241	202	371	354	118	253	236	15
5.15	G250	400	4	20	100	260	288	518	501	218	300	283	51
	G400	650	4	32	100	260	288	518	501	218	300	283	51

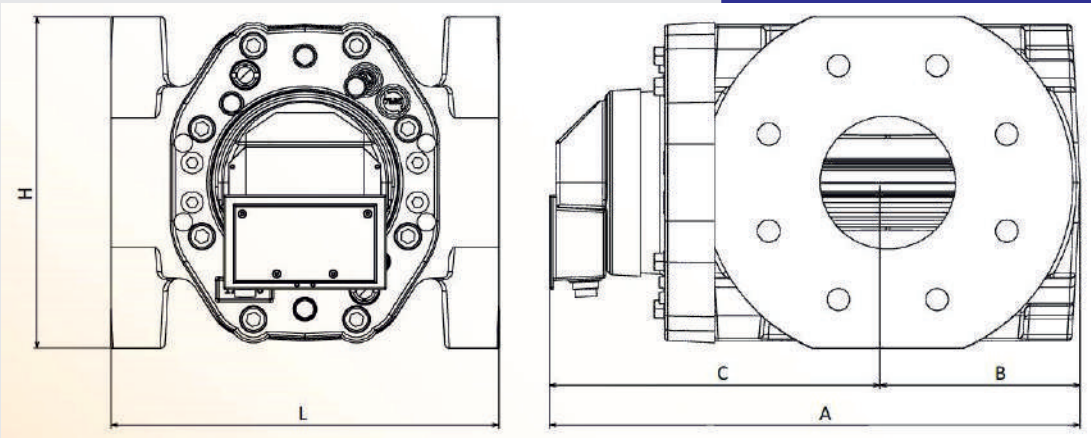

EMR Dual Series (pulsation free)

Turbine meters have a limited range and must preferably be calibrated close to the operating conditions (high pressure natural gas). This limitation and the higher costs due to the calibration, make the larger rotary meters more popular as replacement for the turbine meter. To overcome the drawback of conventional rotary meters (pulsations and resonance), pulsation free rotary meters have been developed. These pulsation free rotary meters, using two phase shifted pairs of impellers, fully eliminate the pulsations by countering the characteristic sine wave and its resultant resonance. As a result the pulsation free rotary meters series DUAL are extremely quiet and accurate.

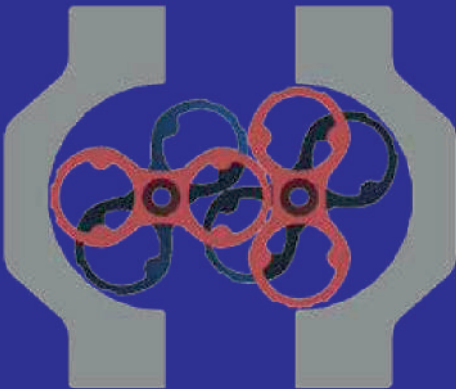

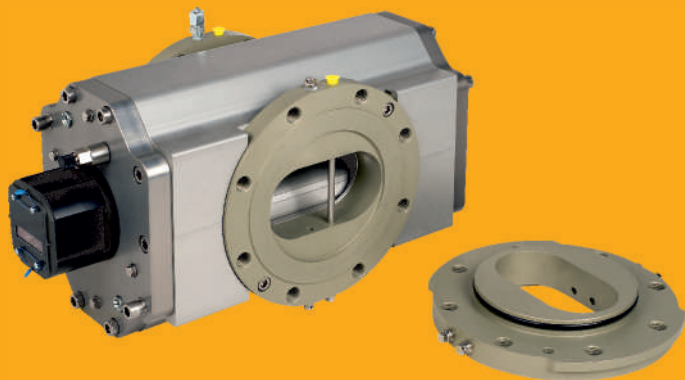

Another advantage is the use of relatively short impellers. Shorter impellers will not deform easily and as such provide reliable long term performance. The weak point of pulsation free meters can be the connection of the two impeller pairs as this mechanical coupling is very sensitive to load differences between the two sets of impellers. The ELGAS DUAL meter uses a significantly stronger spline and spline shaft to connect the two pairs of impellers.

Exchangeable flanges

By using exchangeable flanges, the installation connection of the meter can easily been changed from DIN to ANSI or from DN100 (4") to DN150 (6").

Performance & dimensions EMR Dual Series


	Performance					Dimensions							
Volume V [dm³]	G-value [-]	Qmax [m³/h]	Qmin	Qt	Diameter	L [mm]	H [mm]	A		B [mm]	C		Weight STEEL [kg]
			Atm.Air [m³/h]	Atm.Air [m³/h]	D [mm]			Univ. [mm]	Basic [mm]		Univ. [mm]	Basic [mm]	
2.41	G160	250	2.5	16	100	241	288	446	429	186	260	243	32
	G250	400	2.5	25	100	241	288	446	429	186	260	243	32
3.96	G250	400	4	25	150	260	288	554	537	249	305	288	41
	G400	650	4	40	150	260	288	554	537	249	305	288	41
6.34	G400	650	6.5	40	150	260	288	692	675	318	374	357	51
	G650	1000	6.5	65	150	260	288	692	675	318	374	357	51

EMR HP series for pressures up to 100 bar

The EMR HP series of rotary gas meters is designed to meet the highest demands of reliable and accurate measurement of gas flow under high pressure conditions. The meters fully comply with the EN12480:2002, EN12480:2015 and OIML R137 1&2 (2014) and as such can be used for all custody transfer applications.

The actual meter body is made from aluminum and is kept in position by steel meter housing. This housing holds the meter body, without any stress, in position between the adjacent flanges. Since the meter body is not affected by stress from the flanges or the piping, the clearances between the impellers and the body are optimized. As such the superb metrological performance achieved in the low pressure ELGAS rotary meter is maintained under high pressure conditions as well.

Due to the large rangeability of 1:100, the EMR HP rotary meter is very suitable for small city gate stations as the actual load of this type of station varies widely. Square impellers and improved position of the main bearings makes the cartridge very robust and less sensitive to flow and pressure shocks. Unlike other approved flow metering devices, such as turbine meters and ultrasonic meters, a rotary meter can be installed close to regulators and without the need for extended straight pipe or specially prepared inlet sections.

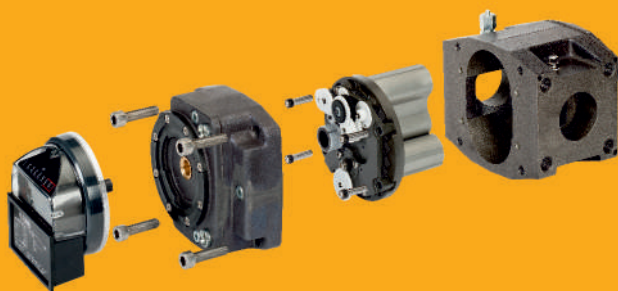


Bypass for security of supply

The EMR HP series can be equipped with a spring loaded bypass valve. If a meter locks, the differential over the bypass valve will increase and the valve will open allowing gas to pass. This security of supply feature makes the EMR HP suitable for use in critical installations where gas flow cannot be interrupted. The opening of the bypass can be monitored by measuring the differential over the meter.



Performance & dimensions EMR HP series

Performance						Dimensions High Pressure							
Volume V [dm ³]	G-value [-]	Qmax [m ³ /h]	Qmin Atm.Air [m ³ /h]	Qt Atm.Air [m ³ /h]	Diameter D [mm]	L [mm]	H [mm]	A		B	C		Weight STEEL [kg]
								Univ. [mm]	Basic [mm]	[mm]	Univ. [mm]	Basic [mm]	
0.39	G10	40	0.4	4	40 or 50	240	240	364	347	150	214	197	65
	G16	40	0.4	4	40 or 50	240	240	364	347	150	214	197	65
0.61	G25	65	0.65	6.5	40 or 50	240	260	353	323	114	239	209	65
	G40	65	0.65	6.5	40 or 50	240	260	353	323	114	239	209	65
0.72	G40	65	1	6.5	50	273	260	353	323	114	239	209	65
0.85	G65	100	1	10	50	240	260	404	374	118	286	256	73
1.16	G65	100	1	10	50	273	260	404	374	118	286	256	73
1.45	G100	160	2.5	16	80	273	260	436	406	134	302	272	85
3.17	G160	250	4	25	80 or 100	375	363	493	463	215	278	248	168

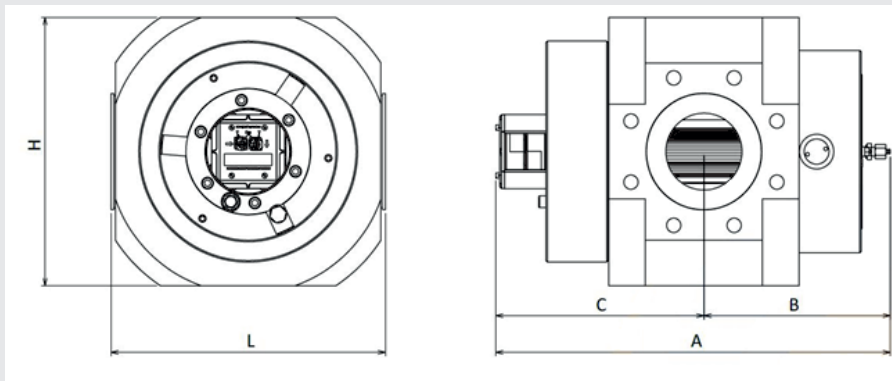




Co-funded by
the European Union



Your local ELGAS business partner



www.elgas.cz



sales@elgas.cz



Semtínská 211
533 53 Pardubice, Czech Republic



+420 466 414 500
+420 466 414 511