

Phoenix AM/RT

Combustion Analysis System and High Speed DAQ

The Ideal Instruments for Optimal Combustion Analysis

The performance of an internal combustion engine depends largely on the processes taking place inside the combustion chamber and engine cylinder. The critical metrics include engine power, fuel economy and emissions compliance.

The A&D Phoenix combustion analysis product line offers the ideal instruments for optimal engine calibration. Built on more than 25 years of experience and an installed base of 300+ systems worldwide, Phoenix sets the standard for advanced combustion analysis systems.

The Phoenix AM (Acquisition Module) provides the foundation for any desired combustion analysis system configuration. The 12 high-speed analog input channels support engine speeds up to 20,000 rpm at 0.1° crank angle resolution. When required, two Phoenix AMs can be combined to create a 24-channel system.

By adding a Phoenix RT (Real Time) module, the system will support up to 48 channels and real-time cycle-by-cycle combustion analysis. The Phoenix RT also allows the streaming of the processed data to 3rd-party systems via standard communication interfaces (e.g. CAN, XCP on Ethernet, or UDP).

The Phoenix Combustion Analysis Software (CAS) provides the ability to configure the system hardware based on the specific testing needs of the application. Using the acquired data, Phoenix CAS calculates all of the typical combustion parameters, including Indicated Mean Effective Pressure (IMEP), Heat Release and full Knock evaluation. The results can be viewed with customizable display objects and stored in a variety of formats.

Benefits:

- Based on more than 30 years of experience, Phoenix systems include all the features necessary to meet today's dynamic combustion analysis requirements.
- Phoenix Acquisition Modules (AM) and Real Time (RT) Modules can be arranged in variety of configurations to support most combustion applications.
- Cycle-by-cycle combustion results can be streamed to third-party systems using multiple standardized protocols (XCP on Ethernet, UDP, CAN) for data collection and as feedback signals for closed-loop control.
- To provide flexibility for today's ever-changing industry, Phoenix offers user-defined cycle-by-cycle calculations and allows for implementation of proprietary algorithms (i.e. Knock).



A 24-channel Phoenix system consisting of two Acquisition Modules (AM) and one Real-Time (RT) module.

Americas

A&D Technology, Inc.
Ann Arbor, MI USA
+1 (734) 973-1111
www.AandDTech.com

Europe

A&D Instruments
Abingdon, Oxon, UK
+44 (0) 1235-550-420
www.andprecision.com

Asia

A&D Technology Trading Co. A&D Company, Ltd.
Shanghai, China Tokyo, Japan
+86 (0) 21-3393-2340 +81 (0) 3-5391-2753
www.AandDTech.com www.AandD.co.jp

Australia

A&D Australasia Pty Ltd.
Kensington, VIC, Australia
+61 (0) 3-9372-1522
www.andaustralasia.com.au


Phoenix AM/RT

Combustion Analysis System & HS DAQ

Phoenix CAS

Built-in Combustion Calculations

- Indicated Mean Effective Pressures (IMEP)
- Misfire Detection
- Full Knock Evaluation
- Start and End of Combustion
- Mass Fraction Burned and Heat Release
- Peak Pressure and Location of Peak Pressure
- Maximum Rise and Location of Maximum Rise Rate
- Combustion Noise Level Evaluation
- Ignition and Injection Timing
- Ignition Delay

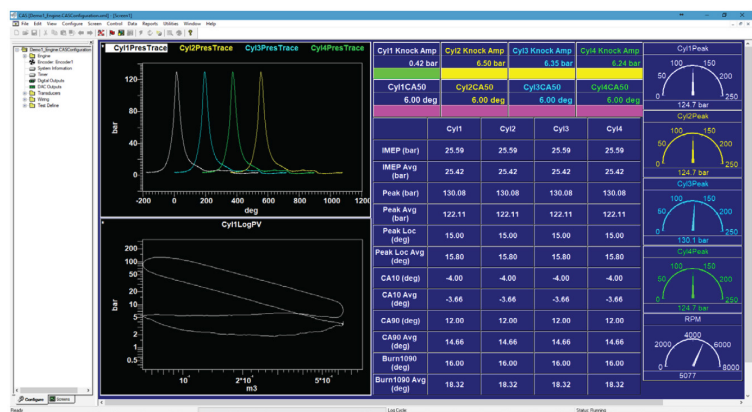

Benefits

- A variety of configurable display objects allow for clear and concise data review
- Compatible with industry-standard post-processing tools
- Calculate and view combustion parameters during testing for data analysis
- Graphical interface simplifies hardware configuration

Typical Configurations

The Phoenix AM and RT modules can be combined in a variety of configurations, from a 12-channel to a 48-channel RT system.



24-Channel Phoenix RT



36-Channel Phoenix RT

Specifications

Category	Feature	Phoenix AM	Phoenix RT
High-Speed Analog Inputs	# Channels	12 per module up to 24	12 per module up to 48
	Resolution	16-bit	16-bit
	Acquisition Rate	20,000 RPM at 0.1° 2 MHz	20,000 RPM at 0.1° 2 MHz
	Low-pass filters	None, 12.5kHz, 25kHz, 50kHz	None, 12.5kHz, 25kHz, 50kHz
	Input Ranges	± 1 V, ± 2 V, ± 5 V, ± 10 V	± 1 V, ± 2 V, ± 5 V, ± 10 V
Low-Speed Analog Inputs	Input Impedances	~25 kΩ (~100 kΩ on ± 50 V range)	~25 kΩ (~100 kΩ on ± 50 V range)
	# Channels		
	Resolution		
	Acquisition Rate		
	Input Ranges		
Analog Outputs	# Channels		16
	Resolution		16-bit
	Update Rate		100 Hz
	Output Range		± 10 V
	Output Impedance		± 10 V
Digital I/O	# Channels (Up to four used by an encoder)	8 inputs	16 outputs
	Input Ranges	TTL	
	Maximum Encoder Resolution	0.1°	
			N/A
Data & Analysis	Analysis Method	Data is streamed to host PC for analysis	Real-time cycle-by-cycle data is streamed to the DSP core on-board Phoenix RT for analysis
	Analysis rate without missing an engine cycle	Lossless real-time analysis not guaranteed over 1,200 RPM	12,000 RPM at 0.1°
	System Memory	256 MB	2 GB
	Non-volatile logging	N/A	SD
	Test Bench Interfaces	Winsocket	Winsocket, UDP, XCP and CANbus
	Host PC Connection	1 Gigabit Ethernet	1 Gigabit Ethernet
	Headless Operation	No	No
Power & Mechanical	Input Power	10 - 16 volts DC (50 watts @ 12VDC) 120/240 V 50/60 HZ VAC external power supply	10 - 30 volts DC (50 watts @ 12VDC) 120/240 V 50/60 HZ VAC external power supply
	Dimensions (Single Module)	343mm (W) x 194mm (D) x 44mm (H) 13.5" (W) x 7.6" (D) x 1.8" (H)	343mm (W) x 200mm (D) x 44mm (H) 13.5" (W) x 7.9" (D) x 1.8" (H)
	Weight (Single Module)	2.2 kg (4.9 lb.)	2.2 kg (4.9 lb.)
Environmental	Operating temperature	0 °C to 50 °C (32 °F to 122 °F)	0 °C to 50 °C (32 °F to 122 °F)
	Operating humidity	0% to 95% humidity non-condensing	0% to 95% humidity non-condensing

Americas

A&D Technology, Inc.
Ann Arbor, MI USA
+1 (734) 973-1111
www.AandDTech.com

Europe

A&D Instruments
Abingdon, Oxon, UK
+44 (0) 1235-550-420
www.andprecision.com

Asia

A&D Technology Trading Co. A&D Company, Ltd.
Shanghai, China Tokyo, Japan
+86 (0) 21-3393-2340 +81 (0) 3-5391-2753
www.AandDTech.com www.AandD.co.jp

Australia

A&D Australasia Pty Ltd.
Kensington, VIC, Australia
+61 (0) 3-9372-1522
www.andaustralasia.com.au