


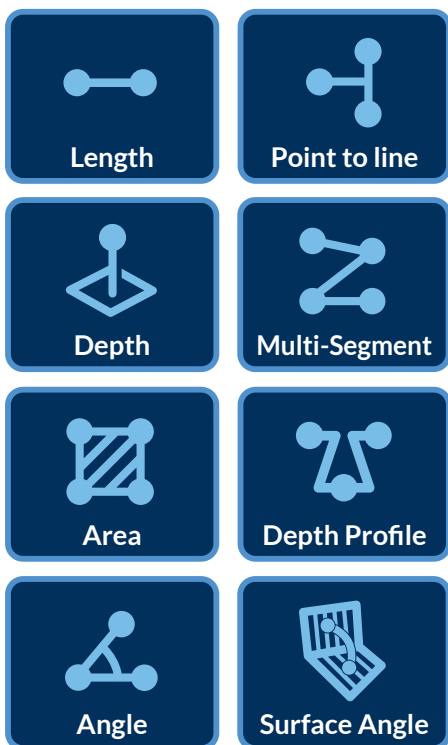

3D MEASUREMENT VJ-4 OVERVIEW

Designed to enhance inspection accuracy and efficiency. The 3D Measurement VJ-4 Video Borescope allows users to capture precise measurements in real time, enabling more informed maintenance decisions across a range of applications.

6.0mm

3.9mm

FV FRONT-VIEW

SV SIDE-VIEW

The new 3D Video Borescope is now available in 6.0mm, 3.9mm, Front-View & Side-View configurations.




LENGTH

Measures the straight line distance between two points. Ideal for reliable sizing cracks, features, or wear patterns.

Example Use Cases

- Linear defect lengths (i.e. cracks)
- Characterize the size and location of foreign material inside a confined space or defects on a part
- Assessing size of remaining witness marks
- Tracking wear progression from corrosion, wear, expansion, or erosion

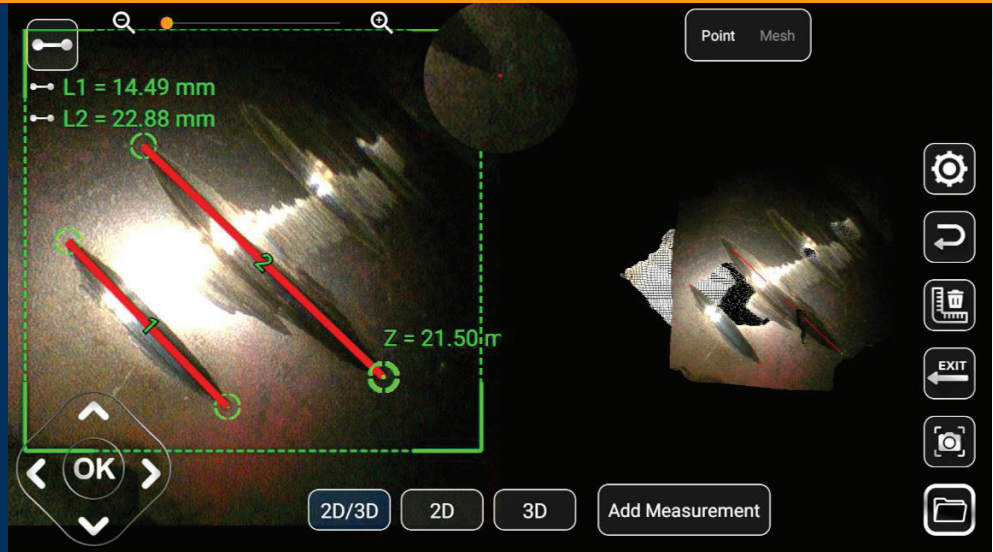

POINT-TO-LINE

Measures the distance from a line to a selected point. Perfect for blade edge damage, gap width, and weld width. The perpendicular measurement method ensures consistent results even when working on angled or irregular surfaces.

Example Use Cases

- Width of a discontinuity along a blade edge
- Dimensional span of a gap, groove, or weld profile






DEPTH

Measures the distance from a reference plane to a selected point. Whether assessing corrosion, dents, or weld height, depth measurement provides a clear understanding of how far a feature extends above or below a reference surface.

Example Use Cases

- Depth of an isolated corrosion or erosion pit
- Extent of FOD impact damage on a component surface
- Height deviation of a weld crown or wear groove

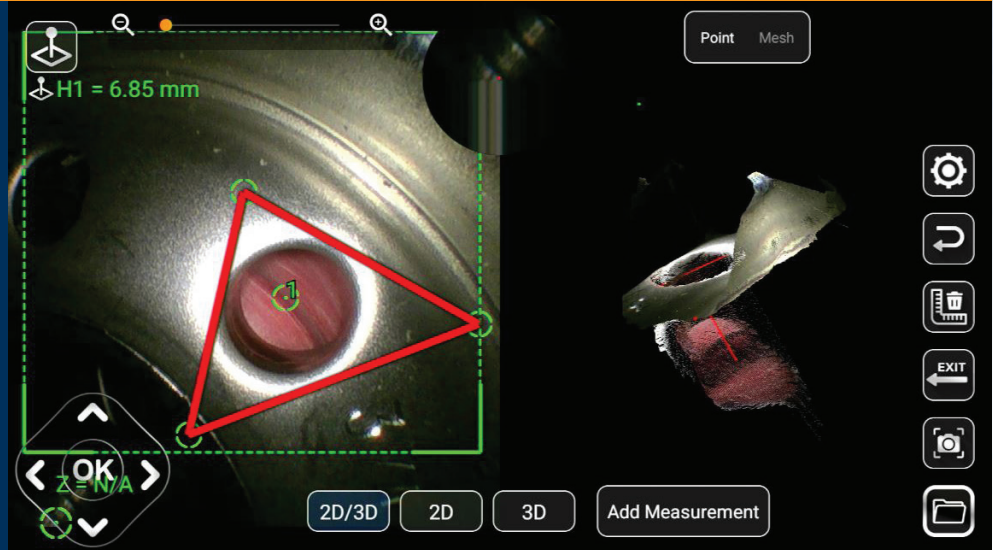


MULTI-SEGMENT

Calculates the total length along an irregular path. By placing multiple cursors along the feature of interest, this tool measures the true geometry of any discontinuity that changes direction.

Example Use Cases

- Total length of irregular surface
- Total length of a jagged crack

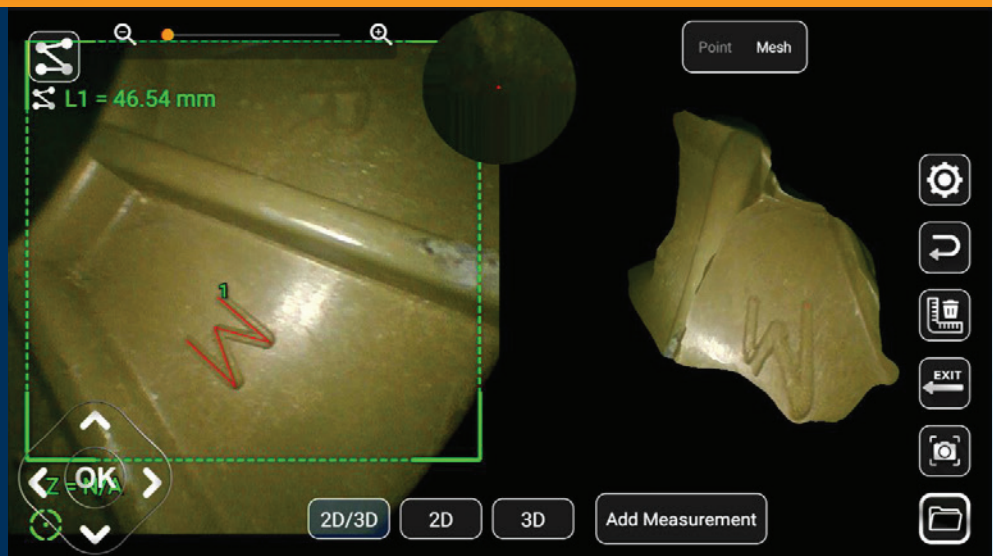




AREA

Measures the planar surface area of a feature by outlining its boundary with multiple cursor points. Area measurement provides a quantifiable, two-dimensional representation of the surface area damage or material area loss.

Example Use Cases

- Extent of coating loss on a component surface
- Total surface area of a corrosion or pitting field

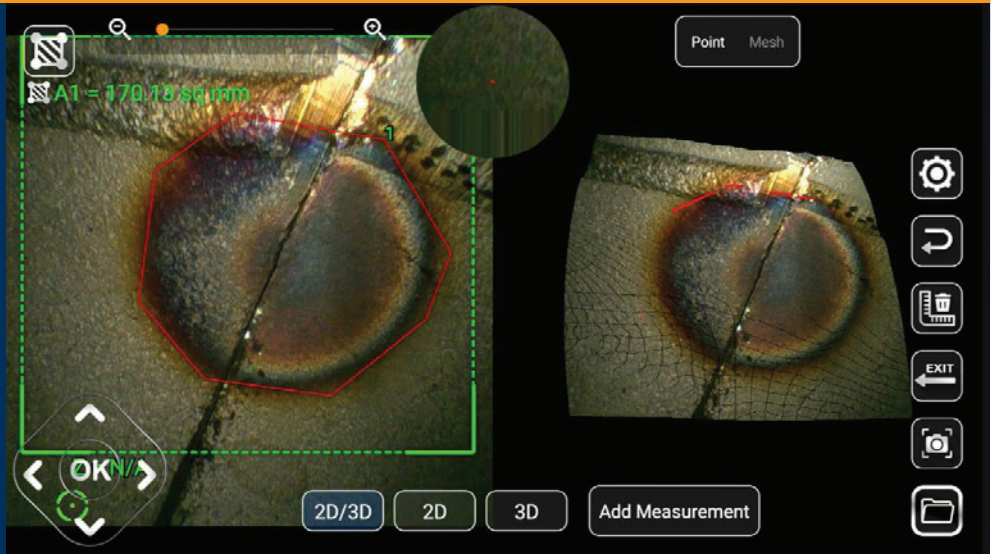


DEPTH PROFILE

Generates a cross-sectional map of surface variation, identifying the highest and lowest points relative to a reference plane. Ideal for visualizing and quantifying subtle or complex surface geometry.

Example Use Cases

- Cross-sectional profile of a corrosion or erosion pit
- Surface deviation along a weld or wear groove

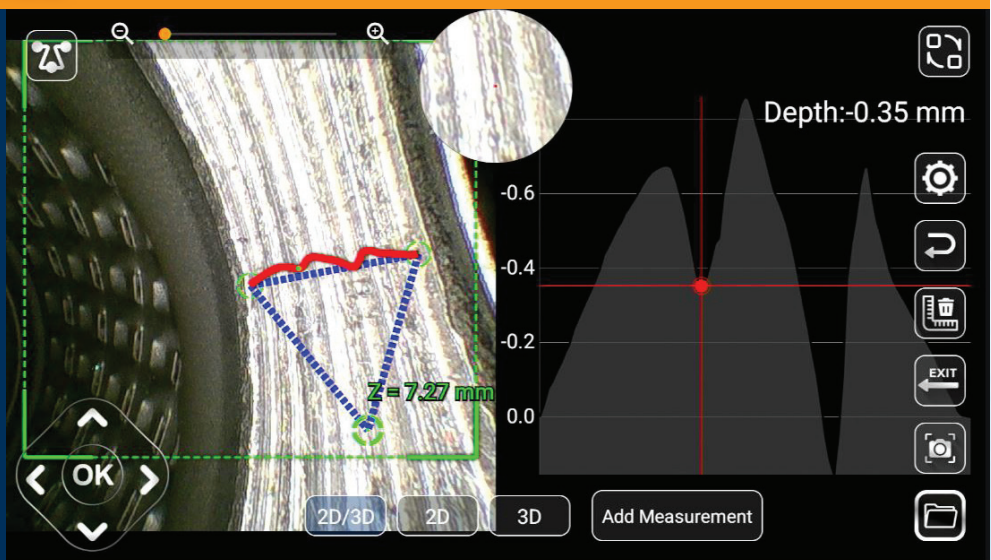




- Erosion angle of a wear surface on a turbine blade or vane platform
- Angular measurement of material loss on an oil and gas chute or valve seat



- Bend angle of a deformed or impacted structural component




EASY ORGANIZATION & STORAGE

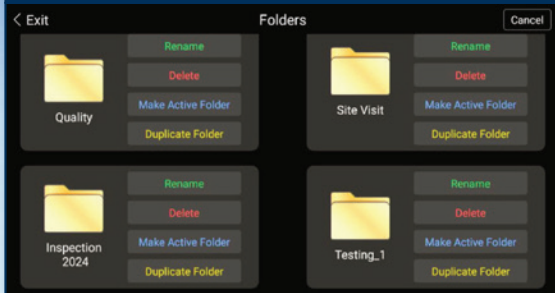


INSTANT ACCESS TO KEY FUNCTIONS




WIDE RANGE OF SETTINGS

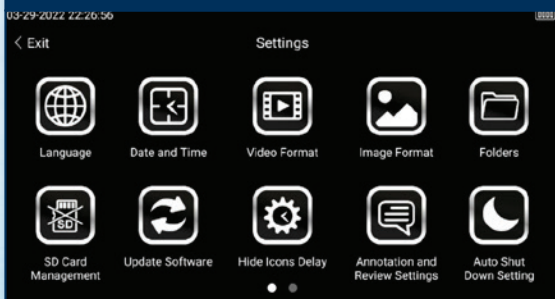

ON-SCREEN ANNOTATION

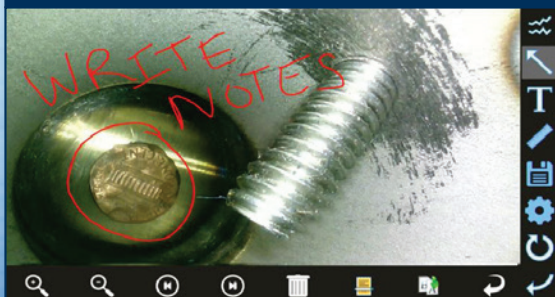

TOUCH-SCREEN OR STYLUS INTERFACE

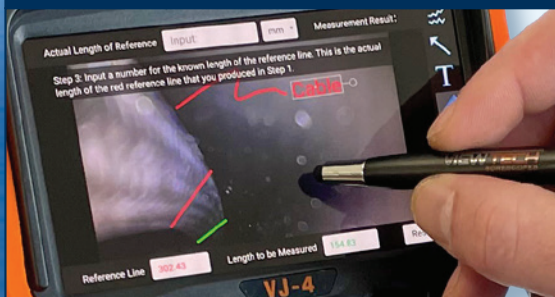

**RUGGEDIZED CASE & ACCESSORIES
ARE INCLUDED WITH EVERY
BORESCOPE WE SELL**



**OPERATOR
DRIVEN
INSPECTIONS**

**QUICKLY TURN
YOUR INSPECTION
PICTURES INTO CLEAN,
PROFESSIONAL PRINTED
OR DIGITAL REPORTS.**

