



**The IP&E
Specialist**

Electric & Fuel Cell Vehicle Powertrain Application Guide

TTI, Inc., – A Berkshire Hathaway Company



The IP&E Specialist

The Specialist in Electronics Component Distribution

Founded in 1971, TTI has steadily grown to become a world leading specialist distributor of electronic components. The company was founded on the premise that passive component purchasing could be made more efficient by offering product specialization, customer-driven service and proprietary supply chain solutions.

Why TTI?

- **Technical Experts** TTI's European team of field-based Sales Engineers and local Product and Technical Specialists are here to support you; from understanding component trends, sustainable sourceability and new product roadmaps, to in depth technical support for your design from our technical engineering experts.

- **Value Added Services** Connector assembly is one of the most important value-added services at TTI, Inc. – Europe. We are specialized in distributing manufacturer controlled and certified connectors and interconnect solutions from globally leading suppliers. Thanks to a large inventory level of connector components, TTI, Inc. – Europe can serve any market requirements.

- **Global Distribution Centers** Our European headquarters is located just outside of Munich, Germany in Maisach-Gernlinden. In total, we have 45.000m² of dedicated warehouse space and local sales and technical support in over 40 locations across Europe. TTI has more than 195.000m² of automated warehousing in North America, Europe and Asia. All are linked into a global warehouse management system that provides superior customer service and overall business efficiencies. Wherever you are in the world, TTI can support you. Year after year, customers rate our inventory availability, on-time delivery and accuracy among the very best in the industry – contact us today to find out what a true specialist has to offer.

- **Quality and Reliability** TTI's global warehouses are all ISO-registered and have received certification to the ISO 9001 and ISO 14001 Standards. TTI Europe is also certified to EN9120/EN9100, IECQ-CECC and ISO/IEC 27001 Standards. Additionally, our European sales branches are ISO 9001 certified. TTI has one global documentation system that ensures that every TTI branch and warehouse in the world follows the same processes.





80+
Suppliers



45.000 m²
Warehousing Space



One of the largest Autostore systems in Europe



40
Sales Locations

24/7
Available to Order Online



www.ttieurope.com



Applications

Auxiliary Systems

- Electric cooling pumps
- Electric water pumps
- HV air compressors
- HV air conditioning
- HV brake resistors
- HV heaters
- HV junction boxes
- Power steering pumps
- System control units

Electric Vehicle Systems


- AC/DC converters
- Battery packs
- Battery management systems
- DC/DC converters
- Drive inverters
- Electric motors
- Energy storage systems
- On-Board chargers
- Power distribution units
- Traction motor inverters

Fuel Cell Systems

- Coolant pumps
- Compressors
- Electrolysers
- Fuel cell engines
- Fuel cell stacks
- Hydrogen gas sensors
- Hydrogen storage units
- System control modules

Vehicle Types

- Agricultural equipment
- Automated guided vehicles
- Boats & watercraft
- Buses & mini-buses
- Cars & sportscars
- Construction equipment
- E-bikes
- Forklifts
- Lift platforms
- Material handling equipment
- Mining equipment
- Motorcycles & scooters
- Ships & ferries
- Trucks (Delivery & Long Haul)

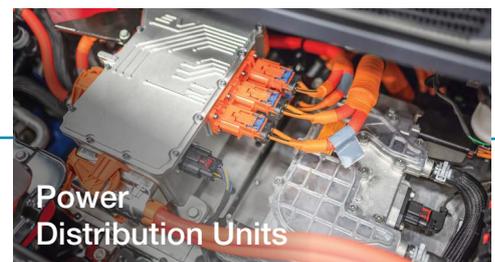



Technology Trends

Antennas

- IOT antennas in Battery Management Systems

Capacitors

- Wider temperature range
- Custom HV Film Capacitors
- Hybrid and polymer

Circuit Protection

- Overvoltage and Overcurrent protection in BMS modules
- HV Fuses that can withstand high vibration

Connectors

- 1500V Connector Systems
- Ultrasonically welded cable assemblies
- CCS Inlets up to 500A
- NACS Inlets in USA
- MCS Inlets for heavy vehicles

Discrete Semiconductors

- 600V & 1200V Mosfet solutions
- Low voltage Mosfets and TVS protection diodes

Electromagnetic

- Expanded portfolios of high power inductors
- EMI suppression and filtering

Power Supplies

- Wider input range DC/DCs supporting battery systems

Relays

- Voltage levels above 1000V
- Pressurised and Non-pressurised options
- Move to DC Contactor solutions

Resistors

- Thin film precision in inverter designs
- Low ohmic shunts and current sense resistors

Sensors

- Current sensors for cables & busbars
- Thermal runaway sensors for battery packs
- 3-D position sensing in motors and compressors

Switches

- Enhanced sealing performance
- Need for emergency stops
- Anti-vandal proof switches



High Voltage Connectors



<p>Amphenol INDUSTRIAL PRODUCTS GROUP</p>	<p>Amphenol INDUSTRIAL PRODUCTS GROUP</p>	<p>Amphenol INDUSTRIAL PRODUCTS GROUP</p>	<p>Amphenol INDUSTRIAL PRODUCTS GROUP</p>
<p>Radlok</p>	<p>Surlok Plus</p>	<p>HVSL 2xx-6xx Series</p>	<p>E-Power Lite</p>
<ul style="list-style-type: none"> • 1000V DC, up to 500A • Unshielded and wire to device • 10mm² to 150mm² cable sizes 	<ul style="list-style-type: none"> • 1500V DC, up to 500A, IP67/ IP69K • Unshielded and wire to device • 6mm² to 95mm² cable sizes 	<ul style="list-style-type: none"> • Up to 1000V DC • Shielded, inline and wire to device • 2, 3, 4, 5 and 6 circuit versions 	<ul style="list-style-type: none"> • 1000V DC, up to 120A • Shielded and wire to device • 2.4, 3.6 and 5.7mm contact versions
			
<p>Amphenol INDUSTRIAL PRODUCTS GROUP</p>	<p>Amphenol COMMUNICATIONS SOLUTIONS</p>	<p>Amphenol INDUSTRIAL PRODUCTS GROUP</p>	<p>Amphenol INDUSTRIAL PRODUCTS GROUP</p>
<p>HVSL 800 – 1400 Series</p>	<p>DuraEV & DuraSwap</p>	<p>CHD Series</p>	<p>HVPT-M Series</p>
<ul style="list-style-type: none"> • 1000V DC, up to 430A • Shielded and wire to device • 8.0, 10.0, 12.0 & 14.0mm contact versions 	<ul style="list-style-type: none"> • 10,000 mating cycles • 70A continuous current • IP67 rated in both mated and unmated • Finger protection 	<ul style="list-style-type: none"> • Voltage rating 1.500V DC • Up to 500A • EMI shielding • From 95 to 150 mm² cable 	<ul style="list-style-type: none"> • Voltage Rating 1000VDC • 2 and 3 circuit versions • 70 to 150mm² shielded wire • IP67 IP6K9K
			
<p>Amphenol INDUSTRIAL PRODUCTS GROUP</p>	<p>Amphenol INDUSTRIAL PRODUCTS GROUP</p>	<p>Amphenol INDUSTRIAL PRODUCTS GROUP</p>	<p>Amphenol INDUSTRIAL PRODUCTS GROUP</p>
<p>Powerlok</p>	<p>Powerlok Gen 2</p>	<p>Manual Service Disconnects</p>	<p>Powerlink Cables</p>
<ul style="list-style-type: none"> • 1000V DC, up to 500A, IP67 • Metal, shielded and wire to device • From 16 to 150mm² cables 	<ul style="list-style-type: none"> • 1000V DC, up to 500A, IP67/ IP6K9K • Metal, shielded and wire to device • Improved keying, latching and sealing compared to Gen 1 	<ul style="list-style-type: none"> • Micro-MSD 1500V DC, up to 350A • Mini-MSD: 690V DC, up to 400A • MSD: 690V DC, up to 630A • MSD-XL: 1000V DC, up to 630A 	<ul style="list-style-type: none"> • Shielded & unshielded versions • From 2.5 to 150mm² cables • Standard: ISO 6722 Class C 125
			

High Voltage Connectors




<p>• APTIV •</p>	<p>• APTIV •</p>	<p>• APTIV •</p>	<p>• APTIV •</p>
<p>PowerPack Sealed Ring Connector</p>	<p>PowerPack HV Apex 280 OBC</p>	<p>ShieldPack HV APEX280 SB</p>	<p>ShieldPack HV AK CLASS 1 SMU</p>
<ul style="list-style-type: none"> • 48V DC, 250A at 85°C • Unshielded and wire to device • High robustness against vibrations 	<ul style="list-style-type: none"> • Powerpack HV APEX 280 OBC 3 & 5 ways is optimized for 32A on-board charging solutions using 6mm² cable range and based on field proven Apex 2.8 terminal 	<ul style="list-style-type: none"> • 1000V DC, 38A at 85°C • Bundle shielding and wire to device • 2-stage disconnect for safe unmating 	<ul style="list-style-type: none"> • 850V DC, 30A at 85°C • Shielded and wire to device • Standard AK interface
			
<p>• APTIV •</p>	<p>• APTIV •</p>	<p>• APTIV •</p>	<p>• APTIV •</p>
<p>ShieldPack HV280 SI</p>	<p>ShieldPack HV CTS 630 SI</p>	<p>ShieldPack HV AK PASS-THROUGH SI</p>	<p>ShieldPack HV AK CLASS 4 SI</p>
<ul style="list-style-type: none"> • 1000V DC, 40A at 85°C • Shielded and wire to device • Inner connector with TPA 	<ul style="list-style-type: none"> • 1000V DC, 50A at 85°C • Shielded, inliner and wire to device • Most compact 630 2-way system 	<ul style="list-style-type: none"> • 1000V DC, 1,2 3 ways • Shielded and wire to device • High robustness against vibrations 	<ul style="list-style-type: none"> • 1000V DC, 245A at 85°C • Shielded and wire to device • Inline and right angle versions
			
<p>• APTIV •</p>	<p>• APTIV •</p>	<p>• APTIV •</p>	<p>• APTIV •</p>
<p>ShieldPack HV RCS800 / 890 SB</p>	<p>ShieldPack HV RCS890 SI</p>	<p>ShieldPack HV RCS800/890 SI DM</p>	<p>ShieldPack HV RCS1100/1190 SI</p>
<ul style="list-style-type: none"> • 1000V DC, 230A at 85°C • Bundle shielding and wire to device • Inline and right angle versions 	<ul style="list-style-type: none"> • 600V DC, 210A at 85°C • Shielded and wire to device • Slider solution for limited space designs 	<ul style="list-style-type: none"> • 850V DC, 220A at 85°C • Direct mate shielding to device • Innovative screw position assurance 	<ul style="list-style-type: none"> • 1000V DC, 370A at 85°C • Shielded and wire to device • Innovative screw position assurance
			

High Voltage Connectors





 <small>AUTHORIZED DISTRIBUTOR</small>	 <small>AUTHORIZED DISTRIBUTOR</small>	 <small>AUTHORIZED DISTRIBUTOR</small>	 <small>AUTHORIZED DISTRIBUTOR</small>
<p>HVA280</p>	<p>HVA 400-2</p>	<p>HVA630</p>	<p>HVA1200</p>
<ul style="list-style-type: none"> • 850V DC, 40A at 85°C, 2&3 way • Shielded and wire to device • Multicore and individually shielded versions 	<ul style="list-style-type: none"> • 1000V, 60 A at 85 °C (6 mm²) • Suitable for Class 1 & 2 applications • High Vibration Performance (SG3), terminal 	<ul style="list-style-type: none"> • 850V DC, up to 56A at 85°C, 2&5 way • Shielded and wire to device • Straight tab and 90° headers 	<ul style="list-style-type: none"> • 1000V DC, up to 100A at 85°C • Shielded and wire to device • Inline and right angle cable plugs
			
 <small>AUTHORIZED DISTRIBUTOR</small>	 <small>AUTHORIZED DISTRIBUTOR</small>	 <small>AUTHORIZED DISTRIBUTOR</small>	 <small>AUTHORIZED DISTRIBUTOR</small>
<p>HVP800</p>	<p>HVP1100</p>	<p>IPT</p>	<p>Manual Service Disconnects</p>
<ul style="list-style-type: none"> • 850V DC, up to 200A at 85°C, 2&3 way • Shielded and wire to device • Inline and right-angle cable plugs 	<ul style="list-style-type: none"> • 750V, up to 300A at 85°C • Shielded and wire to device • Multiple coding options available 	<ul style="list-style-type: none"> • 850V DC, 1, 2 & 3-way versions • Shielded and wire to device • 16, 25, 35 and 50mm² versions available 	<ul style="list-style-type: none"> • Automotive – 450V DC, up to 360A fuses • ICT – 750V DC, up to 630A fuses
			
 <small>AUTHORIZED DISTRIBUTOR</small>	 <small>AUTHORIZED DISTRIBUTOR</small>	 <small>AUTHORIZED DISTRIBUTOR</small>	 <small>AUTHORIZED DISTRIBUTOR</small>
<p>HC Stak 25</p>	<p>PCON Terminal</p>	<p>CSJ 1800 Series</p>	<p>HV 2100 Series</p>
<ul style="list-style-type: none"> • 1000V DC, up to 257A at 85°C • Shielded and wire to device • Released for copper and aluminium wire 	<ul style="list-style-type: none"> • 11, 18 and 21mm contacts available • Supports cables from 5 to 95mm² • Using silver plated contacts 	<ul style="list-style-type: none"> • 1000V, up to 257 A at 85°C • UL Finger + 2 mm / 30N protection • PCON 18 high- power terminal 	<ul style="list-style-type: none"> • 1000V DC, Up to 372A at 85C • Compact design • UL+2mm finger protection • Proven PCON 21 terminal design
			

High Voltage Connectors

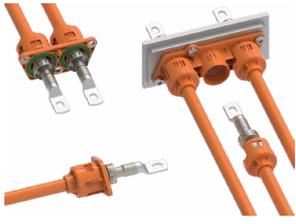 <p>AUTHORIZED DISTRIBUTOR</p>	 <p>AUTHORIZED DISTRIBUTOR</p>	 <p>AUTHORIZED DISTRIBUTOR</p>	 <p>AUTHORIZED DISTRIBUTOR</p>
<p>HVA HD400</p>	<p>HVA IPT-HD Series</p>	<p>HVP-HD1000 Series</p>	<p>HVP-HD1400 Series</p>
<ul style="list-style-type: none"> • Up to 1000 VDC, and 60 A (at 80°C) • Can withstand transmission-level vibrations • Connector Position Assurance (CPA) 	<ul style="list-style-type: none"> • 50/70/95 mm² conductors • Low-contact resistance shielding • Handles excessive vibrations • IP67, IP68 and IP6K9K sealing rated 	<ul style="list-style-type: none"> • 1000V and up to 300A • 35 mm², 50 mm², 70 mm² cables • Up to 3 pins in one header connector • Both 180° and 90° headers 	<ul style="list-style-type: none"> • 1000v and up to 500A • 70 mm², 95 mm², 120 mm², 150 mm² • Up to 3 pins in one header connector • Both 180° and 90° headers
			
<p>• APTIV •</p>	<p>• APTIV •</p>	<p>• APTIV •</p>	<p>• APTIV •</p>
<p>SHIELDPACK™ HV630 HVIL SI</p>	<p>SHIELDPACK™ HV AK CLASS 2 SMU 2 WAY</p>	<p>SHIELDPACK™ HV METAL PASS-THROUGH SI 70-95mm² 1 WAY</p>	<p>SHIELDPACK™ HV PLASTIC PASS-THROUGH SI 95-120mm² 1 AND 2 WAY</p>
<ul style="list-style-type: none"> • 1000V DC, 60A at 85°C • Inner connector with TPA • Industry leading vibration performance 	<ul style="list-style-type: none"> • For applications with needs up to 55A • Compliant to LV214 / LV215 • Tool-less mating & un-mating system 	<ul style="list-style-type: none"> • For applications with needs up to 400A • Compliant to USCAR-2 / USCAR-37 • High voltage panel mount system 	<ul style="list-style-type: none"> • High operating temperature • High robustness against vibrations • Solution for demands on 120 mm²
			
<p>Rosenberger</p>	<p>Rosenberger</p>	<p>YAZAKI</p>	<p>YAZAKI</p>
<p>HVR 200 Series</p>	<p>HPK Series</p>	<p>YPT-E Series</p>	<p>2P R8.0MM HV CONNECTOR</p>
<ul style="list-style-type: none"> • 1000V DC, Up to 270A at 85C • Test voltage 2700 V DC • Creepage 5 mm • Clearance 2.19 mm 	<ul style="list-style-type: none"> • 1000 V DC, 280 A at 85 °C • Cable connectors (1, 2, or 3-pole) • Test voltage 3200 V DC • Temperature range -40 °C to +140 °C 	<ul style="list-style-type: none"> • Temperature Class - LV215 Profile 4 • Vibration Class - LV215 Class 3 • Sealing Class - IP6K9K • Max. Current 275A 85 C w/ 50 sqmm cable • Max. Voltage 800V 	<ul style="list-style-type: none"> • TemperatureClass -USCAR-2T3 (-40.125C) • VibrationClass - USCAR--2V • SealingClass - USCAR-2S3 • Max Current - 260A@85Cw/50sqmm cable
			

Vehicle Inlets & Custom Assemblies

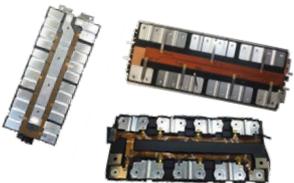


<p>Amphenol INDUSTRIAL PRODUCTS GROUP</p>	<p>Amphenol INDUSTRIAL PRODUCTS GROUP</p>	<p>Amphenol INDUSTRIAL PRODUCTS GROUP</p>	<p>Amphenol INDUSTRIAL PRODUCTS GROUP</p>
<p>AC Charge Inlets – Type 2</p>	<p>AC / DC Combo Inlets – Type 2</p>	<p>CCS2 - 500A Inlet</p>	<p>CCS1 - 300A Inlet</p>
<ul style="list-style-type: none"> • 500V DC, 16A, 32A 1 & 3 Phase • IP55 (mated), 2.5 to 6mm² cables • TUV Certification 	<ul style="list-style-type: none"> • 480V AC & 1000V DC, • 32A AC and up to 500A DC • Up to 100mm² cables • TUV Certification 	<ul style="list-style-type: none"> • 1000V (DC+ / DC-), 480V (L1,L2,L3 & N) • 500A (DC+ & DC- :150MM² Cable) • 63A (L1,L2,L3 & N: 16MM² Cable) • Mating Cycles >10,000 Cycles 	<ul style="list-style-type: none"> • Rated Current 48A AC, 300A DC • Rated Voltage 240V AC, 1000VDC
			
<p>Amphenol INDUSTRIAL PRODUCTS GROUP</p>	<p>Amphenol INDUSTRIAL PRODUCTS GROUP</p>	<p>Amphenol INDUSTRIAL PRODUCTS GROUP</p>	<p>Amphenol INDUSTRIAL PRODUCTS GROUP</p>
<p>North American Charging System Inlet</p>	<p>Megawatt Charging System Inlet</p>	<p>Custom Busbar Assemblies</p>	<p>Custom HV Cable Assemblies</p>
<ul style="list-style-type: none"> • 250A, 400A and 600A versions available • Please contact TTI product management for more information. 	<ul style="list-style-type: none"> • Level 1 - Up to 350A • Level 2 - Up to 1500A • Level 3 - Up to 3000A • Please contact TTI product management for more information 	<ul style="list-style-type: none"> • Amphenol Industrial have the capability to develop custom HV Cable Assemblies. • Please contact TTI for more information. 	<ul style="list-style-type: none"> • Amphenol Industrial have the capability to develop custom busbar assemblies in aluminium or copper. • Please contact TTI for more information.
			
<p>Amphenol INDUSTRIAL PRODUCTS GROUP</p>	<p>Amphenol INDUSTRIAL PRODUCTS GROUP</p>	<p>Amphenol GLOBAL INTERCONNECT SYSTEMS</p>	<p>Amphenol GLOBAL INTERCONNECT SYSTEMS</p>
<p>Custom Cell Connection Systems</p>	<p>Custom Power Distribution Units</p>	<p>Cable Harnesses</p>	<p>High Speed Cables</p>
<ul style="list-style-type: none"> • Temperature and voltage sensing of cells • Cable, FPC and busbar construction • Full assembly design 	<ul style="list-style-type: none"> • Power distribution unit (PDU) • Battery disconnect unit (BDU) • Build to print and custom design 	<ul style="list-style-type: none"> • Amphenol GIS specializes in manufacturing of wire and cable harnesses for various industries such as transportation and heavy equipment. 	<ul style="list-style-type: none"> • We offer products including: MCIO (PCIe Gen6), Extrepoint swift, Ultraport SlimSAS™, OCuLink, HD MiniSAS, MiniSAS, SATA, DisplayPort, HDMI, DVI, USB and Ethernet.
			

Vehicle Inlets & Custom Assemblies

<p>• APTIV •</p>	<p>• APTIV •</p>	<p>• APTIV •</p>	<p> ITT <small>cannon</small></p>
<p>AC / DC Combo Inlets – Type 2</p>	<p>Mode 2 Charge Boxes</p>	<p>Mode 3 Jumpers Cables</p>	<p>AC Charging Inlets – Type 2</p>
<ul style="list-style-type: none"> • AC: slow charge (3-phase, 20A) • DC: fast charge (600V, 125A) • Interface complies with IEC62196 	<ul style="list-style-type: none"> • EVSE restarts in the event of grid fault • Meets IEC62752 standard • IP67 water sealing protection 	<ul style="list-style-type: none"> • Superior durability that is proven in automotive mass production • Wiring crimps sealed from environment • CE & CQC marking/ certification 	<ul style="list-style-type: none"> • IEC 62196 Type 2 vehicle inlet • 20A, 32A, 63A current rating • Optional dust cap or locking devices
			
<p> ITT <small>cannon</small></p>	<p> PHENIX CONTACT</p>	<p> PHENIX CONTACT</p>	<p> PHENIX CONTACT</p>
<p>Mode 3 – AC Jumper Cables</p>	<p>Charx - AC Type 1</p>	<p>Charx - AC Type 2</p>	<p>Charx - CCS Type 1 Inlet</p>
<ul style="list-style-type: none"> • IEC 62196 Type 2 Mode 3 jumper cables • 20, 32 or 63A, single or three phase • Custom lengths possible 	<ul style="list-style-type: none"> • Vehicle Inlet AC type 1, • IEC 62196-2, SAE J1772, • Up to 80 A / 250 V (AC), 	<ul style="list-style-type: none"> • Vehicle Inlet AC type 2 • IEC 62196-2, • Up to 32 A / 480 V (AC) 	<ul style="list-style-type: none"> • Vehicle Inlet CCS type 1, • IEC 62196-2, IEC 62196-3, • Up to 375 A / 1000 V (DC), 48 A / 250 V (AC)
			
<p> PHENIX CONTACT</p>	<p> TE <small>connectivity</small> <small>AUTHORIZED DISTRIBUTOR</small></p>	<p> TE <small>connectivity</small> <small>AUTHORIZED DISTRIBUTOR</small></p>	<p> TE <small>connectivity</small> <small>AUTHORIZED DISTRIBUTOR</small></p>
<p>Charx - CCSType 2 Inlet</p>	<p>AC Charge Inlets CI32ED – Type 2</p>	<p>AC / DC Combo Inlets CI200 – Type 2</p>	<p>AC / DC Combo Inlets CI500 – Type 2</p>
<ul style="list-style-type: none"> • Vehicle charging inlet, CCS type 2, • IEC 62196-2, IEC 62196-3, • Up to 375 A / 1000 V (DC), 32 A / 480 V (AC) 	<ul style="list-style-type: none"> • 480V DC, 16A or 32A 1or 3 phase • IP55 front IP67 back • Vibration: SG 2 (LV 215-1) 	<ul style="list-style-type: none"> • 480V AC & 1000V DC, • 32A AC and up to 200A DC • 50mm² cables, 90 and 180° cable outlet 	<ul style="list-style-type: none"> • 80V AC & 1000V DC, • 32A AC and up to 500A DC • 95mm² cables, 90 and 180° cable outlet
			


PCB Connectors for BMS



<p>Amphenol COMMUNICATIONS SOLUTIONS</p>	<p>Amphenol COMMUNICATIONS SOLUTIONS</p>	<p>Amphenol COMMUNICATIONS SOLUTIONS</p>	<p>Amphenol COMMUNICATIONS SOLUTIONS</p>
<p>0.5mm Power Pin Floating Board-to-Board Connectors</p>	<p>Minitek Microspace™ Crimp-to-Wire Connectors</p>	<p>FlexFast Flex to Board Solution</p>	<p>FlexLock</p>
<ul style="list-style-type: none"> • High speed transmission 10Gb/s • Current rating up to 5A per power pin (5A/pin* 4) • Wide operating temperature from -40°C – 125°C 	<ul style="list-style-type: none"> • Suitable for automotive applications and harsh environments • LV214 Severity-2 compatible • Terminal positioning assurance (TPA) 	<ul style="list-style-type: none"> • Available in 40 positions single flex with right angle SMT configuration. • USCAR-T3V2, LV-214 S1 compliant • Gold plating reduces mating force 	<ul style="list-style-type: none"> • Compact design for automotive applications. • Meets USCAR- T2V2 and LV-214 S3 specifications. • Nominal current of 2A per contact
			
<p>Amphenol COMMUNICATIONS SOLUTIONS</p>	<p>Amphenol INDUSTRIAL PRODUCTS GROUP</p>	<p>JAE</p>	<p>JAE</p>
<p>WireLock</p>	<p>Z-Connect</p>	<p>MX34</p>	<p>MX77</p>
<ul style="list-style-type: none"> • Nominal current of 2A per contact • Supports cable wire gauges from 22AWG to 26AWG. • Available in 10 up to 40 positions 	<ul style="list-style-type: none"> • Anti-vibration • Cost and space saving • Low profile (mated 8.0mm maximum) 	<ul style="list-style-type: none"> • 0.64mm tab size, 3-40 ways • Pin side SMT type: UL94 V-0, others: UL94 HB • Meets automotive requirements • Tested according to USCAR2 	<ul style="list-style-type: none"> • Low profile, 0.4mm pin size, 4-40 ways • R/A SMT specification for automatic PCB mounting • Tested according to USCAR2 standards
			
<p>JAE</p>	<p>molex</p>	<p>molex</p>	<p>molex</p>
<p>MX84B</p>	<p>DuraClik 2.0mm Connector Systems</p>	<p>Mini50 Connection Systems</p>	<p>Mini-Fit Max Connectors</p>
<ul style="list-style-type: none"> • UL94 V-0 material • Tested according to LV214 standards • Structure and dimensions same as MX34 	<ul style="list-style-type: none"> • For high-vibration and high-temp applications • 2 to 15 circuits • Superior electrical contact reliability 	<ul style="list-style-type: none"> • 50% space savings over 0.64mm connectors • Sealed or unsealed receptacles • Designed for interior vehicle environments 	<ul style="list-style-type: none"> • 20.5A of current • 94/V-O Glow-wire resin • End-to-end stackable to deliver more power per mm2
			

PCB Connectors for BMS




			 <small>AUTHORIZED DISTRIBUTOR</small>
<p>ConnTak50</p>	<p>Stak50H</p>	<p>CLIK-Mate</p>	<p>Nano MQS</p>
<ul style="list-style-type: none"> • Single row: 2 to 6 circuits • Dual Row: 10 and 22 circuits • (8 and 20 when used with a CPA) • Right Angle, Vertical SMT 	<ul style="list-style-type: none"> • Terminals - 0.50mm, 1.20mm, 2.80mm • Circuit Sizes - 12 to 109 • 5.0A for 0.50mm • 12.0A for 1.20mm • 30.0A for 2.80mm 	<ul style="list-style-type: none"> • Pitch - 1.25, 1.50 and 2.00mm • Circuit Sizes - 2 - 34 • 1.25mm pitch: 2.5A • 1.50mm pitch: 3.0A • 2.00mm pitch: 4.0A 	<ul style="list-style-type: none"> • wire cross sections down to 0.13 mm² • nominal current of up to 3 amps • TL Version - up to 32 positions • SL version - up to 20 positions.
			
 <small>AUTHORIZED DISTRIBUTOR</small>	 <small>AUTHORIZED DISTRIBUTOR</small>	 <small>AUTHORIZED DISTRIBUTOR</small>	 <small>AUTHORIZED DISTRIBUTOR</small>
<p>Pico MQS</p>	<p>MQS High Voltage Sensing Detector</p>	<p>Generation 50 Connector System</p>	<p>MCON Connector System</p>
<ul style="list-style-type: none"> • 1.27mm Pin-Pitch • 78% Reduced packaging weight • Smallest LV214 qualified crimped connection with Class 2 vibration stability 	<ul style="list-style-type: none"> • TE Connectivity's (TE) Micro Quadlok System, MQS, interconnection system offers high packing density, robust construction and highest functional requirements. 	<ul style="list-style-type: none"> • Qualified for USCAR 2 and 21 and compliant with USCAR 25 • 2-28 Circuits • 1.8mm header footprint 	<ul style="list-style-type: none"> • Up to 150°C for engine applications • 48V ready in the new generation of MCON connectors • IPx9k Weather-proof rating for exterior applications
			
 <small>AUTHORIZED DISTRIBUTOR</small>			
<p>Erni MaxiBridge Connectors</p>	<p>YMT Series</p>	<p>YESC Series</p>	<p>Y-NEWT Series</p>
<ul style="list-style-type: none"> • Crimp contact for versatile uses • Single and dual row versions • Shock and vibration resistant • Based on VW75174 and USCAR-2 specifications 	<ul style="list-style-type: none"> • male and female connectors, headers and applicable terminals are available. • Suitable for a wire cross-section range from 0.13 mm² up to 1.5 mm². • The larger 2.8 mm cavity can be used up to 4.0 mm² for 2.8 mm terminals. 	<ul style="list-style-type: none"> • Blade Sizes ; 0.64X0.64, 1.5X0.8, 2.8X0.8, 6.3X0.8, 9.5X1.2 • USCAR/ISO Blade Sizes Compatibility • Sealed/Unsealed Product Availability 	<ul style="list-style-type: none"> • Robust design with increased mating durability • PBT GF, Flammability class UL94-V0 • Sealing Class IPX9K
			

Relays



			
<p>DCNEV Series</p>	<p>DCNEVT500</p>	<p>G9EJ Precharge Relay</p>	<p>G2RL-1A</p>
<ul style="list-style-type: none"> • High current (250A) and voltage (900V) contactor • Coil enonomizer reduces power and heating • Sealed IP67, gas-filled relay 	<ul style="list-style-type: none"> • 1.800VDC and 500A • 360KW power switch capable, maximum short circuit 4,000A, 1 second 	<ul style="list-style-type: none"> • Capable of switching 400V 25A DC loads, a high capacity interruption through the function of extinction of magnetic arc by adopting high-efficiency magnetic circuit 	<ul style="list-style-type: none"> • Single pole, double pole, high-capacity (16 A) and high-sensitivity types (250 mW) • IEC/EN 60335-1 conformed. (-HA Model) • Up to 85°C and 105°C (-CV Model).
			
			
<p>G2RL-2A</p>	<p>G2RG-2A</p>	<p>EV Series (10A...300A)</p>	<p>PhotoMOS® AQP258HAX</p>
<ul style="list-style-type: none"> • Single pole, double pole, high-capacity (16 A) and high-sensitivity types (250 mW) • IEC/EN 60335-1 conformed. (-HA Model) • Up to 85°C and 105°C (-CV Model). 	<ul style="list-style-type: none"> • Power Relay with 110 VDC 5 A • Switching Capacity (Use 2 poles in series with 3 mm contact gap) • 2.8-mm contact gap (EN50091-1) 	<ul style="list-style-type: none"> • High cut-off and short circuit capability up to 8,000A by inert gas for arc extinction 	<ul style="list-style-type: none"> • 1.500VDC, 20mA, for HV battery and insulation monitoring in automotive applications
			
			
<p>HE-S Series</p>	<p>HE-R Series</p>	<p>HVC27 Series</p>	<p>HVC43 Series</p>
<ul style="list-style-type: none"> • High-capacity • Max. switching current: 40 A • Compact size • Low operating power: 1,880 mW (holding power: 170 mW) 	<ul style="list-style-type: none"> • High-capacity • Mirror contact mechanisms (Compliant with IEC60947-4-1) • PCB Terminals • Low operating power: 4.0 W (Holding power 0.49 W) 	<ul style="list-style-type: none"> • 1200VDC relay, for 200A, 300A, 500A • Bi-directional, dual-coil & aux contact available 	<ul style="list-style-type: none"> • New 1000VDC relay for 150A, 200A, 250A • Single Coil • Mechanical Contact • Bidirectional design and very compact size
			

Relays

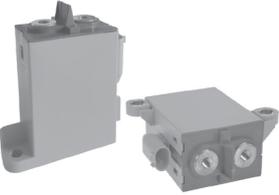		 <small>AUTHORIZED DISTRIBUTOR</small>	 <small>AUTHORIZED DISTRIBUTOR</small>
<p>HVC45 Series</p>	<p>HVC50 Series</p>	<p>EVC50 and EVC80</p>	<p>EVC 135 Series</p>
<ul style="list-style-type: none"> • 1000V DC, Up to 300A DC • Single Coil • Mechanical Contact • Bidirectional design 	<ul style="list-style-type: none"> • 1500V DC, Up to 600A DC • Dual Coil • Mechanical Contact • Bidirectional design 	<ul style="list-style-type: none"> • Limiting continuous current 50A or 80A at 85°C. • Suitable for 450VDC with limited capability to 600VDC 	<ul style="list-style-type: none"> • Limiting continuous current 135A at 85°C • Hermetically sealed • UL approved
			
 <small>AUTHORIZED DISTRIBUTOR</small>	 <small>AUTHORIZED DISTRIBUTOR</small>	 <small>AUTHORIZED DISTRIBUTOR</small>	 <small>AUTHORIZED DISTRIBUTOR</small>
<p>EVC 175 Series</p>	<p>EVC250</p>	<p>EVC 500 Series</p>	<p>KILOVAC EV200</p>
<ul style="list-style-type: none"> • Compact high voltage main contactor • Voltage rating up to 450VDC • Current up to 175A at 85°C • Short circuit carry currents up to 5kA 	<ul style="list-style-type: none"> • Continuous current rating of 250A • Simplified design of the EVC 250 with optimized parts allows fully automatic production 	<ul style="list-style-type: none"> • 500 Amp continuous current rating • Voltage rating (max): 900 VDC • 12kV of isolation between open contacts • Hermetically sealed 	<ul style="list-style-type: none"> • 500A, 900VDC • economizer included • Meets IEC 60947- 4-1 annex f mirror contact
			
 <small>AUTHORIZED DISTRIBUTOR</small>	 <small>AUTHORIZED DISTRIBUTOR</small>	 <small>AUTHORIZED DISTRIBUTOR</small>	 <small>AUTHORIZED DISTRIBUTOR</small>
<p>Kilovac K1K Series</p>	<p>Kilovac K250 Series</p>	<p>Kilovac LEV100H</p>	<p>Mini K HV Precharge Relay</p>
<ul style="list-style-type: none"> • 1.000VDC, 1.000A unique relay in the market in one housing 	<ul style="list-style-type: none"> • Contact Voltage Rating: 1000 VDC Max • Contact Current Rating: 250 A • Contact Form: Form X (SPST-NO) • Hermetically sealed 	<ul style="list-style-type: none"> • 150A, 1000V DC • Auxiliary contacts 	<ul style="list-style-type: none"> • For pre-charge currents up to 20A • Available with PCB and plug-in terminals • IEC 60664 compliant
			

Sensors



<p>Amphenol Advanced Sensors</p>	<p>Amphenol Advanced Sensors</p>	<p>Amphenol Advanced Sensors</p>	<p>Amphenol Advanced Sensors</p>
<p>GE-209X Pressure and Temperature Combi Sensor</p> <ul style="list-style-type: none"> • Pressure and temperature measurements in one sensor assembly. • Ideal for EV and industrial applications. 	<p>BAF147B002 Coolant leak detection sensor</p> <ul style="list-style-type: none"> • Battery pack leak detection sensor for use with water-based liquid cooling systems. 	<p>Inline flow-through fluid temp sensor</p> <ul style="list-style-type: none"> • For heat exchange and EV battery pack coolant systems. 	<p>JS8845 INTEGRATED PIPE CLIP TEMP SENSOR</p> <ul style="list-style-type: none"> • Measuring the surface temp of metal tubing used in heating/cooling systems. • AEC 200 qualified.
			
<p>Amphenol Advanced Sensors</p>	<p>Amphenol Advanced Sensors</p>	<p>Amphenol Advanced Sensors</p>	<p>Amphenol Advanced Sensors</p>
<p>WTF083B001 Threaded coolant temp sensor</p> <ul style="list-style-type: none"> • Sensor for threaded ports, optimised for battery pack liquid coolant systems. 	<p>CTTS-203856-S02 Type FL low profile temp sensor</p> <ul style="list-style-type: none"> • Type FL low profile and contour-conforming temperature sensor for EV battery pack temperature monitoring. • AEC 200 qualified. 	<p>A-1737 MOTOR COIL TEMPERATURE SENSOR</p> <ul style="list-style-type: none"> • For monitoring the temperature of windings in EV/HEV and industrial motors. 	<p>ZTP-148SR Analogue output IR temp sensor</p> <ul style="list-style-type: none"> • Non-contact surface temperature sensor suitable for many monitoring applications such as electrical connections in EV chargers.
			
			<p>PIHER <i>sensing systems</i> an Amphenol® company</p>
<p>H2-High Pressure Sensor HPS</p>	<p>VST Temperature Sensor</p>	<p>CCT pressure/temperature sensors</p>	<p>HCSP-1BS SINGLE-PHASE OPEN LOOP CURRENT SENSORS</p>
<ul style="list-style-type: none"> • High pressure tanks and reservoirs • Filling and refueling stations • Measure and testing technology 	<ul style="list-style-type: none"> • H2 applications and special media • Cooling-water systems • Fuel cell systems 	<ul style="list-style-type: none"> • Climate control system in vehicles with alternative drives • Heat pump • Thermal management (battery) • Compact size and minimal weight 	<ul style="list-style-type: none"> • Busbar mount • Simple / dual analog ratiometric output • ±200A to ±1500A • Galvanic separation between power and control
			



<p>PIHER <i>sensing systems</i> an Amphenol® company</p>	<p>PIHER <i>sensing systems</i> an Amphenol® company</p>	<p>PIHER <i>sensing systems</i> an Amphenol® company</p>	<p>PIHER <i>sensing systems</i> an Amphenol® company</p>
<p>HCSP-3BS THREE-PHASE CURRENT SENSORS FOR TRACTION INVERTER</p>	<p>HCSO-1W WIRE MOUNT AUTOMOTIVE OPEN LOOP HALL EFFECT CURRENT SENSOR</p>	<p>SSH-G01 SPEED AND DIRECTION SENSOR FOR TRANSMISSION GEAR SPEED</p>	<p>PSCI High Speed e-Motor Rotor Position Sensor</p>
<ul style="list-style-type: none"> • Busbar mount • 3 simple analog ratiometric outputs • Current values: Up to 1200A • Compatibility with Infineon HybridPack • Press fit contact 	<ul style="list-style-type: none"> • Cable mount • Simple / dual analog ratiometric output • Current values: ±25A to ±1000A • Dual channel high/low current 	<ul style="list-style-type: none"> • Speed and direction • Fast and near zero speed sensing capable • Compact and rugged • Resistant to moist and high vibration environments 	<ul style="list-style-type: none"> • Up to 200k rpm • Demodulated sine-cosine output / no converter needed • Strayfield immunity • Lightweight and compact
			
<p>SGX <i>SENSORTECH</i></p>	<p>SGX <i>SENSORTECH</i></p>	<p>Honeywell</p>	<p>Honeywell</p>
<p>SGX-BLD1, BLD2 Hydrogen and EV battery gas leak detection sensor</p>	<p>SGX-TRDU5 Hydrogen and Battery Leakage Detection Sensor</p>	<p>SNG-S Series Speed Sensors</p>	<p>BAS Series Battery Safety Sensors</p>
<ul style="list-style-type: none"> • Automotive product • Fast response time (<1 second) • Thermal conductivity gas sensor • High H2 range detection from 0 up to 10% • CO gas sensor (BLD2 only) 	<ul style="list-style-type: none"> • Temperature range: -40°C to 140°C • Insensitive to angular rotation during assembly • Moisture ingress protection rated to IP69K 	<ul style="list-style-type: none"> • Temperature range: -40°C to 140°C • Insensitive to angular rotation during assembly • Moisture ingress protection rated to IP69K 	<ul style="list-style-type: none"> • Detects particulate matter such as smoke, drops of liquid, dirt in Lithium-ion battery packs • Two operating modes allows battery monitoring in low power mode
			
<p>Honeywell</p>	<p>Honeywell</p>	<p>Honeywell</p>	<p>Littelfuse</p>
<p>BPS series Battery Safety Sensors</p>	<p>CSHV Series open loop current sensors</p>	<p>CSNV700 Series Flux Gate Current Sensors</p>	<p>54100 and 54140 Series TMR Sensor</p>
<ul style="list-style-type: none"> • Settable warning threshold for customization to fit end application operating conditions • Two operating modes allows battery monitoring in low power mode 	<ul style="list-style-type: none"> • Different sensing ranges: ±100A to ±1500A • precise battery state measurement • easy integration into different magnetic environments. 	<ul style="list-style-type: none"> • Different sensing ranges: ±700A • precise battery state measurement • easy integration into different magnetic environments 	<ul style="list-style-type: none"> • Magnetically operated position sensor • Operation with north or south pole • Digital switching • High Sensitivity
			

Sensors, Power & Passives




			
<p>TTape™ Distributed Temperature Monitoring</p>	<p>TAS Series High-Precision TMR Angle Sensors with Analog Output</p>	<p>TAD Series High-Precision TMR Angle Sensors with Digital Output</p>	<p>Pressure Sensor MiniCell™</p>
<ul style="list-style-type: none"> • Simple integration with existing BMS solutions complementing NTCs • No calibration or temperature look-up tables needed • AEC-Q200 qualified 	<ul style="list-style-type: none"> • Specialized angle sensor for use under harsh environmental conditions. • High reliability and low FIT rates allow operation in safety-critical applications 	<ul style="list-style-type: none"> • TAD2141: TMR Sensor with integrated signal processor unit • TAD 4140: Dual, independent TMR Sensors with integrated signal processor units 	<ul style="list-style-type: none"> • Robust design • High accuracy • Suitable for aggressive liquids and gases • Differential pressure measurement
			
			
<p>Pressure Sensor AFA</p>	<p>300 Series Epoxy Glass RTD Sensors</p>	<p>MGJ1 and MGJ2 Series DC/DC Converters</p>	<p>PPH Snubber Capacitor</p>
<ul style="list-style-type: none"> • Pressure Range from 1bar to 11bar • Rugged, screw-in design • Suitable for non-freezing media • Absolute pressure measurement 	<ul style="list-style-type: none"> • Rectangular, flat, laminated stator stick • Easily inserted between coils in stator of motor • Maximum temperature 155°C 	<ul style="list-style-type: none"> • 1W and 2W SMD gate drive DC-DC converters • AECQ104 – pending • Ideal for driving IGBT and SiC MOSFET 	<ul style="list-style-type: none"> • 1µF capacitance rating • 600VAC voltage rating • 800A peak current • 2400A surge current
			
			
<p>AEC-Q200 compliant Inductors and Transformers</p>	<p>CSS Series High Power Current Sense Resistors</p>	<p>HCT Trasnformer</p>	<p>HCM1A-V2 High Current inductors</p>
<ul style="list-style-type: none"> • Excellent long term stability • Low inductance • Low thermal EMF • AEC-Q200 compliant 	<ul style="list-style-type: none"> • Excellent long term stability • Low inductance • Low thermal EMF • AEC-Q200 compliant 	<ul style="list-style-type: none"> • Toroid core for high coupling and low radiation • Complies with IEC/UL 60664-1 and IEC/UL 62368-1 • AEC-Q200 compliant 	<ul style="list-style-type: none"> • Novel core material and automated process • AEC-Q200 G1 (2100hrs at 155C, ESD HBM 8kV, up to 30g vibration) • Low DCR and low core loss
			





<p>UN ECE R10 and R100 qualified Supercap Modules</p>	<p>Hi Voltage MLCC</p>	<p>KC Link Cap</p>	<p>Anti Surge Resistors</p>
<ul style="list-style-type: none"> • Highest power and energy density on the market • IP65 Ruggedized construction • UN ECE R10 and R100 qualified 	<ul style="list-style-type: none"> • Safety capacitors with 305Vac rating • Safety capacitors with 1kVdc rating • Includes 1812 Y2 safety capacitor 	<ul style="list-style-type: none"> • Standard and large size MLCCs, up to 3KV • StackiCap™ high CV high-voltage capacitors • Safety certified MLCCs, AC DC dual rated 	<ul style="list-style-type: none"> • Outstanding pulse performance (SG73, SG73P, SG73G) • Excellent in ESD characteristics (SG73, SG73S) • High component and equipment reliability
<p>Metal Plate Shunt Resistors</p>	<p>TCO Polymer</p>	<p>TCQ Polymer</p>	<p>Automotive MLCC</p>
<ul style="list-style-type: none"> • 0.5mΩ to 20mΩ • 1W (0805 inch) to 5W (2512 inch) • Current ratings up to 100A • T.C.R.: ±50 / ±75ppm/K • 0.6... 0.7mm low profile height 	<ul style="list-style-type: none"> • Conductive polymer electrode • Robust design for automotive applications • Meets requirements of AEC-Q200 • -55 to +150°C operation temp. 	<ul style="list-style-type: none"> • 175°C rated, with no derating • AEC-Q200 qualified • Bi-Directional transient voltage protection • EMI/RFI attenuation 	<ul style="list-style-type: none"> • AEC-Q200 qualified • Plated with nickel/tin finish • Made with high-purity ceramics • Highly reliable
<p>Thermal Interface Products</p>	<p>Aluminium Polymer</p>	<p>Current Sensing Module</p>	<p>AUMOV® Series Varistors Series</p>
<ul style="list-style-type: none"> • Thermal Interface Materials (TIMs) conduct heat between two or more solid mating surfaces. • They improve heat transfer between them and enhance the efficiency of the thermal management system. 	<ul style="list-style-type: none"> • +105°C operating temperature ceiling, assured for 2000 hours • 4.4mm to 12.7mm lengths available • 3µA to 3200µA leakage currents available 	<ul style="list-style-type: none"> • 5KV galvanic isolation • IP40-compliant housing design • CAN2.0B interface isolated, 120Ω internal terminated 	<ul style="list-style-type: none"> • Complies with 1000 cycle, -55°C to 125°C, thermal shock cycling test • Wide operating voltage range • Three disc sizes available: 10mm, 14mm and 20mm






			 <small>INNOVATOR IN ELECTRONICS</small>
<p style="text-align: center;">Auto PPTC</p>	<p style="text-align: center;">HC 20EV Series High Current Fuse</p>	<p style="text-align: center;">Nano Fuse</p>	<p style="text-align: center;">Low ESL MLCC</p>
<ul style="list-style-type: none"> • AEC-Q200 qualified, RoHS compliant, and ISO/ TS16949 certified • Surface-mount form factor • High performance • Small footprint – 1812 size 	<ul style="list-style-type: none"> • Interrupting rating: 16kA at 500VDC • Voltage rating: 500VDC • Current ratings 60 – 125A • M6 bolt-down terminals 	<ul style="list-style-type: none"> • Meets AEC-Q200 automotive qualifications • Operating temperature range from -40°C to 85°C • Small size/surface mountable type 	<ul style="list-style-type: none"> • Low ESL • Allows a reduction in the number of components • Contributes to noise suppression
			
 <small>INNOVATOR IN ELECTRONICS</small>	 <small>INNOVATOR IN ELECTRONICS</small>	 <small>MORE POWER TO YOU</small>	 <small>ELECTRONIC COMPONENTS</small>
<p style="text-align: center;">Power Inductors</p>	<p style="text-align: center;">Automotive Resonator Crystal</p>	<p style="text-align: center;">Common Mode Chokes</p>	<p style="text-align: center;">High Power SMD Fuse</p>
<ul style="list-style-type: none"> • Wire wound metal alloy type for automotive power lines • Wire wound ferrite type for automotive power lines 	<ul style="list-style-type: none"> • AEC-Q200 • SMD device • 2.0mm x 1.6mm in dimension (LxW) • 50.0000MHz frequency 	<ul style="list-style-type: none"> • Low magnetic leakage flux • Excellent winding insulation • Broad range of inductance ratings • Horizontal and vertical orientations 	<ul style="list-style-type: none"> • High breaking capacity • Safe tripping in 15s at twice the rated current • High operating temperature range
			
			 <small>INDUSTRY</small>
<p style="text-align: center;">Common Mode Chokes</p>	<p style="text-align: center;">PCM Solid Aluminium Capacitor</p>	<p style="text-align: center;">GYE Hybrid Capacitor</p>	<p style="text-align: center;">ERJB Series</p>
<ul style="list-style-type: none"> • Wide variety of package sizes available • 2.8Arms to 20Arms current rating range • 94µH to 1.8mH inductance range 	<ul style="list-style-type: none"> • High reliability, low ESR, high ripple current • 8000 hours life at +125°C • SMD type, lead-free reflow soldering condition at +260°C peak 	<ul style="list-style-type: none"> • High reliability, low ESR, and high ripple current • Long life of 4000 hours at 125°C, high-capacitance • AEC-Q200 compliant 	<ul style="list-style-type: none"> • Separated resistive elements for surge distribution • Achieves small size and high power and overload characteristics
			


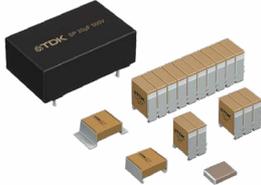


<p>Panasonic INDUSTRY</p>	<p>Panasonic INDUSTRY</p>	<p>Panasonic INDUSTRY</p>	<p>SAMSUNG SAMSUNG ELECTRO-MECHANICS</p>
<p>ZE Hybrid Cap</p>	<p>ZKU Hybrid Cap</p>	<p>ZS Conductive Polymer</p>	<p>High Voltage MLCC</p>
<ul style="list-style-type: none"> • Low leakage current • Operating temperature range: -55°C to +145°C • High rated voltage range: 25 to 63 VDC • RoHS / REACH compliant 	<ul style="list-style-type: none"> • 39µF up to 560µF • Endurance rating 4000 hours at 125°C • Operating temperature -55°C to + 125°C • Rated voltage 25VDC / 35VDC 	<ul style="list-style-type: none"> • Surface mount package • 4000 hour life at 125°C • High ripple current and large capacitance • Vibration proof variants available on request 	<ul style="list-style-type: none"> • Normal type (epoxy) • 1206 case size • Excellent DC bias characteristics • AEC-Q200 qualified
			
<p>SAMSUNG SAMSUNG ELECTRO-MECHANICS</p>	<p>TDK</p>	<p>TDK</p>	<p>TDK</p>
<p>High Temperature Powertrain MLCC</p>	<p>Ceralink Cap</p>	<p>CGA and CKG MLCC</p>	<p>DC Link Cap</p>
<ul style="list-style-type: none"> • Powertrain high-temperature solution • Normal type (epoxy) • 0805, 1206, and 1210 sizes • Excellent DC bias characteristics 	<ul style="list-style-type: none"> • Rated voltages from 500V DC to 900V DC • Capacitance range from 0.25µF to 20µF • Ideal for high currents and in combination with SiC or GaN 	<ul style="list-style-type: none"> • Low self-heating and high ripple resistance due to low ESR • AEC-Q200 compliant 	<ul style="list-style-type: none"> • High reliability for severe ambient conditions • Long life – 50.000h (85°C, rated voltage) • AEC-Q200 qualified capacitors available on request
			
<p>TDK</p>	<p>TDK</p>	<p>TDK</p>	<p>TT Electronics</p>
<p>ESD Protection</p>	<p>NTC Thermistor</p>	<p>SMD Varistor</p>	<p>Metal Shunt Resistors</p>
<ul style="list-style-type: none"> • European factory (fast and flexible) • Short lead-times • Wide product portfolio • AEC-Q200 certified 	<ul style="list-style-type: none"> • Type families qualified acc. to AEC Q200 • Robust design for high-voltage applications • NTC families with standard lead spacing design 	<ul style="list-style-type: none"> • Transient protection acc. to ISO 7637-2 and 16750-2 • ESD protection acc. to IEC 61000-4-2 • AEC-Q200 certified 	<ul style="list-style-type: none"> • Precision to 1% and 100ppm/K • Inductance <5nH • Thermal EMF <1µV/K • Value range 50 to 250µΩ • Power rating 36W
			

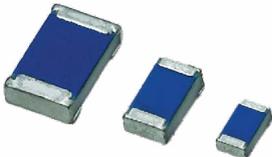





	 The DNA of tech.	 The DNA of tech.	 The DNA of tech.
Moulded Power Inductors	IHLD Inductors	IHLE Inductors	MC HP High Power Thin Film Resistors
<ul style="list-style-type: none"> • HM72L up to +125°C/HA72L up to +155°C • HA72L: AEC-Q200 certified • Up to 80A maximum current • 3Mhz frequency performance • Low core loss 	<ul style="list-style-type: none"> • Two IHLP® style inductors placed vertically in one board-space saving package • AEC-Q200 qualified • Two sizes available: 3232 and 4032 	<ul style="list-style-type: none"> • Integrated e-shields reduce EMI • High temp. operation to +155°C • AEC-Q200 qualified • Coplanarity of their four terminal $\leq 100\mu\text{m}$ 	<ul style="list-style-type: none"> • Available in case sizes 0402, 0603, and 0805 • Rated dissipation up to 0.4W for case size 0805 • Operating temperature up to 175°C
			
 The DNA of tech.			 a YAGEO company
Power Metal Plate™ Shunts	AS Series MLCC	Auto Grade Surge Resistors	Auto Grade Y2 Cap
<ul style="list-style-type: none"> • Very low inductance 0.5nH to 5 • Excellent frequency response to 50MHz • Low thermal EMF ($< 3\mu\text{V}/^\circ\text{C}$) • AEC-Q200 qualified 	<ul style="list-style-type: none"> • AEC-Q200 qualified and PPAP ready • IATF 16949 certified • Board flex $\geq 5\text{ mm}$ • 100% AOI & SPC monitor 	<ul style="list-style-type: none"> • AEC-Q200 qualified and PPAP ready • IATF 16949 certified • Board flex $\geq 5\text{ mm}$ • 100% AOI & SPC monitor 	<ul style="list-style-type: none"> • Approvals: ENEC, uL, cUL, CQC • Class Y2/X1 (IEC 60384-14) • TURAC /1,500 V URDC acc. to IEC 60384-14 • Self-healing properties
			
 a YAGEO company	 a YAGEO company	 a YAGEO company	 A YAGEO Company
COG MLCC	KC Link Cap	METCOM Inductors	PM2155 Series
<ul style="list-style-type: none"> • Industry-leading CV values • High volumetric capacitance with low leakage current • High thermal stability • High ripple current capability • Automotive grade available 	<ul style="list-style-type: none"> • EIA 1812, 2220, and 3640 case size • AEC-Q200 automotive qualified • Flexible termination option available 	<ul style="list-style-type: none"> • AEC-Q200 qualified • High efficiency inductor • Metal composite powder • Shielded construction • Low magnetic flux leakage 	<ul style="list-style-type: none"> • Push pull converter transformer IEC 62368 and 61558 basic Insulation compliant • 12mm creepage • 4kVrms isolation (600Vrms continuous)
			

Discrete Semiconductors

<p>BOURNS®</p>	<p>BOURNS®</p>	<p>BOURNS®</p>	<p>Littelfuse®</p>
<p>5.0SMDJ-Q TVS-Series 5kW in SMC Package</p>	<p>CDSOT23-T24CAN-Q CANbus Protectors</p>	<p>TBU-DB055-100-WH-Q High-Speed Protectors</p>	<p>150V AECQ Ultra Junction Power MOSFETs</p>
<ul style="list-style-type: none"> • Surface mount SMC package • Standoff voltage: 5 to 170 volts • Peak Pulse Power: 5000 watts • AEC-Q101 compliant 	<ul style="list-style-type: none"> • Single device for two I/O lines • Low capacitance for high-speed CANbus • AEC-Q101 compliant 	<ul style="list-style-type: none"> • Superior circuit protection • Blocks surges up to rated voltage limit • High-speed performance • Small SMT package 	<ul style="list-style-type: none"> • AEC-Q101 Qualified • Low on-resistance RDS(ON) and gate charge Qg • dv/dt ruggedness • Avalanche capability
			
<p>Littelfuse®</p>	<p>Littelfuse®</p>	<p>Littelfuse®</p>	<p>Littelfuse®</p>
<p>IX4340 5A, Dual Low-Side MOSFET Driver</p>	<p>IX4351NE SiC MOSFET and IGBT Driver</p>	<p>IXTY2P50PA P-Ch -500V, 2A MOSFET</p>	<p>Pxxx0S3N-A - AECQ High Surge Current SIDACTor</p>
<ul style="list-style-type: none"> • Two independent drivers, each capable of sourcing and sinking 5A • CMOS and TTL compatible inputs 	<ul style="list-style-type: none"> • Separate 9A peak source and sink outputs • Internal charge pump regulator for selectable negative gate drive bias • Thermal shutdown 	<ul style="list-style-type: none"> • AEC Q101 Qualified • Avalanche Rated • Rugged PolarPTM Process • Low Package Inductance • Easy to Mount 	<ul style="list-style-type: none"> • AEC-Q101 qualified • High surge rating 8/20 μs 3000 A protection • DO-214AB package • Low voltage overshoot & Low on-state voltage
			
<p>Littelfuse®</p>	<p>Littelfuse®</p>	<p>PANJIT SEMI CONDUCTOR</p>	<p>PANJIT SEMI CONDUCTOR</p>
<p>SZ1SMB Series 600W in SMB Package</p>	<p>SZSMF4L Series - AECQ TVS Diode in SOD-123FL</p>	<p>MER2DAL-AU SMD Super Fast Recovery Rectifier</p>	<p>PJEC2415VM1WS-AU ESD Protection Diode</p>
<ul style="list-style-type: none"> • Zener transient overvoltage suppressors • Peak power – 600W at 1ms • ESD rating of class 3 (>1 kV) per human body model 	<ul style="list-style-type: none"> • Working peak reverse voltage range 5V to 78V for uni-directional • range 10V to 78V for bi-directional • Peak power: 400 watts @ 1 ms 	<ul style="list-style-type: none"> • Superfast recovery times-epitaxial construction • Low forward voltage, high current capability • Low leakage • AEC-Q101 qualified 	<ul style="list-style-type: none"> • Bidirectional ESD protection of one line • Low leakage current maximum of 0.05A at rated voltage • AEC-Q101 qualified
			

Discrete Semiconductors

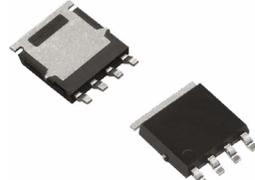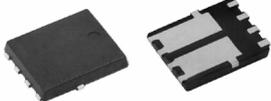

	<p style="text-align: center;">TOSHIBA</p>	<p style="text-align: center;">TOSHIBA</p>	 <small>The DNA of tech.</small>
<p>PJQ5540V-AU - 40V N-CH Enhancement Mode MOSFET</p> <ul style="list-style-type: none"> • RDS(ON), VGS@10V, ID@20A<2.1mΩ • Excellent FOM • Standard Level Drive • AEC-Q101 qualified 	<p>TLX9175J Photo Coupler</p> <ul style="list-style-type: none"> • Normally open (1-Form-A) device • Peak off-state voltage: 600V (min) • Trigger LED current: 3mA (max) • AECQ101 qualified 	<p>TLX9906 Photo Coupler</p> <ul style="list-style-type: none"> • MOSFET gate driver • Isolation voltage: 3750Vrms (min) • Operating temp. -40 to 125°C • AECQ101 qualified 	<p>AEC-Q101 Qualified DFN-Packaged Rectifiers</p> <ul style="list-style-type: none"> • Wettable flanks - DFN3820A package • 1A to 5A forward current range • 200V, 400, or 600V repetitive peak reverse voltage options
			
 <small>The DNA of tech.</small>	 <small>The DNA of tech.</small>	 <small>The DNA of tech.</small>	 <small>The DNA of tech.</small>
<p>R3T2FPHM3/I - Hybrid Rectifier and TVS</p> <ul style="list-style-type: none"> • Automotive two-in-one solution for rectifier and TVS • Oxide planar chip junction • AEC-Q101 qualified available 	<p>SQJ444EP Automotive N-Channel 40V MOSFETs</p> <ul style="list-style-type: none"> • TrenchFET® power MOSFET • AEC-Q101 qualified • 100% Rg and UIS tested 	<p>SQJA80EP Automotive N-Channel 80V MOSFETs</p> <ul style="list-style-type: none"> • TrenchFET® power MOSFET • AEC-Q101 qualified • 100% Rg and UIS tested 	<p>SQJA81EP AECQ Grade P-Channel 80V MOSFET</p> <ul style="list-style-type: none"> • Maximum on-resistance, 17.3mΩ at 10V • Gate charge down to 52nC at 10V • Compact 5.13mm by 6.15mm PowerPAK® SO-8L
			
 <small>The DNA of tech.</small>	 <small>The DNA of tech.</small>	 <small>The DNA of tech.</small>	 <small>The DNA of tech.</small>
<p>TA6F6 Series SMD PAR® TVS</p> <ul style="list-style-type: none"> • Very low profile - typical height of 0.95 mm • TJ = 185 °C capability • Excellent clamping capability • AEC-Q101 qualified 	<p>VOMDA1271-AECQ MOSFET Driver</p> <ul style="list-style-type: none"> • AEC-Q102 qualified • Isolation test voltage 3750 VRMS • Operating temperature from -40 °C to +125 °C 	<p>VS-1EFH02HM3 Hyperfast Rectifier, 1A FRED Pt®</p> <ul style="list-style-type: none"> • Specified for output and snubber operation • Low forward voltage drop • Low leakage current 	<p>VS-8DKH02HM3 Hyperfast Rectifier, 2x4 A</p> <ul style="list-style-type: none"> • Hyperfast recovery time, reduced Qrr, soft recovery • 175°C max operating junction temperature • Specific for output and snubber operation
			



The IP&E Specialist

ezBuy

*Buy now,
Pay with agreed terms*

Advanced Parts Search Functionally

Search by TTI Manufacturer part number or your contracted internal part numbers.

Contract or VIP Pricing

Quickly access your contract or VIP pricing.

No Credit Cards Needed


TTI pre-fills your billing and shipping information for faster checkout.



TTI Europe Webshop

The **deepest** and **broadest** IP&E inventory at just one click.

*For all your IP&E requirements
In one place ... Available 24/7*

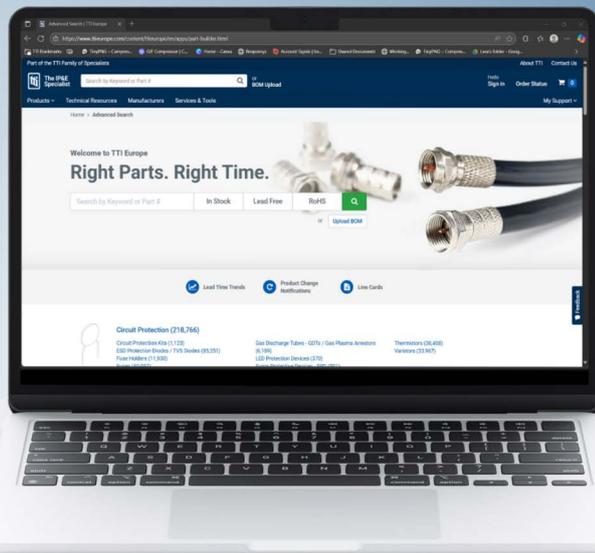

Embark on a Journey through TTI's Literature



Explore our selection of Line Cards, Application and Product Guides in Transportation, Industrial, and Defense-Aerospace-Space.

EXPLORE NOW



Stay informed with our Newsletter!

Discover the forefront of electronic components, cutting-edge technologies, and revolutionary applications across industries such as transportation, industrial, defense and aerospace, and beyond.



SUBSCRIBE NOW



Stay Connected with Us on Social Media!



www.ttieurope.com



The IP&E
Specialist



**The IP&E
Specialist**



Contact TTI today to see
what a true specialist can offer.

Corporate Headquarters

TTI, Inc.
2441 Northeast Parkway, Fort Worth, Texas 76106 U.S.A.
T: +1 817 740 9000 | F: +1 817 740 9898
E: information@ttiinc.com

European Headquarters

TTI, Inc.
Ganghoferstr. 34, 82216 Maisach-Gernlinden Germany
T: +49 (0) 81 42 66 80 0 | F: +49 (0) 81 42 66 80 490
E: sales@de.ttiinc.com

European Sales Offices

Austria

Vienna
T: +43 (0) 18 79 85 90
E: sales.vienna@at.ttiinc.com

Belgium

Gent
T: +32 9 274 0670
E: sales.belux@nl.ttiinc.com

Bulgaria

Varna
T: +359 52 51 10 59
E: sales.varna@bg.ttiinc.com

Czech/Slovak Republic

Brno
T: +420 541 126 714
E: sales.brno@cz.ttiinc.com

Denmark

Brøndby
T: +45 (0) 43 29 35 35
E: sales.copenhagen@dk.ttiinc.com
Risskov
T: +45 (0) 38 41 31 00
E: sales.copenhagen@dk.ttiinc.com

Estonia

Tallinn
T: +372 664 81 00
E: sales.estonia@ee.ttiinc.com

Finland & Baltic Region

Espoo
T: +358 98 94 65 200
E: sales.finland@fi.ttiinc.com

France

Brive
T: +33 (0) 5 55 92 92 93
E: sales.france@fr.ttiinc.com
Bron
T: +33 (0) 472 81 2030
E: sales.lyon@fr.ttiinc.com
Bruz
T: +33 (0) 2 99 77 60 84
E: sales.rennes@fr.ttiinc.com
La Ciotat
T: +33 (0) 442 84 4142
E: sales.marseille@fr.ttiinc.com
Montigny Le Bretonneux
T: +33 (0) 130 13 7380
E: sales.paris@fr.ttiinc.com

Germany

Berlin
T: +49 (0) 30 8877 40 200
E: sales.berlin@de.ttiinc.com
Dortmund
T: +49 (0) 2301 91 304 0
E: sales.dortmund@de.ttiinc.com
Frankfurt
T: +49 (0) 6102 5999 100
E: sales.frankfurt@de.ttiinc.com
Hanover
T: +49 (0) 5 11 7 80 59 0
E: sales.hannover@de.ttiinc.com
Munich
T: +49 (0) 81 42 66 80 110
E: sales.munich@de.ttiinc.com
Pforzheim
T: +49 (0) 7231 14788 0
E: sales.stuttgart@de.ttiinc.com

Hungary

Budapest
T: +36 1 40 22 111
E: sales.budapest@hu.ttiinc.com

Ireland

T: +44 (0)1494 460000
E: sales.ireland@ie.ttiinc.com

Israel/Ray-Q Ltd.

Airport City
T: +972 3 975 3333
E: sales@ray-q.com

Italy

Civitanova Marche
T: +39 0733 81 8655
E: sales.milan@it.ttiinc.com
Florence
T: +39 (0) 55 094 63 76
E: sales.milan@it.ttiinc.com
Milan
T: +39 02 822 521
E: sales.milan@it.ttiinc.com
Naples
T: +39 081 4245719
E: sales.milan@it.ttiinc.com
Padova
T: +39 049 7802311
E: sales.milan@it.ttiinc.com
Rome
T: +39 0774 57 1302
E: sales.rome@it.ttiinc.com

Netherlands

Eindhoven
T: +31 (0) 40 290 1616
E: sales.belux@nl.ttiinc.com

Norway

Drammen
T: +47 (0) 92 66 87 66
E: sales.norway@no.ttiinc.com

Poland

Krakow
T: +48 605 475 479
E: sales.poland@pl.ttiinc.com
Kwidzyn
T: +48 55 279 67 57
E: sales.poland@pl.ttiinc.com

Portugal

Vila Nova de Famalicao
T: +351 252 493084
E: sales.barcelona@es.ttiinc.com

Romania

Cluj Napoca
T: +40 (0) 733 339 002
E: sales.romania@ro.ttiinc.com

South Africa

Pretoria
T: +27 86 111 2844
E: sales.southafrica@za.ttiinc.com

Spain

Barcelona
T: +34 (0) 93 645 25 75
E: sales.barcelona@es.ttiinc.com
Madrid
T: +34 (0) 91 416 11 90
E: sales.madrid@es.ttiinc.com
Vizcaya
T: +34 (0) 94 623 25 80
E: sales.bilbao@es.ttiinc.com

Sweden

Gothenburg
T: +46 (0) 31 741 12 90
E: sales.gothenburg@se.ttiinc.com
Stockholm
T: +46 (0) 8 594 11 800
E: sales.stockholm@se.ttiinc.com

Switzerland

Baar
T: +41 (0) 41 76741 90
E: sales.swiss@ch.ttiinc.com

Algeria, Egypt & Tunisia

T: +216 (0) 71 862 693
E: sales.tunis@fr.ttiinc.com

Morocco

T: +33(0) 555 92 92 93
E: sales.morocco@de.ttiinc.com

Turkey

Istanbul
T: +90 (0) 216 688 91 75 76
E: sales.turkey@tr.ttiinc.com

United Kingdom

High Wycombe
T: +44 (0)1494 460000
E: sales.london@uk.ttiinc.com
Manchester
T: +44 (0)161 872 2019
E: sales.london@uk.ttiinc.com

Resellers or Distributors

TTI Connect - Europe
T: +49 8142 6680 168
E: service@tticonnect.com

TTI, Inc. Headquarters Europe



www.tuev-sued.de/ms-zert



IECQ-P BSI 14.0013 (Germany)
IECQ-P BSI 14.0013-02 (Basildon)
www.iecq.org