



NEXT™ Truss

NEXT
Stage**LIFT**
BROCHURE



Introducing

NEXT StageLIFT

The StageLIFT D8plus range of NEXT is designed to meet more demanding expectations for higher safety in the entertainment industry. The hoists (motors) are available as D8 plus hoists in capacities from 250 – 1000 kg, with both direct and low voltage control.

The NSL StageLIFT is an electric chain hoist which is specifically developed, rated and designed for holding loads above people. It is light and compact in design and thus perfectly suited for mobile use. All components which are in the flow of forces are statically dimensioned for the double of the nominal rated capacity. D8 Plus motors are suitable for climbing and stationary hoists without any modifications. safety factor of minimum 8:1 in accordance with EN14492-2, IGVW SQP2:2018 and EN17206.



NEXT StageLIFT introduction

ROBUST BODY

NEXT stageLIFT hoists are engineered for the entertainment industry and feature a Lightweight Compact housing in robust aluminum casting with durable fiber-reinforced covers for very rough handling and challenging transportation. NEXT offers 3 body sizes to cover the D8 plus capacities of 250, 500, and 1000 kg.

D8 AND D8 PLUS HOISTS

In the standard finish, the motors are rated D8 plus. With a safety factor of a minimum 8:1 following EN14492-2, IGWV SQP2:2018, and EN17206. However, they can be delivered as conventional D8 hoists featuring single brake. Both motors are suitable for climbing and stationary hoists without any modifications.

SAFETY

All bearing components of the hoists are well protected against overload through a slip clutch. The hoists come with a steel chain guide plate to ensure jam-free chain feeding.

EASY TO SERVICE

All hoists are easy-to-maintain modular designed devices. Critical parts like the chain guide and load wheel, electronic board, brake, and motor, are easily accessible with standard tools. Resetting the slip clutch and inspecting the brake is simple and time-saving.

SLIP CLUTCH

The slip clutch is designed to guarantee a safe permanent connection between the load and the brake to meet higher safety requirements. Slip clutch setting screw is on the motor flange for an easy adjustment

EXTENDED LIFETIME

The maintenance-free gearbox is a solid enclosure for the entire lifetime of the hoist.

Meet the new entertainment hoist

BENEFITS & FEATURES

- Inverted application/ Standard or Self Climbing Suspension
- Swivel Body and Chain Hook, Eyebolt suspension optional
- Three body sizes for 250, 500 and, 1000 kg capacity
- Direct control as standard (optional low voltage control 24 V AC)
- Supply cable 0.5 m with red CEE 400 V 16A 4-pin plug
- Overload protection (safe: friction torque clutch outside the load force flow)
- 90% reduction of locking chains by usage of specially designed disentangle plate
- Black phosphated load chain, grade 80 steel. DAT according to DIN EN 818-7
- Robust durable fiber reinforced covers with double set ergonomic carry handles

ADAPTABLE EXTENSIONS*

- Low voltage control 24 V (AC) with limits
- Gear shaft for back-up limit switches or encoders

**only possible in production*

OPTIONAL*

- Direct control with limits
- Rain covers



NSL2.5

The NSL2.5 is a small but yet powerful StageLIFT, the NEXT StageLIFT is specially designed for use in the entertainment industry. It is engineered with a robust body that is fiber reinforced for rough handling and transportation. The load capacity is 250 kg.

All critical components such as chain guide, load wheel, electronic board, brake and motor are easily accessible for maintenance thanks to the modular design. To ensure high safety requirements, the slip clutch guarantees a safe permanent connection between the load and the brake.

THE ESSENTIALS

- Standard D8 Plus
- Light & compact
- Maintenance free gearbox
- Quality made in Germany by Yale

Technical specifications

Productcode	NSL2.5	NSL2.5
Length	385 mm	15.16 in
Width	206 mm	8.11 in
Height	133 mm	5.24 in
Height hook to hook	360 mm	14.17 in
Load capacity (D8 plus)	250 kg	551 lbs
Lifting speed at 50Hz	4 m/min	13 ft/min
Power at 50 Hz	0.25 kW	0.34 hp
Chain pitch	4,0 x 12,2 mm	0.15 x 0.48 in
Current at full load 230V, 50Hz	1,30 A	1.30 A
Current at full load 400V, 50 Hz	0,75 A	0.75 A
Weight without chain (body)	17 kg	37.5 lbs
Chain weight	0,35 kg/m	0.23 lb/ft

Optional

- Low voltage control 24 V (AC) with limits
- Direct control with limits



NSL5

The NSL5 is our medium sized StageLIFT, our NEXT StageLIFT is specially designed for use in the entertainment industry. This hoist has a load capacity of 500kg, and it is engineered with a robust body that is fiber reinforced for rough handling and transportation.

All critical components such as chain guide, load wheel, electronic board, brake and motor are easily accessible for maintenance thanks to the modular design. To ensure high safety requirements, the slip clutch guarantees a safe permanent connection between the load and the brake.

THE ESSENTIALS

- Standard D8 Plus
- Light & compact
- Maintenance free gearbox
- Quality made in Germany by Yale

Technical specifications

Productcode	NSL5	
Length	411 mm	16.18 in
Width	321 mm	12.68 in
Height	154 mm	6.06 in
Height hook to hook	405 mm	15.94 in
Load capacity (D8 plus)	500 kg	1.102 lbs
Lifting speed at 50Hz	4 m/min	13 ft/min
Power at 50 Hz	0.33 kW	0.45 hp
Chain pitch	5.6 x 17.0 mm	0.22 x 0.67 in
Current at full load 230V, 50Hz	1.50 A	1.50 A
Current at full load 400V, 50 Hz	0.87 A	0.87 A
Weight without chain (body)	28 kg	61.7 lbs
Chain weight	0,69 kg/m	0.46 lb/ft

Optional

- Low voltage control 24V (AC) with limits
- Direct control with limits

**D8
PLUS**

NSL10

The strongest in our range is the NSL10, this NEXT StageLIFT is specially designed for heavy-duty use in the entertainment industry. It is engineered with a robust body that is fiber reinforced for rough handling and transportation. The load capacity is 1.000 kg.

All critical components such as chain guide, load wheel, electronic board, brake and motor are easily accessible for maintenance thanks to the modular design. To ensure high safety requirements, the slip clutch guarantees a safe permanent connection between the load and the brake.

THE ESSENTIALS

- Standard D8 Plus
- Light & compact
- Maintenance free gearbox
- Quality made in Germany by Yale

Technical specifications



Productcode	NSL10	
Length	520 mm	20.47 in
Width	364 mm	14.33 in
Height	185 mm	7.28 in
Height hook to hook	500 mm	19.69 in
Load capacity (D8 plus)	1.000 kg	2.204 lbs
Lifting speed at 50Hz	4 m/min	13 ft/min
Power at 50 Hz	0.66 kW	0.9 hp
Chain pitch	8,0 x 22,0 mm	0.31 x 0.86 in
Current at full load 230V, 50Hz	2,90 A	2,90 A
Current at full load 400V, 50 Hz	1,70 A	1,70 A
Weight without chain (body)	47 kg	103.6 lbs
Chain weight	1,44 kg/m	0.97 lb/ft

Optional

- Low voltage control 24V (AC) with limits
- Direct control with limits

Dimensions of the models

Model	A	A1	A2	B	B1	B2	B3	C min.	C1	C2	C3	D	E	E1	F	F1	G	G1	H
NSL2.5	385	215	331	206	99	107	-	400	234	92	69	133	22	17	30	25	19	15	35
NSL5	411	212	357	279	157	122	42	540	273	111	81	154	22	-	30	-	19	-	35
NSL10	520	252	458	329	188	141	35	540	344	147	99	185	29	-	35	-	21	-	35

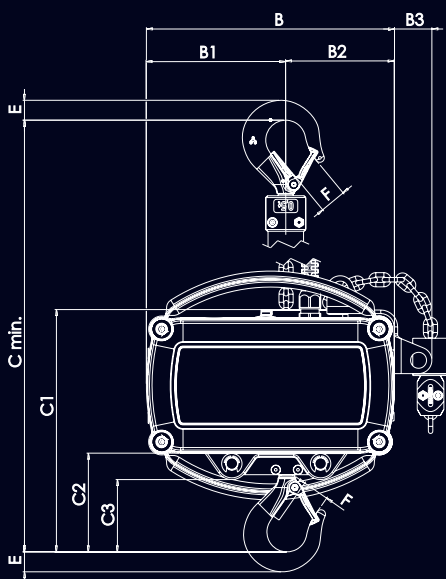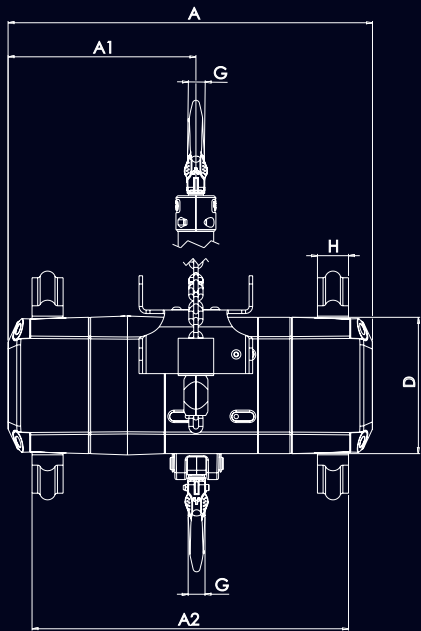

NEXT Truss

NEXT Truss B.V.
Uranusweg 26
8938AJ Leeuwarden

+31 (0)85 079 70 00
www.next-truss.com
sales@next-truss.com

Copyright© 2022- V1 Final by NEXT Truss BV
Without having any written permission from the editor it is not allowed to copy, reproduce or publish any part of this brochure, neither in printed form nor by photos or electronic media. All technical specifications are subject to change without notification. We do not assume liability for any incorrect information in this catalogue.

We have done our utmost to trace the sources and copyright holders of the images. If, nevertheless, footage is shown for which you are (co-)owner and for the use of which you have not given permission, we request you to send an email to: marketing@next-truss.com

