



# AUTO ELECTRICAL & LIGHTING RANGE



**STEEPER.  
DEEPER.  
FURTHER.**



# CONTENTS

Solar Panels	4
Solar Accessories	5-6
Battery Management	7-10
Wind Generator	11
Switches & Sockets	12-17
LED Lights	18-23





# SOLAR - PANELS

## SEMI-FLEXIBLE MONOCRYSTALLINE SOLAR PANELS

Experience the excellence of high-grade monocrystalline technology, offering a lightweight and resilient solution for charging your batteries effortlessly, wherever and whenever you need.



Part No.	Watts	Dimensions	Open Circuit Voltage	Short Circuit Current
DT-SP1.5	1.5W	350 x 125 x 13mm	17.5V	110mA
DTSPF60	60W	680 x 575 x 3mm	21.6V	3.4A
DTSPF80	80W	845 x 690 x 3mm	21.6V	4.53A
DTSPF110	110W	1,070 x 670 x 3mm	21.6V	6.53A
DTSPF160	160W	1,370 x 670 x 3mm	21.9V	9.37A

## FOLDABLE MONOCRYSTALLINE SOLAR BLANKETS

Explore limitless possibilities with our Foldable Solar Blanket range. Designed to be portable, compact, and lightweight. Embrace the convenience of reliable energy wherever you go.



Part No.	Watts	Regulator	Open Dimensions	Open Circuit Voltage	Short Circuit Current
DTSB120	120W	PWM	1,070 x 700 x 5mm	22.3V	7.35A
DTSB200	200W	PWM	1,110 x 1,105 x 5mm	22.5V	11.53A
DTSB250	250W	MPPT	2,500 x 680 x 10mm	22.68V	14.2A



# SOLAR - ACCESSORIES

## 30A MPPT SOLAR REGULATOR & MONITOR

DT-SR30M

- 12/24V systems
- Open circuit of solar panel: <75V
- Low voltage disconnection: 10.8/21.6V
- Low voltage reconnection: 12.6/25.2V
- LCD Monitor
- Fully automatic
- All battery chemistries
- Lithium Profile Option
- MPPT Regulator
- IP30
- Suitable for solar panels up to 360 watts
- 133 x 195 x 55mm



## BATTERY MONITOR DISPLAY

DT-17012

- Monitor time to empty, battery percentage, current draw, current inwards and wattage usage on battery banks up to 590Ah
- Operating voltage: 8-60VDC
- Shunt operating current: 150A
- Built in current: 5-10A
- Outside unit diameter: 66 x 40 x 10mm
- Display window size: 32 x 23mm
- External dimensions of shunt: 23 x 18 x 5mm
- Compatible with Lithium batteries



## 30A SOLAR REGULATOR AND MONITOR

DTSR30


- Suitable for solar panels up to 360 watts
- Open circuit of solar panel: <50V
- Low voltage disconnection: 10.7/21.4V
- Low voltage reconnection: 12.6/25.2V
- Waterproof PWM regulator and battery monitor
- LCD monitor
- Fully automatic
- Low and high voltage disconnect



## 10A SOLAR REGULATOR

DTSR10

- Suitable for solar panels up to 120 watts
- Wet cell rechargeable only
- Waterproof PWM regulator
- Open circuit of solar panel: <50V
- Low voltage disconnection: 10.7/21.4V
- Low voltage reconnection: 12.6/25.2V
- Float voltage: 13.75/28V
- No load current +/- 25mA
- LED indicators
- Fully automatic

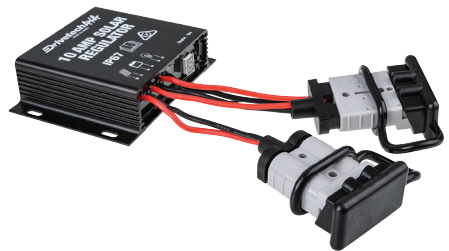

# BATTERY MANAGEMENT

## QUAD CONNECTOR

DT-02010

- 4x 50A Anderson Style Connectors (1x Input + 3 x Output)
- 2x 5V/2.4A USB Ports
- 2x 5V/2.4A USB-C Ports
- 1x DC8-30V Voltage Meter
- Over Voltage/Current/Short Protection
- Reverse Polarity Protection



## 50A ANDERSON TO MC4 PLUG

DT-APMC4

- 8B&S Cable
- MC4 Solar Plugs
- 50A Anderson style plug
- 500mm length



## 50A ANDERSON STYLE PLUG EXTENSION LEAD

DTAPEL

- 2 Heavy duty Anderson style plugs
- 6B&S twin core cable
- Durable polycarbonate casing
- Silver plated copper terminals
- Length: 5m



## 50A ANDERSON STYLE PLUG TO BATTERY CLIP LEAD

DTAPC

- 8B&S Cable
- 50A Anderson style plug to alligator clips lead
- Length: 300mm



## 50A ANDERSON STYLE PLUG TO EYE TERMINAL LEAD

DTAPE

- 50A Anderson style plug
- 8B&S cable
- Length: 300mm



## 50A ANDERSON STYLE PLUG SINGLE TO TWIN LEAD

DTAPY

- 50A Anderson style plugs
- 8B&S cable
- Conductor cross section: 8.37mm<sup>2</sup>



## 50A ANDERSON CONNECTOR

DT-06960 - GREY, DT-06980 - BLACK, DT-06961 - RED

- 50Amp
- 2 pins
- Silver plated copper terminals
- Suits 6 B&S cable



## DC-DC CHARGER MOUNTING BRACKET

DT-02025

- Solid 5mm thick powder coated aluminium pre-drilled bracket
- Suits:
  - DT4x4 DT-02020
  - all Redarc BCDC units
  - Projecta IDC25 & IDC45
  - CTEK D250SE



# BATTERY MANAGEMENT

## DC-DC BATTERY CHARGER 30A WITH SOLAR INPUT

DT-02022

- Easy to read remote mount Bluetooth LCD screen
- 12-24V system input with 12V output
- 0-90° Operating Temperature
- IP67 Rating
- Modular design to easily increase amperage outputs using MST (Modular Sense technology)
- Lithium battery charging profile
- Internal charger temperature monitoring and power output control
- Over charging, short circuit and temperature protection
- Reverse polarity protection
- 50V solar input with MPPT regulated output allowing 300W of Solar
- Unit: 190 x 125 x 40mm, Screen: 75 x 75 x 20mm



## DC-DC WIRING KITS FOR DC-DC BATTERY CHARGER

DT-02022W5 - 5M

DT-02022W10 - 10M

- 6 B&S Cable (6AWG)
- 2x Midi Fuse Holder
- 2x 40A Midi Fuse
- 2x 60A Midi Fuse
- 2x Anderson Plugs
- 4x Anderson Pins
- Negative Distribution Block



## 12V CONTROL BOX

DT-02009

- Laser cut alloy, powder coated black case
- Automatic resettable circuit breakers
- Includes:
  - 5x On/Off switches with sticker kit,
  - 3x Power sockets, 1x dual USB socket,
  - 2x Anderson style plugs,
  - 1x Digital voltage meter
- Compatible with wide range of DC-DC chargers and solar regulators
- Small footprint at 400 x 250 x 80mm





# BATTERY MANAGEMENT

## 12V MINI CONTROL BOX

DT-02011

- ABS plastic
- Easy to read LCD Display
- Suitable battery types Any deep cycle (Lithium, AGM, Calcium, Wet, Gel)
- Screen only monitors USB current usage
- 4x 50A Anderson plug inputs/outputs
- 2x 10A cig socket
- 2x 2.4A USB-A
- 2x 18W QC3.0 USB
- 1x PD 20W USB-C
- 1x PD 100W USB-C
- 170 x 120 x 64mm



## 12/24V POWER DISTRIBUTION PANEL

DT-11220

- 1 x Dual USB Socket (2 x 5V) with Cover
- 2 x DC Power Sockets (DC12V / 20A) with Covers
- 1 x Digital Voltmeter (Rating 5-30V)
- 1 x On/Off Voltmeter Switch
- 1 x 50A Anderson Style input socket
- 1 x Pair of Mounting Brackets
- Panel made from heavy duty, 2mm thick, laser cut black powder coated aluminium
- Dimensions: 210 x 70 x 70mm
- Perfect for all your 4WD, Caravan, Camping and Trailer power needs



## POWER DISTRIBUTION BOX

DT-06013

- Connect to standard Anderson plug
- 2x 10A accessory sockets
- 2x 2.4A USB outlet
- 1x 50A Anderson style plug
- 2x wired blank connectors
- LCD volt/amp meter
- Low voltage warning
- Internal circuit breaker protection



# BATTERY MANAGEMENT

## 12V HEAVY DUTY BATTERY BOX

DT-02012

- LCD screen (monitoring: Battery voltage, current draw from USB's, outside temp and battery state of charge)
- Wireless charging
- Constructed of industrial grade polypropylene with 2.3mm thick walls
- Big enough to take a 120Ah AGM deep cycle battery
- Separate mounting tray
- Protected with Maxi Blade fuses
- Internal dimensions: 340 x 220 x 230mm
- Includes:
  - 3 x 50A Grey Anderson style connectors
  - 1x 50A Red Anderson style connector
  - 2x 12V DC sockets
  - 2x 2.4A USB sockets
  - 2x USBC sockets



---

## 12V HEAVY DUTY BATTERY BOX

DT-02008

- Constructed of industrial grade polypropylene with 2.3mm thick walls
- Big enough to take a 120Ah AGM deep cycle battery
- Internal battery strap mounts
- Separate mounting tray
- Protected with a resettable circuit breaker
- Internal dimensions: 340 x 220 x 230mm
- Includes:
  - 2x recessed 50A Anderson style connectors
  - 2x 12V DC sockets
  - 2x 2.4A USB sockets
  - 1x LED voltmeter



# BATTERY MANAGEMENT

## SINE WAVE INVERTER

- Removable 2.4inch Bluetooth® colour LCD display with touch screen functionality for switching main unit on/off and displays inverter input voltage, amperage, output wattage and also low voltage warning
- Single 240VAC outlet
- Safety switch to turn on/off unit 240VAC output and for instantaneous output cut-off in the event of an accidental short circuit
- Shuts down output at 11V along with warning icon on LCD screen
- Over/under voltage, output short circuit, over temperature protection



Part No.	Watts	Dimensions	Output Overload	Peak Power
DT-02600	600	263 x 233 x 95mm	680W	1200W
DT-021000	1000	310 x 233 x 95mm	1100W	2000W
DT-022000	2000	435 x 233 x 95mm	2200W	4000W





# WIND GENERATOR

## 200W WIND GENERATOR KIT

DT-WG200

- 200W output
- Low start up speed of 2m/s
- Nylon fibre blades
- Die-cast aluminium housing
- Includes 3-phase regulator, 3x 1.5m mounting poles and ropes
- Comes in a handy carry bag

### Wind Turbine

- Rated power: 200W
- Maximum power: 230W
- Nominal voltage: 12V/24V
- Start-up wind speed: 2.0m/s
- Rated wind speed: 10m/s
- Working speed: 2~45m/s
- Safe speed: 45m/s
- Weight: 5.9Kg
- Blade diameter: 1.1m
- Number of blades: 3
- Blade material: Nylon fibre
- Generator: Permanent magnet synchronous generator with 3-phase alternating current
- Controller system: Electromagnetic
- Speed way: Automatic adjustment of wind angle
- Working temperature: -40°C~80°C
- Tower type: Guyed tower
- 7m Wiring harness & wind controller: 1
- 1m Galvanised steel poles: 4

### Wind controller

- Rated battery voltage: 12V
- Maximum wind turbine input power: 300W
- Wind turbine charge shut off voltage: 15V
- Wind turbine charge recovery voltage: 13.5V
- IP protection level: IP67



# SWITCH PANELS

## 4 SWITCH PANEL WITH FUSE PROTECTION

DT-11030

Control up to four devices with pre-wired illuminated rocker switches.

- 12/24V
- 20A @ 12V
- 1 pole
- 2 positions
- On/Off - SPST
- Blue LED illumination
- Mounting hole: 93mm x 105mm
- Fascia hides blade fuse holders
- Includes 40 application decals to customise



## 6 SWITCH PANEL WITH FUSE PROTECTION

DT-11031

Control up to six devices with pre-wired illuminated rocker switches.

- 12/24V
- 20A @ 12V
- 1 pole
- 2 positions
- On/Off - SPST
- Blue LED illumination
- Mounting hole: 93mm x 157mm
- Fascia hides blade fuse holders
- Includes 40 application decals to customise



## ULTRA COMPACT TOUCH SWITCH PANELS WITH BLUETOOTH CONTROL

- Bluetooth App control (iOS and Android)
- Programmable momentary switching function
- Built-in resettable fuse
- Flexible wiring with 1m micro USB Cable
- Pairs up to 4 control boxes with easy switching
- Back light for easy night time operation
- 60 assorted graphics stickers
- Customisable virtual panel and backgrounds in App



Part No.	Dimensions (W x H)	Amperage	Voltage Rating	IP Rating
DT-SWP06	91 x 75mm	10A per switch, max 35A per panel	DC 11-30V	IP67
DT-SWP10	130 x 75mm	10A per switch, max 60A per panel		

# SWITCHES

## ROCKER SWITCHES

- On/Off - SPST
- Blue LED illumination
- 12 or 24 volt
- 36 x 20mm mounting hole
- Contacts Rated 20A @ 12V

### Wiring Code

1. Earth
2. Battery +
3. ACC
4. Earth
5. N/A
6. Dash light



Part No.	Description
DT-11008	Driving Lights
DT-11009	Compressor
DT-11010	Roof Lights
DT-11011	Refrigerator
DT-11012	Beacon
DT-11013	AUX Lights

Part No.	Description
DT-11014	Backup Lights
DT-11020	Fog Lights
DT-11021	Light Bar
DT-11022	Front Diff
DT-11024	Zombie Lights

## JUMP START ROCKER SWITCH

DT-11047

- Off/Mom On - SPST
- Blue LED illumination
- 12 or 24 volt
- 36x20mm mounting hole
- Contacts Rated 20A @ 12V



## WINCH ROCKER SWITCH

DT-11007

- Mom On/Off/Mom On - SPDT
- Blue LED illumination
- 12 or 24 volt
- 36x20mm mounting hole
- Contacts Rated 20A @ 12V



## CHROME ROCKER SWITCH

DT-11209

- On/Off - DPDT
- Rated 30A @ 12V DC and 20A @ 24V DC
- Silver plated copper contacts
- 4 blade terminals
- Switch size: 36 x 29mm
- Mounting hole: 30mm x 22mm



## UHF RJ45 CABLE

DT-11118

- 60cm
- Suits DT4x4 UHF Switches





# SWITCHES

## OE STYLE PUSH BUTTON SWITCHES TOYOTA

- 3A @ 12V
- On/Off - SPST
- Blue LED illumination
- Wiring Code: Black: Earth, Blue: Dash light circuit (optional), Red: 12V input, Green: 12V output



Part No.	Description	Mounting Hole	Model
DT-1107	Light Bar		
DT-1108	Driving Lights	21 x 21mm	<ul style="list-style-type: none"> <li>• Prado 150 series 2019 - current</li> <li>• HiAce 2019 - current</li> <li>• RAV4 2019 - current</li> </ul>
DT-1109	USB Socket		
DT-1110	UHF RJ45 Socket		
DT-11001	Driving Lights		
DT-1106	UHF RJ45 Socket		<ul style="list-style-type: none"> <li>• Prado 120 series 2003-2009</li> <li>• LandCruiser 100 series 1998-2007</li> <li>• LandCruiser 79 series New Model</li> <li>• FJ Cruiser 2010-2013</li> <li>• HiLux 2005-2013 KUN26R, GGN15R, GGN25R series</li> <li>• HiAce 2005-2013</li> </ul>
DT-11018	Beacon	39 x 21mm	
DT-11019	AUX Lights		
DT-11083	Lightbar		
DT-11084	Roof Lights		
DT-11104	USB Socket		

## OE STYLE PUSH BUTTON SWITCHES TOYOTA & MITSUBISHI

- 3A @ 12V
- On/Off - SPST
- Blue LED illumination
- Wiring Code: Black: Earth, Blue: Dash light circuit (optional), Red: 12V input, Green: 12V output



Part No.	Description	Mounting Hole	Model
DT-11002	Driving Lights		
DT-11077	Beacon		
DT-11078	AUX Lights	32.5 x 22mm	<ul style="list-style-type: none"> <li>• Prado 150 series 2010-2018</li> <li>• LandCruiser 200 series 2008 - current</li> <li>• RAV4 2006-2011</li> <li>• HiLux GUN series 09/2015 - current</li> <li>• Triton 2015 - current</li> </ul>
DT-11081	Light Bar		
DT-11082	Roof Lights		
DT-11103	USB Socket		
DT-11105	UHF RJ45 Socket		

# SWITCHES

## OE STYLE PUSH BUTTON SWITCHES MITSUBISHI

- 3A @ 12V
- On/Off - SPST
- Blue LED illumination
- Wiring Code: Black: Earth, Blue: Dash light circuit (optional), Red: 12V input, Green: 12V output



Part No.	Description	Mounting Hole	Model
DT-11092	Light Bar	35 x 18mm	<ul style="list-style-type: none"> <li>• Triton ML series 2009-2015</li> <li>• Triton MN series 2009-2015</li> <li>• Challenger series 2009-2015</li> <li>• Pajero 2009-2015</li> </ul>
DT-11093	Driving Lights		
DT-11094	AUX Lights		
DT-11095	Roof Lights		

## OE STYLE PUSH BUTTON SWITCHES NISSAN

- 3A @ 12V
- On/Off - SPST
- Blue LED illumination
- Wiring Code: Black: Earth, Blue: Dash light circuit (optional), Red: 12V input, Green: 12V output



Part No.	Description	Mounting Hole	Model
DT-11100	Driving Lights	30 x 23mm	<ul style="list-style-type: none"> <li>• Pathfinder R52 series 2012 - current</li> <li>• Navara NP300 series 2015 - current</li> <li>• X-Trail T32 series 2014 - current</li> </ul>
DT-11101	AUX Lights		
DT-11102	Roof Lights		
DT-11099	Light Bar	35 x 20mm	<ul style="list-style-type: none"> <li>• Pathfinder R51 series 2005-2012</li> <li>• Navara D40 series 2008-2012</li> <li>• Patrol GU4-7 series 2000-2012</li> <li>• Patrol Y61 series 2013 - current</li> <li>• Patrol Y62 series 2013 - current</li> <li>• X-Trail T31 series 2007-2013</li> </ul>
DT-11003	Driving Lights		
DT-11096	Light Bar		
DT-11097	AUX Lights		
DT-11098	Roof Lights		

## OE STYLE PUSH BUTTON SWITCHES VOLKSWAGEN

- 3A @ 12V
- On/Off - SPST
- Blue LED illumination
- Wiring Code: Black: Earth, Blue: Dash light circuit (optional), Red: 12V input, Green: 12V output



Part No.	Description	Size	Model
DT-11005	Driving Lights	30 x 25mm	<ul style="list-style-type: none"> <li>• Amarok 2011 - current</li> </ul>
DT-11091	Light Bar		

# SWITCHES & SOCKETS

## OE STYLE PUSH BUTTON SWITCHES HOLDEN AND ISUZU

- 3A @ 12V
- On/Off - SPST
- Blue LED illumination
- Wiring Code:  
Black: Earth,  
Blue: Dash light circuit (optional),  
Red: 12V input  
Green: 12V output



Part No.	Description	Mounting Hole	Model
DT-11088	Light Bar		
DT-11089	AUX Lights	34 x 22mm	<ul style="list-style-type: none"> <li>• Isuzu D Max 2013-2016</li> <li>• Holden Colorado 2013-2016</li> </ul>
DT-11090	Roof Lights		
DT-11048	Driving Lights		
DT-11004	Driving Lights	38.6 x 22.5mm	<ul style="list-style-type: none"> <li>• Isuzu D Max 2009-2012</li> <li>• Holden Colorado 2008-2012</li> <li>• Holden Rodeo 2003-2008</li> </ul>
DT-11085	Light Bar		
DT-11086	AUX Lights		

## 3.0 QUICK CHARGE USB AND TYPE-C PORT POWER SOCKET

DT-17104

- Input voltage: DC12V and DC24V
- QC3.0 Quick Charge USB Port
- 2x 55W Type-C Ports
- Blue LED backlight illumination
- Cover to protect against dust and grime
- ABS plastic housing
- 2x Fitting terminals
- 1x plastic fitting ring
- 2x screws



## 3.0 QUICK CHARGE USB, TYPE-C PORT AND VOLTAGE DISPLAY POWER SOCKET

DT-17103

- Input Voltage: DC12V and DC24V
- QC3.0 Quick Charge USB Port
- 55W Type-C Port
- Blue LED Digital Voltage Display
- Cover to protect against dust and grime
- ABS Plastic housing
- 2x fitting terminals
- 1x plastic fitting ring
- 2x screws





# SWITCHES & SOCKETS

## DUAL USB SOCKET 2.4A PER USB

DT-17102

- 12/24V
- Dual USB Dash or panel mount
- 29mm socket mounting hole
- 2.4A per USB



## 20A POWER SOCKET

DT-06101

- 12/24V
- 20A
- Dash or panel mount
- Blue LED back light
- 29mm socket mounting hole



## DUAL USB SOCKET PANEL MOUNT WITH VOLTMETER

DT-11025

- 12/24V
- 2.1 amp per socket
- 4.2A combined



## 12/24V ROUND VOLTMETER

DT-06104

- Blue LED display
- 5-30V range
- 29mm diameter
- Socket mount - dash or panel
- Can be used to monitor your trailer breakaway battery



# LIGHTING - LED DRIVING LIGHTS

## LED DRIVING LIGHT

170mm DT-DR170

- 170mm Diameter
- 1 LUX @ 690m (per pair), 8,600 Raw Lumens, 6,509 Effective Lumens
- 10 to 32V compatible
- 6.8A @ 13.2V
- 96W
- High-powered CREE XTE LEDs
- Durable black powder-coated finish
- IP67 waterproof and dustproof rating
- Weatherproof Deutsch connectors
- 185 x 189 x 76.5mm
- 3 Year warranty



---

## LED DRIVING LIGHT

220mm DT-DR220

- 220mm Diameter
- 1 LUX @ 920m (per pair), 13,500 Raw Lumens, 10,222 Effective Lumens
- 10 to 32V compatible
- 12.3A @ 13.2V
- 162W
- High-powered CREE XTE LEDs
- Durable black powder-coated finish
- IP67 waterproof and dustproof rating
- Weatherproof Deutsch connectors
- 240.5 x 235 x 87.5mm
- 3 Year warranty



# LIGHTING - LED DRIVING LIGHTS

## LED DRIVING LIGHT BAR

8 INCH 6LED DT-LB106

- 9-36V range, compatible with 12V & 24V systems
- 1 LUX at 260m, 2,856 Raw Lumens, 1,512 Effective Lumens
- 30W (6x 5W OSRAM LEDs)
- IP68/IP69K rated: fully waterproof and dust tight
- Polycarbonate lens
- Combination beam optics
- Integrated heatsink
- 202 x 46 x 48.7mm (LxHxD)
- 2 Year warranty



---

## LED DRIVING LIGHT BAR

12 INCH 10LED DT-LB110

- 9-36V range, compatible with 12V & 24V systems
- 1 LUX at 383m, 4,760 Raw Lumens, 2,682 Effective Lumens
- 50W (10x 5W OSRAM LEDs)
- IP68/IP69K rated: fully waterproof and dust tight,
- Polycarbonate lens
- Combination beam optics
- Integrated heatsink
- 303.6 x 46 x 48.7mm (LxHxD)
- 2 Year warranty




---

## LED DRIVING LIGHT BAR

22 INCH 20LED DT-LB120

- 9-36V range, compatible with 12V & 24V systems
- 1 LUX at 528m 9,520 Raw Lumens, 5,015 Effective Lumens
- 100W (20x 5W OSRAM LEDs)
- IP68/IP69K rated: fully waterproof and dust tight
- Polycarbonate lens
- Combination beam optics
- Integrated heatsink
- 557.6 x 46 x 48.7mm (LxHxD)
- 2 Year warranty



# LIGHTING - LED DRIVING LIGHTS

## LED DRIVING DUAL LIGHT BAR

12 INCH 20LED DT-LB120D

- 9-36V range, compatible with 12V & 24V systems
- 1 LUX at 400m, 9,520 Raw Lumens, 3,931 Effective Lumens, 100W (20x 5W OSRAM LEDs)
- IP68/IP69K rated: fully waterproof and dust tight
- Polycarbonate lens
- Combination beam optics
- Integrated heatsink
- 304 x 72.3 x 49.3mm (LxHxD)
- 2 Year warranty




---

## LED DRIVING DUAL LIGHT BAR

22 INCH 40LED DT-LB140D

- 9-36V range, compatible with 12V & 24V systems
- 1 LUX at 518m, 19,040 Raw Lumens, 7,014 Effective Lumens, 200W (40x 5W OSRAM LEDs)
- IP68/IP69K rated: fully waterproof and dust tight
- Polycarbonate lens
- Combination beam optics
- Integrated heatsink
- 558 x 72.3 x 49.3mm (LxHxD)
- 2 Year warranty

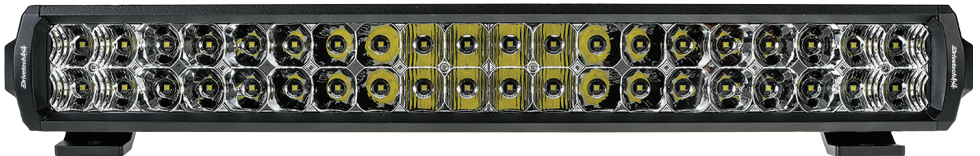

# LIGHTING - LED DRIVING LIGHTS

## 7 INCH LED HEADLIGHT WITH PARK LIGHT AND INDICATOR DTHL7LED

- ADR road approved LED high/low beam headlight with incorporated parking light and indicator
- Crisp white 6000K colour temperature
- Tough aluminium housing and polycarbonate lens
- IP67 waterproof and dustproof rating
- Compatible with 12V and 24V systems
- Negative switching and Canbus compatible
- 177 x 116mm to fit existing 7 inch housing
- 3 Year warranty



## FLUSH MOUNT PARK/INDICATOR/ FOG LIGHT

DT-LEDFMFPI

- ECE R19, R7, R6, R10 (EMC) Standards
- 10-30V
- 320 Lumen Fog Light, 150 Lumen Park Light, 140 Lumen Indicator
- 13.7W Fog Light, 0.7W Park Light, 11W Indicator
- 4P DEUTSCH socket connector
- 120 x 90 x 80mm
- Aluminium housing
- Anti-UV Polycarbonate lens
- Stainless Steel bracket
- IP67, IP69K
- 3 Year warranty



## FLUSH MOUNT INTEGRATED REVERSE LIGHT/FLOOD WORK LIGHT

DT-LEDFMREVFLL

- ECE R23 (Reverse Light), R10 (EMC) Standards
- 10-30V
- 13W Reverse Lamp, 18W Work Lamp
- 900 - 1,000LM Reverse Lamp, 1300-1500LM Work Lamp
- 3P DEUTSCH socket connector
- 120 x 90 x 80mm
- Aluminium housing
- Anti-UV Polycarbonate lens
- Stainless Steel bracket
- IP67, IP69K
- 3 Year warranty






# LIGHTING - LED WORK & CAMP LIGHTS

## 12/24V LOW PROFILE FLUSH MOUNT LED WORK LIGHT

DTWLLP

- 1,600 Raw Lumens, 1,250 Effective Lumens
- 4x 5W LEDs (20W)
- 10-30V input range, compatible with 12 and 24V systems
- Minimal current draw 1.5A @ 12V
- IP68/IP69K rated: fully waterproof and dust tight
- Deutsch DT connector
- 151 x 41 x 65mm (WxHxD)

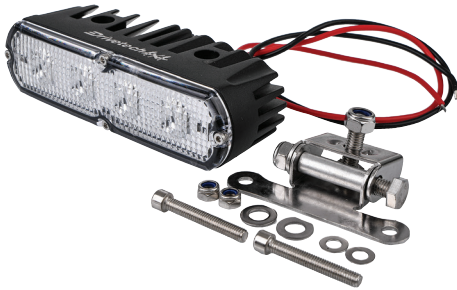

## LED ROCK LIGHT

WHITE DTWL30VL

- Single light with 3x 3W LEDs
- 1,000 Lumens output
- Surface mount
- Aluminium body with polycarbonate lens
- IP69K rated to withstand high-pressure washing
- 12 month warranty
- 75 x 43 x 15mm
- 35° rubber mounting base included



## RECHARGEABLE LED TORCH WITH ADJUSTABLE BEAM

DT-T2000L

- 2,000 Lumens output with up to 500m beam distance
- CREE XPH50 White LED
- 4 hour run time on high output setting
- Charging time: approx. 4 hours
- 60mm (diameter) x 245mm (length)
- 3 output settings: high, low and flashing
- Aluminium body with black finish
- Glass lens
- USB charging port with cover, cable included
- LED battery level indicator



## RECHARGEABLE COB HEADLAMP

DT-HLCOB

- Dual mode (XPE spot/ COB Flood)
- Variable Brightness: XPE Max 70 Lumens (COB Max 350 Lumens)
- On/Off switch or motion sensor
- Run Times XPE high - 4 hours / COB high 3.5 Hours
- Charging time: approx 2.5 hours
- Includes 45cm USB-C charging cable
- 1 Year warranty





# LIGHTING - LED CAMPING LIGHT

## TELESCOPIC CAMPING LIGHT KIT

DT-5SMD

- Dual colour output with white and amber LEDs
- IP67 waterproof rating
- Dimmer switch to select brightness of 25%, 50% or 100%
- 5x SMD plates - white and amber LEDs
- Illumination range of up to 50m
- 3.8m telescopic, stainless steel pole, illuminates an area up to 50M in diameter.
- 10m cable, includes on/off switch and dimmer control
- Connects to 12V power supply with cigarette plug adaptor or battery clamps

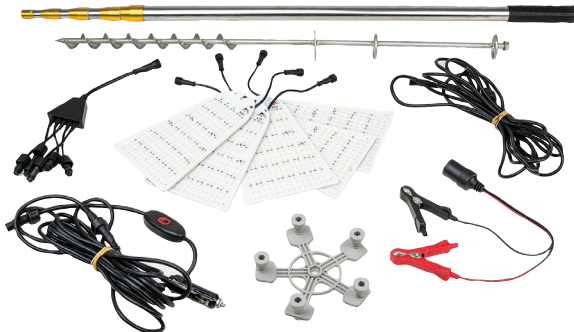



Find your local stockist at [drivetech4x4.com.au](http://drivetech4x4.com.au)