


ALL TERRAIN II


4WD PERFORMANCE

BLACK BEAR is committed to be the next leading brand in the extreme off-road world.


Black Bear AT II tyres powerful grip in wet and extreme weather conditions allows the driver to travel with confidence. This outstanding design is engineered to minimise noise and the deeper tread to provide a longer lasting wear.




Strong and durable, simple and generous design of all-weather pattern: reinforced matrix material employed, thickened tread pattern and sidewall pattern. It is the best choice of off-road, rally and SUV.

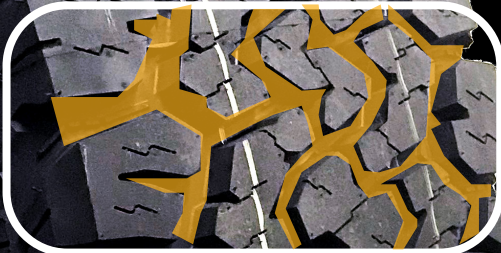


Entirely new knife groove design: it adjusts hardness of tyre tread properly and reduces tyre noise. So it makes this tyre not only suit for mud terrain, snowy and icy roads but also suit for highway.

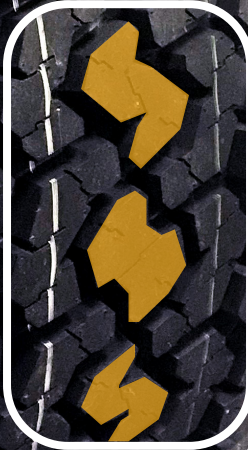

Design of "S" and "I" blocks in the center of tread: it improves the tyre grip greatly and at the same time, it makes this tyre look concise and strong. Favorite to extreme off-road enthusiasts.

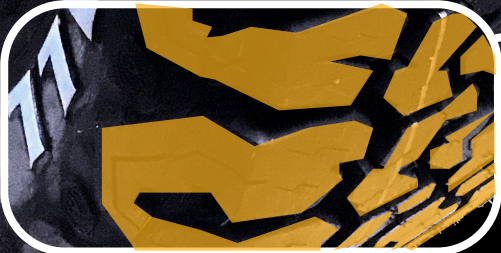

30% intensification of sidewall pattern: it can make sidewall to resist the powerful impacts when crossing barriers, provide more auxiliary grip when rolling in muddy roads, so as to help tyre climbing out of puddles.

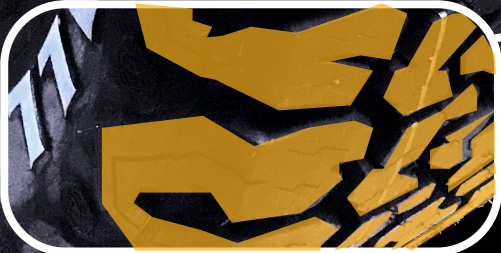

This 3 Ply sidewall provides tread with strong rear resistance, and at the same time gives the tyre good grip in wet and snowy weather. It insures to be worthy of the name, "All Terrain"!

ALL TERRAIN II

4WD PERFORMANCE

Size	Load & Speed Rating	Ply Rating	Overall Diameter	Section Width	Rim Diameter	Approved Rim Width Range (IN.)		
● RWL LT235/75R15	110/107	Q	8	733	235	15	6-6.5-8	
● RWL LT31x10.5R15	109	S	6			15	NEW	
● RWL LT33x12.5R15	108	Q	6			15	NEW	
● RWL LT33x12.5R15	117	Q	18			15	NEW	
● RWL LT245/70R16	118/115	S	10	750	248	16	6.5-7-7.5	
● RWL LT245/75R16	120/116	S	10	774	248	16	6.5-7-8.5	
● RWL LT255/70R16	120/117	S	10			16	6.5-7-7.5	NEW
●● RWL LT265/70R16	121/118	S	10	804	267	16	7-7.5-8	
● RWL LT265/75R16	123/120	R	10	804	267	16	7-7.5-8	
● RWL LT285/75R16	126/123	R	10	834	286	16	7.5-8-9	
● RED LT315/75R16	127/124	R	10	884	313	16	8-8.5-11	
●● RWL LT225/65R17	107/103	S	8	724	228	17	6-6.5-8	
● LT235/65R17	109/105	R	8		228	17	6-6.5-8	
● RWL LT245/70R17	119/116	R	10	776	248	17	6.5-7-8	
● RWL LT265/65R17	120/117	S	10	776	272	17	7.5-8-9.5	
● RWL LT265/70R17	121/118	S	10	804	272	17	7-8-8.5	
● RWL LT275/65R17	121/118	S	10	790	279	17	7.5-8-9.5	
● RWL LT275/70R17	121/118	S	10			17	7.5-8.5-9	
● RED LT285/70R17	121/118	S	10	832	292	17	7.5-8.5-9	
● LT33X12.50R17	120	R	10	826	318	17	8.5-10-11	
● LT35X12.50R17 (LT315/70R17)	121	R	10	877	318	17	8.5-10-11	
● LT37X12.50R17	131	Q	12			17	8.5-10-11	
● LT37X12.50R17	137	M	14	928	318	17	8.5-10-11	
● RWL LT255/60R18	118/115	R	10			18	7-8-8.5	
● RWL LT265/60R18	119/116	S	10	775	272	18	7.5-8-9.5	
● RWL LT265/65R18	122/119	Q	10			18	7.5-8-9.5	NEW
● RWL LT265/70R18	124/121	S	10	829	272	18	7-8-9	
● RWL LT275/70R18	125/122	R	10	843	279	18	7-8-9	
● LT285/60R18	120/117	H	8	799	292	18	7.5-8.5-9.5	
● RWL LT285/65R18	125/122	S	10	827	292	18	8-10	
● 33X12.50R18LT	118	R	10	826	318	18	8.5-10-11	
● 35X12.50R18LT	123	R	10	877	318	18	8.5-10-11	
● RWL 255/55R19	116/113	R	10			19	7-7.5-8.5	NEW
● RWL LT265/50R20	116/112	S	10	774	277	20	7.5-8.5-9.5	
● RWL LT265/60R20	121/118	S	10	826	272	20	7.5-8-9.5	NEW
● LT275/55R20	120/117	S	10	284	810	20	7.5-8.5-9.5	
● LT275/60R20	123/120	S	10	838	279	20	7.5-8-9.5	
● LT285/50R20	114/110	H	8	800	297	20	8-9-10	
● LT285/55R20	122/119	S	10	822	297	20	8-9-10	
● LT305/55R20	121/118	S	10	844	316	20	8.5-9.5-10	
● 33X12.50R20LT	114	R	10	826	318	20	8.5-10-11	
● 35X12.50R20LT	121	R	10	877	318	20	8.5-10-11	
● 37X12.50R20LT	128	Q	12			20	8.5-10-11	NEW
● LT275/42R21	113/110	S	10			21	COMING SOON	

AVAILABLE IN ● RED LETTERING ● RAISED WHITE LETTERING (ONLY WHILE STOCK LASTS)



PERFORMANCE RATING

DEALER LOCATOR