
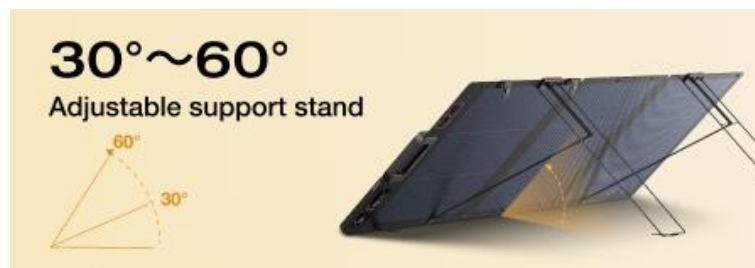


EcoFlow Portable Solar Panels

EcoFlow New Ultra-Lightweight Solar Panels

Specifications	110W Lightweight Solar Panel	160W Lightweight Solar Panel	220W Lightweight Solar Panel	400W Lightweight Solar Panel
Rated Power	110W (±5W)	160W (±5W)	220W (±5W)	400W (±5W)
Efficiency	25%	25%	25%	25%
Weight	3.3kg	3.8kg	5.1kg	10.2kg
Water and dust resistance	IP68	IP68	IP68	IP68

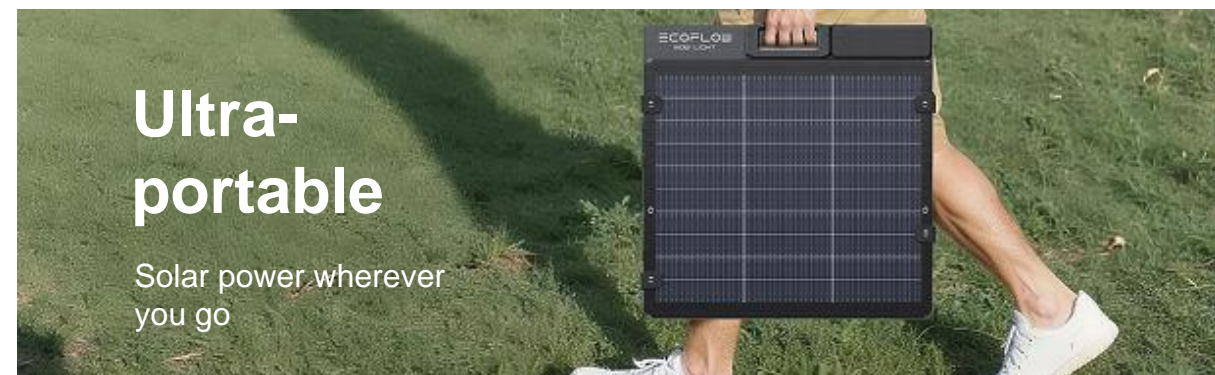

Scan to learn more



Who we are

EcoFlow is a leading provider of eco-friendly energy solutions, helping power homes, businesses and life on the move. Since 2017, we have focused on flexible, innovative, reliable and easy-to-use power solutions for home, outdoor and mobile use. With headquarters in the USA, Germany and Japan, EcoFlow supports more than 5 million users across 140+ countries and regions.



* EcoFlow ranked No. 1 worldwide for portable power station sales in 2025. Source: Frost & Sullivan, 2025 Global Portable Power Station Market Research Report; research completed May 2026.

** Portable power stations are compact energy storage devices with built-in lithium-ion batteries, typically ranging from 100 Wh to 3,000 Wh.

EcoFlow Technology Ltd.

Discover EcoFlow

Website: au.ecoflow.com
 Instagram: [@EcoFlow.Australia](https://www.instagram.com/EcoFlow.Australia)
 Facebook: [@EcoFlow](https://www.facebook.com/EcoFlow)
 Facebook community: [EcoFlow Australia Official Group](https://www.facebook.com/EcoFlow.Australia.Official.Group)



Instagram



Facebook

Become a Retail Partner

Website: techlyte.com.au/contact-us
 Email: sales@techlyte.com.au



Become a Retail Partner

ECOFLOW



POWER A NEW WORLD




* EcoFlow ranked No. 1 worldwide for portable power station sales in 2025. Source: Frost & Sullivan, 2025 Global Portable Power Station Market Research Report; research completed May 2026.
 ** Portable power stations are compact energy storage devices with built-in lithium-ion batteries, typically ranging from 100 Wh to 3,000 Wh.

Portable Fridge Freezer EcoFlow GLACIER Classic

Model	35 L / 45 L / 55 L
Weight	20.5 kg / 23.3 kg / 25.2 kg
Dimensions	706 x 400 x 405 mm / 706 x 400 x 480 mm / 706 x 466 x 480 mm
Temperature range	-20°C to 20°C
Battery runtime	Up to 43 hrs with 298 Wh plug-in battery
Power consumption	0.57 Ah/hr / 0.67 Ah/hr / 0.67 Ah/hr
Rated power	55 W
Refrigerant	R600a
Noise level	<38.5 dB



Scan to learn more

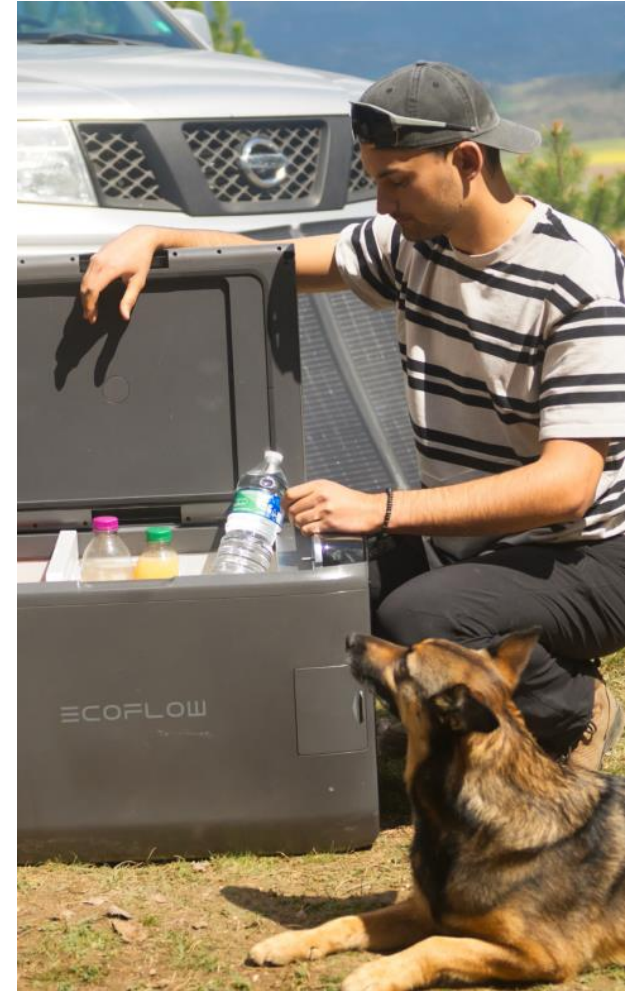

Portable Air Conditioner EcoFlow WAVE 3

Weight	Approx. 16.1 kg
Dimensions	519 x 297 x 336 mm
Cooling capacity	6,100 BTU (1,800 W)
Heating capacity	6,800 BTU (2,000 W)
Cooling/heating speed	8°C cooling / 9°C heating in 15 mins
Runtime with add-on battery*	2-8 hrs
Rated cooling power	AC 690 W / DC 640 W
Rated heating input	AC 645 W / DC 606 W
Refrigerant / charge	R290 / 140 g
Airflow	330 m³/h
Noise level	44-58 dB



Scan to learn more



Portable Power Stations

Scan to learn more



Specifications	TRAIL Plus 300	RIVER 3 Plus	RIVER 3 Max	RIVER 3 Max Plus
Capacity	288 Wh	286 Wh	572 Wh	858 Wh
Weight	2.25 kg	4.7 kg	8.4 kg	10.8 kg
Output ports	6	7	8	8
AC output	Not supported	600 W total (surge 1,200 W)	600 W total (surge 1,200 W)	600 W total (surge 1,200 W)
DC output	300 W total	USB-C 100 W max. USB-A 12 W per port	USB-C 100 W max. USB-A 12 W per port	USB-C 100 W max. USB-A 12 W per port
UPS	--	<10 ms	<10 ms	<10 ms
AC charging Recharge time	140W 2.7 hrs	360W 1 hr	650W 1.3 hr	650W 1.8 hr
Solar charging Recharge time	110W 3.65 hrs	220W 1.5 hrs	220W 3.2 hrs	220W 4.8 hrs
Noise level	-	<30 dB	<30 dB	<30 dB



Portable Dual Battery System for 4WD Overlanding

Scan to Learn More



Traditional 12 V systems

- ❑ 1 kWh in around 10 hours
- ❑ One charging function only
- ❑ Limited to a cigarette-lighter socket
- ❑ Most do not support Apple CarPlay or Android Auto, so battery checks must be done manually
- ❑ Takes up valuable space
- ❑ Complex wiring and installation



EcoFlow Dual Battery System

- ✓ Charge a portable power station up to 10x faster; add 1 kWh in as little as 1 hour while driving
- ✓ 3-in-1 vehicle battery care: charger, maintainer and jump starter
- ✓ Supports Apple CarPlay and Android Auto for real-time battery monitoring
- ✓ Flexible solar input via the alternator, rooftop solar, or both
- ✓ DIY-friendly installation

Portable Beyond Your Vehicle. Power Wherever You Go.



Specifications	DELTA 3 Classic	DELTA 3 Plus	DELTA 3 Max Plus	DELTA 3 Ultra Plus	DELTA Pro 3
Capacity	1,024 Wh	1,024 Wh	2,048 Wh	3,072 Wh	4,096 Wh
Expandability	Not supported	Up to 5 kWh	Up to 10 kWh	Up to 11 kWh	Up to 12 kWh
Weight	12.1 kg	12.5 kg	22.1 kg	33.7 kg	51.5 kg
Output ports	5	11	10	10	12
AC output	1800W (surge 3,600 W)	1800W (surge 3,600 W)	3000W (surge 6,000 W)	3600W (surge 7,200 W)	4000W (surge 8,000 W)
UPS	<10 ms	<10 ms	<10 ms	<10 ms	<10 ms
AC charging Recharge time	1400W 1 hr	1500W 56 mins	2300W 1.1 hrs	2300W 1.8 hrs	2300W 3 hrs
Solar charging Recharge time	500W 2.5 hrs	1000W 1.2 hrs	1000W 2.2 hrs	1600W 2.3 hrs	2600W 1.58 hrs
Noise level	<30 dB	<30 dB	<25 dB	<25 dB	<30 dB

Specifications	Alternator Charger Plus 1000	Alternator Charger 800W	Alternator Charger 500W
Charging input Charging speed	1000W Add 1 kWh in 1 hr	800W Add 1 kWh in 1.3 hrs	500W Add 1 kWh in 2.1 hrs
Solar input	Yes	Not supported	Not supported
CarPlay/Android Auto	Yes	Not supported	Not supported
EcoFlow app	Yes	Yes	Yes
Dimensions	276 x 187 x 38 mm	242 x 194 x 35 mm	242 x 194 x 35 mm
Recommended EcoFlow power station	DELTA Pro 3 (4kWh) DELTA 3 Ultra Plus (3kWh) DELTA 3 Max Plus (2kWh)	DELTA 3 Ultra Plus (3kWh) DELTA 3 Max Plus (2kWh) DELTA 3 Plus (1 kWh)	RIVER 3 RIVER 3 Plus RIVER 3 Max RIVER 3 Max Plus