JIADE® 佳德

JDE-120

全自动卧式装盒机

Automatic Horizontal Cartoning Machine

概 述:


该设备是我公司结合国内外先进技术开发研制的新型机型，集光、电、气、机一体化的高科技产品。从而使设备性能和工作效率得到了大幅度提高，实现快速装盒要求，且在快速运行时仍保持平稳、可靠状态。

该机适用于铝塑泡罩板、瓶子、软管、软双铝、袋状等物品的自动装盒，并可与其配套形成包装生产线。自动加料机构调节方便、可在操作屏上任意设定需装盒的版数。在线泡罩版检测、说明书折叠（1至4折叠）与传送、说明书检测、纸盒吸取成形与传送、物料入盒、压印批号、纸盒两端纸舌封装（也可适用热熔胶）、缺料剔除及成品输出等全过程均属自动完成。

Applications:

This equipment is new model developping base on integrated domestic and foreign vanguard technology. It is high technology product incorporates pneumatic-photo-electro-mechanic which improve by a large on performance of equipment and working efficiency, realize encasing fast, keep running steady and reliable when fast running.

This machine is suitable for inserting blister, bottles, tube, soft ALU/ALU strips, sachet and other product into carton, also can link to matching other machine to form production line. adjust automatic feeding structure conveniently, setup quantity of blisters on touch screen randomly. On line product feeding and detecting, leaflet fold(1-4folds) and feeding, leaflet detecting, canton opening and forming, products and leaflet pushing into carton, printing batch number, sealing carton with tuck-in or hot melt glue device. Automatically reject lacking of leaflet or prodcut and finished product out.

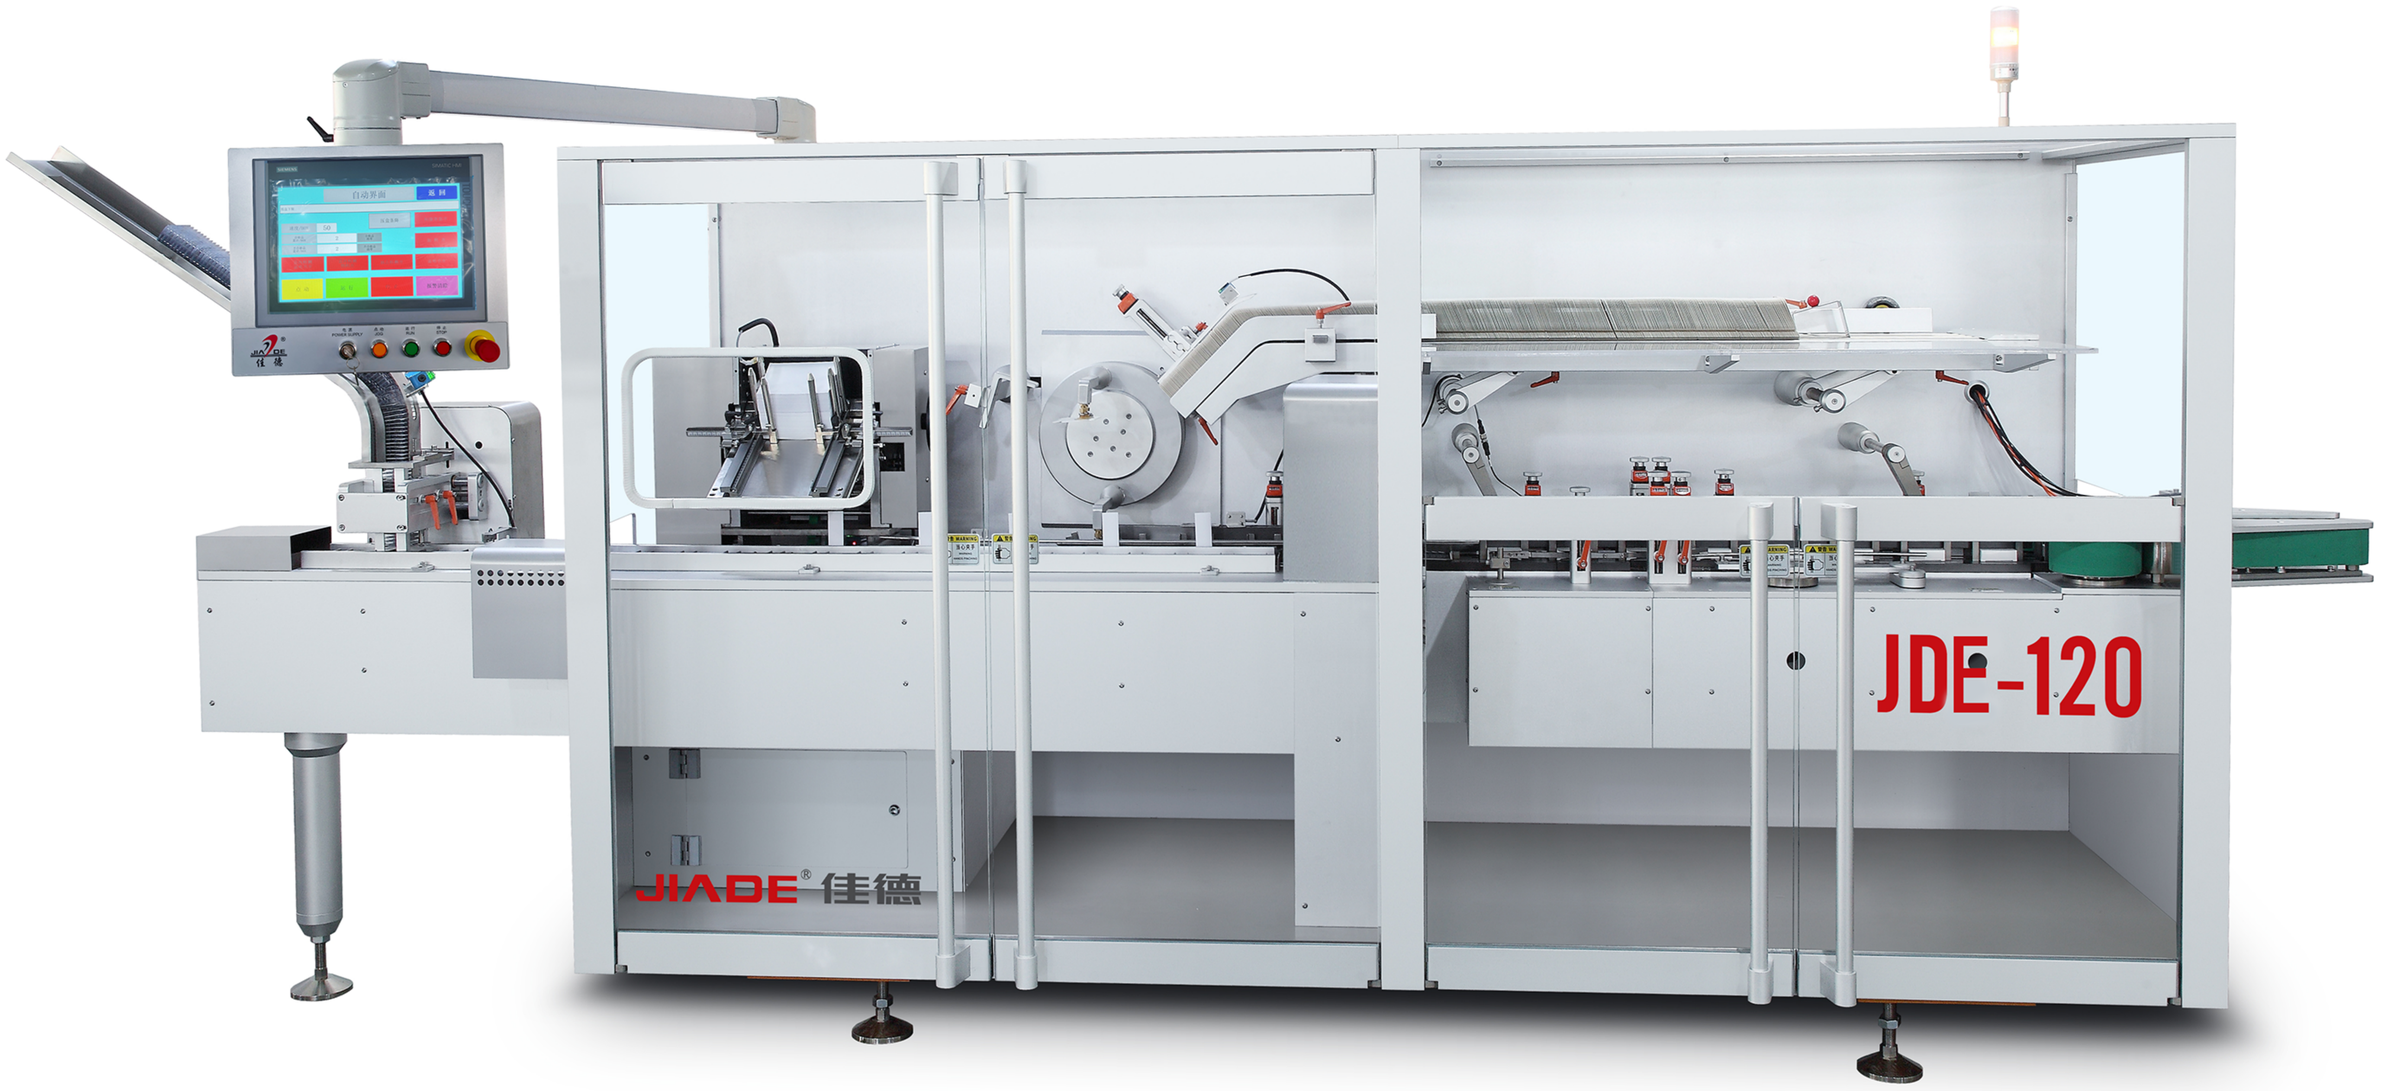

浙江佳德包装机械有限公司
ZHEJIANG JIADE PACKING MACHINERY CO.,LTD.

地 址: 浙江省温州平阳县万全工业区万盛路6号
Add: No.6, Wansheng Road, Wanquan Industrial Zone, Pingyang, Wenzhou, Zhejiang, China

电 话: 0577-63081885 63081886 63081887
Export Department: 0086-577-63082886
Http://www.jiademachine.com E-mail:sales@jiademachine.com

JIADE® 佳德

可选配置：

1. 已折页说明书投放装置
2. 小册子投放装置
3. 条形码识别系统
4. 理瓶装置
5. 小袋供料机
6. 涂胶系统

Options:

1. Folded leaflet inserter
2. Booklet inserter
3. Code reader
4. Vial turntable
5. Sachet feeder
6. Glue application

适用范围：

铝塑泡罩板、软膏、托盘、软双铝、瓶状物、袋状物等类似物品。

Applications:

It's suitable for ALU-PVC blister, tube, tray, soft ALU/ALU strips, bottle, sachet and other similar product.

特 点：


- PLC自动控制系统、变频调速，电器元件均采用国际知名品牌。
- 采用人机界面操作系统。
- 机械过载自动停机。
- 自动剔除缺包装物和说明书的纸盒。
- 故障显示、报警和成品计数。
- 性能稳定、操作简便易懂。

Features:

- International famous brand of electrical component such as PLC touch screen, frequency inverters, etc.
- Adopt human-machine operation system.
- Automatically stop when machine is overload.
- Automatically reject lacking of package product and leaflet.
- Automatically display trouble, Alarm and count finished products.
- Stable performance,operation is easy.





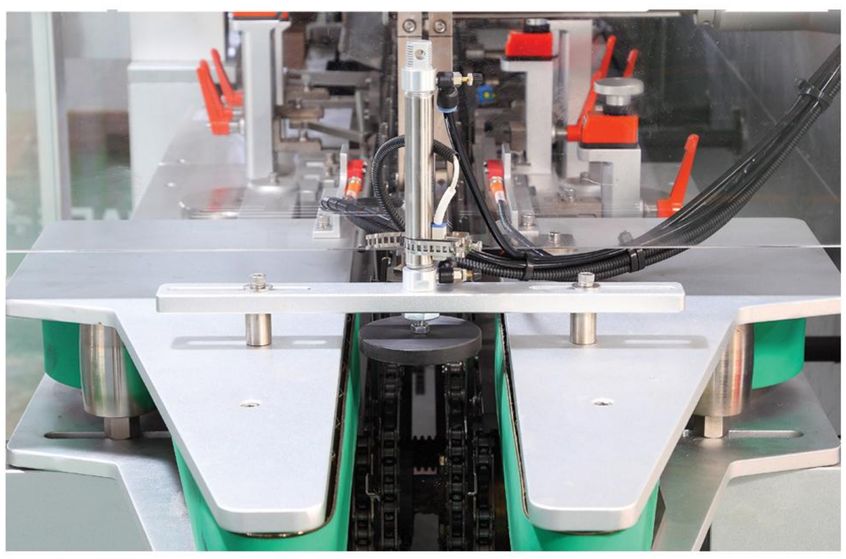

主要技术参数
Main technical parameters

JDE-120(卧式 Horizontal)

装盒速度 Encasing speed		30-120盒/分 (Cartons/min)
纸 盒 Carton	质量要求 Quality requirement	250-350g/m²【视纸盒大小而定】Base on carton size
	尺寸范围 Dimension range (L × W × H)	(70-180)mm × (35-100)mm × (14-50)mm
说 明 书 Leaflet	质量要求 Quality requirement	60-70g/m²
	未折叠尺寸范围 Unfolded leaflet specification	(80-250)mm × (90-180)mm
	折叠范围 Fold range	【1-4】折（Fold）
压缩空气 Compressed air	工作压力 Working pressure	≥0.6Mpa
	耗 气 量 Air consumption	120-160L/min
电 源 Power supply		220V 50Hz
功 率 Motor power		1.5kw
外形尺寸 Machine dimension (L × W × H)		4355mm × 1550mm × 1870mm
整机净重 Machine weight		约3000kg

注意：数据如有更改，恕不另行通知（Notes:If any change of data,we will not notify further.)