


OUR KEY PRODUCT PET Strap

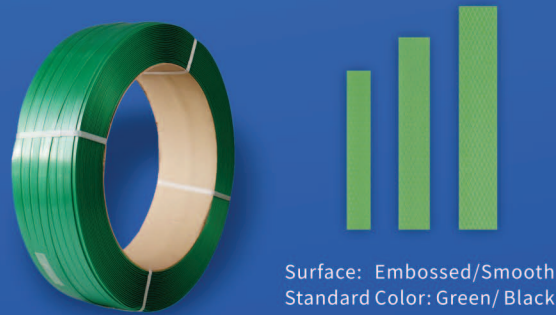

Surface: Embossed/Smooth
Standard Color: Green/ Black

Nominal Thickness (mm)	Nominal Width							
	mm	9.5	11	12.7	16	19	25.4 (25)	31.75 (32)
inch	3/8"	7/16"	1/2"	5/8"	3/4"	1"	1 1/4"	
0.5	•	•	•	•	•			
0.6	•	•	•	•	•		•	•
0.7				•	•		•	•
0.8				•	•		•	•
0.9				•	•		•	•
1.0				•	•		•	•
1.1				•	•		•	•
1.3				•	•		•	•

* Customized specification available according to customer requirements

Polyester straps belong to the modern kinds of materials uniting high strength of steel straps and safe structure and elasticity of plastic straps in their features.

These straps are available in 9.5-32mm widths in high and medium-strength grades.

Other Products



strapping tool

strapping dispenser


OUR KEY PRODUCT Stretch Film



Stretch film or stretch wrap is a highly stretchable plastic film that is used in packaging and shipping to wrap around items to keep them in place. The elastic recovery of stretch wrap keeps the items tightly bound.

Type	Hand Use	Machine Use	Jumbo Roll	Mini Roll	Color Film
Thickness	10-30micron (40-120 Gauge)	15-30micron (60-120 Gauge)	15-30micron (40-120 Gauge)	15-30micron (40-120 Gauge)	15-30micron (40-120 Gauge)
Width Height	20cm-60cm (8"-25") usually 30/40/45/50cm	usually 50cm (20")	10cm-200cm (4"-80")	5cm-20cm (2"-8")	10cm-200cm (4"-80")
Roll Weight	0.7-8kg	10-25kg	25-50kg	0.1-1kg	0.1-50kg
Core	ID 1" 1.5" 2" 3" 0.15-0.7kg	ID 3"/76mm 0.5-1kg usually	ID 3"/76mm 0.6-2kg usually	ID 1" 1.5" 2" 3" 0.05-0.15kg	all available
Packing	Caton packing Customized	Pallitized or 1 roll/ctn	Pallitized	Caton packing Customized	Caton packing Customized


OUR KEY PRODUCT PP Strap

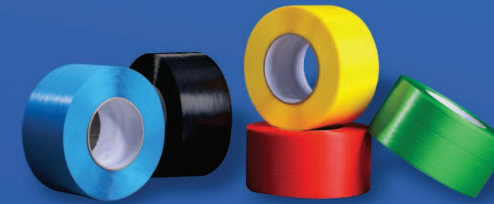


PP strapping standard in widths 5-15 millimeters in black and clear white. On request, we will be happy to produce it for you in other colors as well. PP strapping material is particularly suitable for strapping packages, cartons or other containers, as well as lighter pallets.

Product Code	Width	Thickness	Length	Breaking	Elongation	Coil ID	Coil Height
	mm	mm	M	KG	%	mm	mm
05035-6000	4.3-5	0.33-0.43	6000	45	< 20%	200	188
0504-6000	4.3-5	0.37-0.45	6000	50	< 20%	200	188
05045-6000	4.4-5	0.43-0.53	6000	60	< 20%	200	188
05047-7000	4.4-5	0.45-0.55	7000	60	< 20%	200	188
05055-6000	4.4-5	0.55-0.62	6000	60	< 20%	200	188
0506-5620	4.4-5	0.57-0.67	5620	60	< 20%	200	188
08035-5000	7.4-8	0.33-0.4	5000	60	< 20%	200	188
08045-4000	7.4-8	0.43-0.52	4000	80	< 20%	200	188
08045-4000	7.4-8	0.43-0.53	4000	85	< 20%	200	188
0805-4000	7.5-8.2	0.46-0.55	4000	95	< 20%	200	188
09055-3800	8.4-9	0.5-0.6	3800	100	< 20%	200	188
0907-3500	8.4-9	0.63-0.73	3500	100	< 20%	200	188
11035-3000	10.2-11	0.33-0.43	3000	85	< 20%	200	188
11045UP-3000	10.2-11	0.42-0.52	3000	95	< 20%	200	188
11045-3000	10.2-11	0.44-0.54	3000	95	< 20%	200	188
1105-3000	10.4-11	0.50-0.60	3000	95	< 20%	200	188
1206UP-3000	11.2-12	0.52-0.60	3000	110	< 20%	200	188
1206-3000	11.2-12	0.53-0.63	3000	110	< 20%	200	188
12063-3000	11.3-12	0.55-0.65	3000	110	< 20%	200	188
12068-2500	11.3-12	0.65-0.75	2500	150	< 20%	200	188
1208-2000	11.3-12	0.75-0.85	2000	160	< 20%	200	188
13065-2500	12.3-13	0.6-0.7	2500	170	< 20%	200	188
1307-2000	12.3-13	0.66-0.76	2000	160	< 20%	200	188
1309-1460	12.4-13.4	0.85-0.95	1460	200	< 20%	200	188
1506-2500	14.2-15.2	0.56-0.66	2500	170	< 20%	200	188
1508-1330	14.4-15.4	0.78-0.88	1330	200	< 20%	200	188
1908-1500	18-19	0.77-0.87	1500	230	< 20%	200	188

OUR KEY PRODUCT Steel Seal

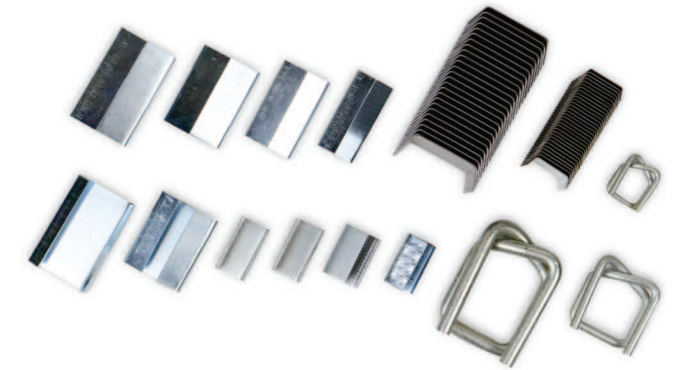


Strapping seals and buckles secure the ends of plastic, steel, and poly strapping for shipping or storage. Seals form a permanent connection and are applied using a sealing tool. Buckles form a nonpermanent connection that allows straps to be retightened as needed.

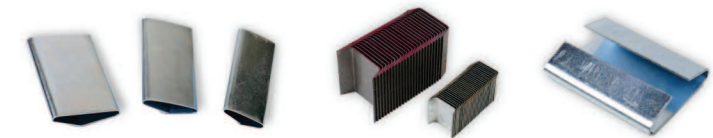

Push-Type (Closed Type)

Magazine-Feed Type

Thread-on Type

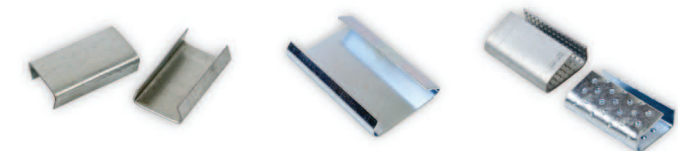

Open Type

Open-Flange Type

Serrated Type

* Customized embossed logo on seal available

OUR KEY PRODUCT Steel Strap

We offer a wide range of steel straps in the most common sizes - steel straps blue and waxed, painted and waxed, galvanized. They are used mainly in strapping of heavy objects, palletization and bundling in metallurgy, wood-working and glass industry.


Coil Winding



Ribbon Wound Coil



Oscillated Wound Coil



Jumbo Wound Coil

Standard Steel Finishing



Blue



Black



Galvanized

Nominal Thickness (mm)	Nominal Width						
	mm inch	9.5 3/8"	12.7 1/2"	16 5/8"	19 3/4"	25.4 (25) 1"	31.75 (32) 1 1/4"
0.4				●	●		
0.5	●		●	●	●		
0.6			●	●	●		
0.7				●	●	●	●
0.8				●	●	●	●
0.9				●	●	●	●
1.0				●	●	●	●
1.1				●	●	●	●



Jiangsu Juhong Strapping Manufacturing Co., Ltd

CONTACT US

Jiangsu Juhong Strapping Manufacturing Co., Ltd

+86 187 6115 1693

No. 32 North Youyi Road, Zouqu, Zhonglou, Changzhou, Jiangsu Prov, China

sales1@jhstrapping.com

www.jsjhpackaging.com

www.jsjhpackaging.com



Jiangsu Juhong Strapping Manufacturing Co., Ltd was established in 1997, has over 20 years of experience in manufacturing packing materials. We are located in Changzhou City, Jiangsu Province.

As the leading factory of steel strapping, PET strapping, steel seal and stretch film. With experience of supplying many Fortune 500 company. There are over 1,000 customers at home and abroad. We offers the most comprehensive strapping solutions to different industries.

We have built a modern quality management system which is in strict accordance with international standards. Adhering to the business principle of mutual benefits, we have had a reliable reputation among our customers.

OUR QUALIFICATION

- INTERTEK SQP
- INTERTEK WCA
- AAR-124
- ISO 9001 / 14001 / 45001
- RoHS
- MSDS
- REACH