


VEGATRONIC 6000 DZ




CONTINUOUS VERTICAL FORM, FILL & SEAL MACHINE

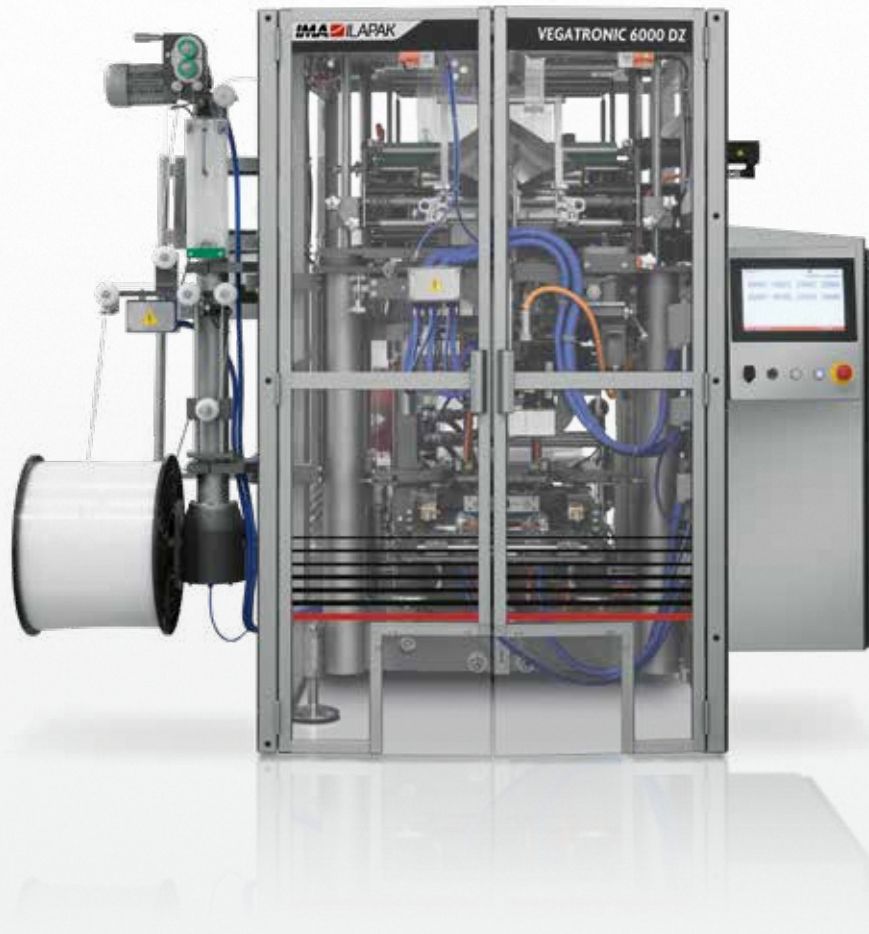

- 1 Complete range of pack styles
- 2 Fully automatic format change by recipe
- 3 High speed
- 4 Ergonomic design for easy cleaning and maintenance
- 5 Compact footprint
- 6 Large bag capability
- 7 Common components with existing Vegatronic 6000
- 8 Wide range of packaging materials

Unrivalled range of pack styles, from Doy style, to Quattro and Pillow. Reclosable Zipper available on Doy style packs.
Fully automatic change-over with great accessibility for easy maintenance.

TECHNICAL DATA



Machine Speed	Pillow bag: 210cpm, Doy and Quattro bags: up to 120cpm		
Wrapping Materials	Heat sealable materials (laminare, co-extruded, recyclable, etc.), polyethylene and paper-based		
Electronic Platform	Industrial PLC B&R, Allen Bradley*		
Program Memory	100 programs		
HMI	12" HMI colour touch screen, Allen Bradley*		
Power Requirement	400 Vac ± 5%, 3 ph, neutral, GND, 50/60 Hz, 15.6 kW, 22.6 A		
Compressed Air	up to 125 l/min at 5 bar (72.5 psi), up to 225 l/min at 5 bar (72.5 psi) for LDPE		
Electrical cabinet	Right-hand version, left-hand version*		
Machine dimensions (W x D x H)	2316 x 2265 x 2004 mm (91.18 x 89.17 x 78.9")		
Machine finishing	Electrostatic epoxy powder coating, stainless steel*		
Machine Weight	1900 kg (4189 lb)		
BAG DIMENSIONS	PILLOW	DOY	QUATTRO
Max. width	280 mm (11"), 270 mm (10.5") for LDPE	270 mm (10.6")	based on max film width of 630 mm
Min. width	50 mm (2")	70 mm (2.8")	70 mm (2.8")
Max. length**	500mm (19.75")	200 mm (7.9")	200 mm (7.9")
FILM REEL DIMENSIONS			
Max. width	Pneumatic shaft: 630 mm (24.75")		
Max. outer diameter	500mm (19.75")		
Core diameter	76 mm (3"), 152 mm (6")*		

* optional

** greater length feasible on request



Ilapak Italia S.p.A.

sales.ilapak.it.bo@ima.it • ilapak.com • ima.it

FOLLOW IMA    

