

# TRAYSEALING THOUGHT & DESIGNED FOR YOU

by **MECAPACK**

## TRAYSEALER O<sup>2</sup> 6000 AUTOMATIC



- + EFFICACY
- + FLEXIBILITY
- + ERGONOMIE
- + INTELLIGENCE MOTION

# O<sup>2</sup> 6000


## The flexible traysealer for your productions

### HIGH LIGHT :

- Compact machine
- Full servo-driven configuration with MECAPACK Intelligent Motion or pneumatical configuration
- Continuous process or step by step compatibility
- Energy consumption optimisation with IM version
- Simple and reliable configuration
- Single and/or double lane configuration
- Full cleanable and openable design
- Full accessibility to the equipment (conveyors, vacuum valve, lifting station, arms...)
- Sealing station with mechanical locking by rod
- Up and downstream MECAPACK design solution (denester, conveyor, top lid...)
- Several tray batch preparation solution possibilities (belt, stopper, customized beam conveyor)

Vacuum and gas configuration with **ECOGAZ kit**

### DIMENSION :

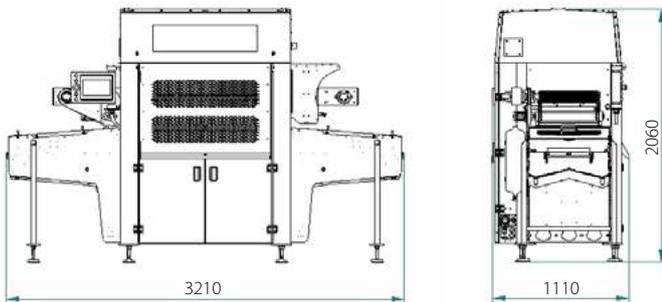

### ENERGY :

**Elec. :** 8 at 20 KW

**Pneu :** 3m<sup>3</sup>/h at 6 bars

**Water :** 100L/h (integrated cooling unit in option)

### PROCESS :

Sealing | Vacuum and gas | Skin

### SPEED :

**Up to :** 25 cpm

### OPTION :

Vacuum and gas configuration with ECOGAZ configuration | Cooling unit | Spotted printed film | Preheating top film station for SKIN application | Tray automatic and integrated denester | Up and downstream MECAPACK conveyor solutions | Integrated printing solution | Automatic filling solution | Integrated tray inliner | Top lid system

### INDICATIVE TRAY DIMENSION :

| Pocket number | 1   | 2   | 3   | 4   | 5   |
|---------------|-----|-----|-----|-----|-----|
| Length (mm)   | 665 | 340 | 340 | 340 | 340 |
| Width (mm)    | 340 | 320 | 205 | 150 | 115 |
| Height (mm)   | 100 | 100 | 100 | 100 | 100 |

### SECTORS :

