

Fibre Metal Cutting Laser

A range of metal cutting fibre laser systems built to Boxford specifications. Our high precision metal cutting fibre lasers are ideally suited to all kinds of training, prototyping and low to medium volume manufacturing applications.




Materials which can be fibre laser processed:

Mild steel
Stainless steel
Aluminium
Anodised aluminium
Zintec
Galvanised steel
Brass
Copper
Shim steel
and more...

Boxford Fibre metal cutting lasers include:

- Fully enclosed system for optimal fume and debris management
- Rigid construction and motion system incorporating high quality Taiwanese linear guide rails and racks, together with Japanese servo drives, allowing speeds of up to 40 metres per minute to be achieved
- Integrated PC control system
- Capacitive auto focus system for automatically adjusting focal length
- Integrated red dot beam pointer for plate location/orientation and program dry run
- Superior fibre laser with up to 100,000 hours life span
- Integrated cutting table with removable slats and material recovery tray
- Optional Boxford supplied extraction system, which is IFA certified and meets the highest testing level (W3), facilitating the extraction of fumes from high alloy steels with over 30% chromium and nickel content

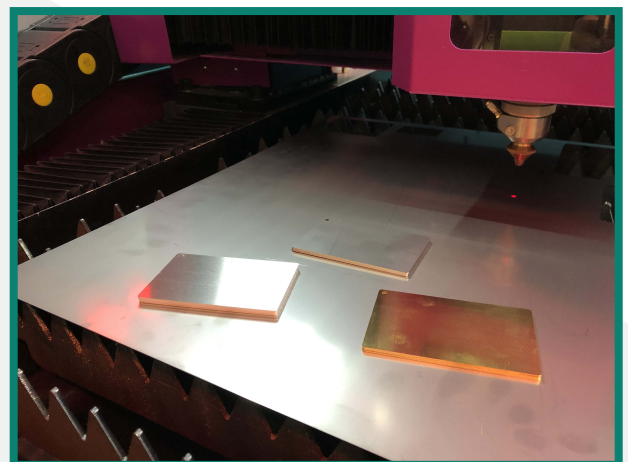

	BFL1390 500w	BFL1390 1kw	BFL1390 1.5kw	BFL2010 1.5kw	BFL2010 2kw
Cutting area (mm)	1300x900	1300x900	1300x900	2000x1000	2000x1000
Z axis travel (mm)	100	100	100	100	100
Laser power source	500w	1kw	1.5kw	1.5kw	2kw
Laser type	Fibre 1070nm WL	Fibre 1070nm WL	Fibre 1070nm WL	Fibre 1070nm WL	Fibre 1070nm WL
Integrated laser cooling system	Water chiller	Water chiller	Water chiller	Water chiller	Water chiller
Cutting thickness (mm)	6mm mild steel ¹ 2mm stainless ² 2mm mild steel ³ 1mm stainless ³	10mm mild steel ¹ 4mm stainless ² 3mm mild steel ³ 1.5mm stainless ³ 3mm aluminium ²	12mm mild steel ¹ 5mm stainless ² 3mm mild steel ³ 2mm stainless ³ 3mm aluminium ²	12mm mild steel ¹ 5mm stainless ² 3mm mild steel ³ 2mm stainless ³ 3mm aluminium ²	15mm mild steel ¹ 6mm stainless ² 4mm mild steel ³ 3mm stainless ³ 4mm aluminium ²
Max cutting speed	40m/min	40m/min	40m/min	40m/min	40m/min
Max acceleration	0.5G	0.5G	0.5G	0.5G	0.5G
Location precision (mm)	<0.01	<0.01	<0.01	<0.01	<0.01
Optics	<0.373mrad beam	<0.373mrad beam	<0.373mrad beam	<0.373mrad beam	<0.373mrad beam
Machine weight	1250kg	1300 kg	1325 kg	1500 kg	1825 kg
Dimensions (w x d x h mm)	2300x2250x1850	2300x2250x1850	2300x2250x1850	3000x2350x1850	3000x2350x1850
Mounting	Floor	Floor	Floor	Floor	Floor
Safety	Class 2 closed configuration	Class 2 closed configuration	Class 2 closed configuration	Class 2 closed configuration	Class 2 closed configuration
Operating modes	Cutting Surface etching	Cutting Surface etching	Cutting Surface etching	Cutting Surface etching	Cutting Surface etching
Compressed air requirements		Extractor only - 6.0 bar @ 420 l/min		Low pressure compressed air cutting and extractor - 6.9 bar @ 650 l/min	High pressure compressed air cutting and extractor - 18 bar @ 1100 l/min
Overall footprint (with extract & ducting)		Extractor at side - 3200x2250mm Extractor at rear - 2300x3150mm		3900x2350mm 3000x3350mm	3900x2350mm 3000x3350mm
Power requirements	220V 1ph @ 32A	380V 3ph @ 15A	380V 3ph @ 32A	380V 3ph @ 32A	380V 3ph @ 32A
Prices from (excl VAT)	£35,945	£40,945	£49,945	£53,495	£69,495

¹ with oxygen gas ² with nitrogen gas ³ with 6 bar compressed air



Included accessories:

- Wireless operator keypad
- Wireless keyboard and mouse
- Chiller based laser source cooling system
- Full day on-site UK mainland training
- Warranty - 2 years (excluding consumable items such as: cutting tips, lens protective glass, support slats and extraction filters)



Optional accessories:

- Bespoke downdraught fume extraction/ air filtration system
- Stand alone compressor for facilitating low pressure non-gas cutting and extraction
- High pressure compressor for non-gas cutting of thick materials
- Additional cutting head consumables (cutting tips, lens protective glass, etc)
- Set of replacement filters for extraction/ air filtration system