

MAXIM

PNEUMATIC TOOLS



+44 (0) 141 552 5591

enquiries@maximpower.co.uk


40 Couper St, Glasgow, G4 0DL

<https://www.maximpower.co.uk/>

MOD. 310

Cod. 12101025

Professional 3/8" impact wrench with composite body. Excellent weight to power ratio. Very lightweight and ergonomic tool, equipped with air exhaust through the handle, air regulator with 3 positions for direction of rotation and swivel air inlet.





"	mm	Nm	Nm		bar	1/4" BSPT	mm	l/sec.	kg	dB(A)	dB(A)	m/sec ²
3/8	12	34-338	583	11.000	6,2	1/4" BSPT	8	2,0	1,20	84±3	95±3	6,8

MOD. 315

Cod. 12102015

Professional 1/2" impact wrench with composite body. Excellent weight to power ratio. Very lightweight and ergonomic tool, equipped with air exhaust through the handle, air regulator with 3 positions for direction of rotation and swivel air inlet.



"	mm	Nm	Nm		bar	1/4" BSPT	mm	l/sec.	kg	dB(A)	dB(A)	m/sec ²
1/2	18	68-786	1.112	7.000	6,2	1/4" BSPT	10	2,0	1,95	92±3	103±3	6,8

MOD. 315/K Cod. 12102014

Mod. 315 in blow mould case, with 1/2" sockets (17 - 19 - 21 mm) and 1/2" deep sockets with plastic cover (17 - 19 - 21 mm).

+44 (0) 141 552 5591

enquiries@maximpower.co.uk



40 Couper St, Glasgow, G4 0DL

<https://www.maximpower.co.uk/>

MOD. 320

Cod. 12103040

Professional 3/4" impact wrench with composite body. Excellent weight to power ratio. Very lightweight and ergonomic tool, equipped with air exhaust through the handle, air regulator with 3 positions for direction of rotation and swivel air inlet.



mod. AC 6/38

Cod. 18000038

Vibration-damping tube with 3/8" connections.

"	mm	Nm	Nm		bar	mm	l/sec.	kg	dB(A)	dB(A)	m/sec ²	
3/4	27	271-1.627	2.034	5.500	6,2	3/8"BSPT	13	4,3	3,30	92,5±3	103,5±3	11,2

+44 (0) 141 552 5591

enquiries@maximpower.co.uk


40 Couper St, Glasgow, G4 0DL

<https://www.maximpower.co.uk/>

MOD. 402

Cod. 12301007

1/4" reversible mini ratchet wrench, ideal to work in small spaces. Composite body with rear exhaust.




Socket Size	Socket Length	Max Torque	Speed	Pressure	Thread	Body Length	Flow Rate	Weight	Sound Power	Sound Pressure	Vibration
"	mm	Nm	1/min	bar		mm	l/sec.	kg	dB(A)	dB(A)	m/sec ²
1/4	8	41	350	6,2	1/4" BSPT	8	2,0	0,50	85±3	96±3	2,6

MOD. 441

Cod. 12301021

1/2" reactionless ratchet wrench. Composite body, rear exhaust and swivel air inlet.



Socket Size	Socket Length	Max Torque	Speed	Pressure	Thread	Body Length	Flow Rate	Weight	Sound Power	Sound Pressure	Vibration
"	mm	Nm	1/min	bar		mm	l/sec.	kg	dB(A)	dB(A)	m/sec ²
1/2	10	95	400	6,2	1/4" BSPT	8	5,0	1,30	90±3	96±3	15,3

MOD. 441/K Cod. 12301022

Mod. 441 in blow mould case, equipped with 7 pcs 1/2" sockets (9-10-11-13-14-17-19 mm), 3 bits L 30 mm, 1/2" universal joint, 75 mm extension bar, bits holder, nipple and oil pot.

+44 (0) 141 552 5591

enquiries@maximpower.co.uk

40 Couper St, Glasgow, G4 0DL

<https://www.maximpower.co.uk/>

MOD. 482


Cod. 12101030

1/2" reversible ratchet wrench. Stronger version, adjustable and very reliable.



MOD. 482/K Cod. 12101031

Mod. 482 in blow mould case, equipped with 7 pcs 1/2" sockets (9 - 10 - 11 - 13 - 14 - 17 - 19 mm), 3 bits L 30 mm, 1/2" universal joint, 75 mm extension bar, bits holder, nipple and oil pot.



Icon	Unit	Value	Icon	Unit	Value	Icon	Unit	Value	Icon	Unit	Value	Icon	Unit	Value
Socket	mm	10	Wrench	Nm	13-115	Wrench	Nm	170	Wrench	bar	6,2	Wrench	mm	8
Wrench	Nm	170	Wrench	Nm	170	Wrench	bar	6,2	Wrench	mm	8	Wrench	l/sec.	8,0
Wrench	bar	6,2	Wrench	mm	8	Wrench	l/sec.	8,0	Wrench	kg	1,20	Wrench	dB(A)	92±3
Wrench	mm	8	Wrench	l/sec.	8,0	Wrench	kg	1,20	Wrench	dB(A)	105±3	Wrench	m/sec ²	3,5

+44 (0) 141 552 5591

enquiries@maximpower.co.uk

40 Couper St, Glasgow, G4 0DL

<https://www.maximpower.co.uk/>

MOD. 380

Cod. 15010040

Reversible composite drill, with 10 mm self tightening composite chuck. Double action trigger. Rear exhaust.



mod. AC 7

Cod. 10700750


Silenced exhaust hose assembly.



mod. AC 100/1

Cod. 17700151

Self tightening composite chuck
(1 ÷ 10 mm. 3/8" x 24 F).



KW											
kW	mm	3/8" x 24F		bar	1/4" BSPT	mm	l/sec.	kg	dB(A)	dB(A)	m/sec ²
0,33	10	3/8" x 24F	1.800	6,2	1/4" BSPT	10	11,7	1,10	85±3	96±3	<2,5

MOD. 383

Cod. 15013020

Reversible composite drill, with 13 mm self tightening metal chuck. Double action trigger. Rear exhaust. Adjustable side handle.



mod. AC 7

Cod. 10700750


Silenced exhaust hose assembly.



mod. AC 82/1

Cod. 17700141

Self tightening metal chuck
(1,5 ÷ 13 mm. 1/2" x 20 F).



KW											
kW	mm	1/2" x 20F		bar	1/4" BSPT	mm	l/sec.	kg	dB(A)	dB(A)	m/sec ²
0,33	13	1/2" x 20F	800	6,2	1/4" BSPT	10	11,7	1,30	86±3	93±3	<2,5

+44 (0) 141 552 5591

enquiries@maximpower.co.uk

40 Couper St, Glasgow, G4 0DL

<https://www.maximpower.co.uk/>


MOD. 610

Cod. 12302020

Straight grip reversible auto shut-off screwdriver. Push start mechanism. Outside adjustable clutch. Supplied with 3 different springs for adjustment of torque. Tool sold in "hard" configuration.



Mod. 610	HARD	MEDIUM	SOFT
	2 - 5,1 Nm	1 - 4,5 Nm	0,5 - 3,5 Nm



1/4" E	5	0,5-5,1	650	6,2	1/4" BSPT	10	7,0	0,60	84±3	93±3	<2,5

+44 (0) 141 552 5591

enquiries@maximpower.co.uk

40 Couper St, Glasgow, G4 0DL

<https://www.maximpower.co.uk/>

MOD. 553

Cod. 16300001

Reciprocating saw equipped with rear air exhaust hose and one blade for steel (32T) and one for aluminium (24T). 10 mm blade stroke.

Blades for reciprocating saw
10 pcs box - Length: 95 mm. Cut: 50 mm. Blade connection: 12,5 x 1 mm.



Mod. AC 20

32 teeth - steel

Cod. 10700120



Mod. AC 21

24 teeth - aluminium


Cod. 10700121



Mod. AC 22

18 teeth - wood

Cod. 10700122



HZ								
	bar	1/4" BSPT	mm	l/sec.	kg	dB(A)	dB(A)	m/sec ²
9.000	6,2	1/4" BSPT	8	4,0	0,80	87,5±3	94,6±3	12,1

MOD. 557/K

Cod. 16300007

Air saw that can be also used as air filer. The files must have a max shank diameter of 4 mm and a stroke length of 10 mm. In blow mould case, equipped with 5 pcs files, 5 pcs 24T blades and 5 pcs 32T blades.



Mod. AC 20

Cod. 10700120

32 teeth - steel



Mod. AC 21

Cod. 10700121

24 teeth - aluminium



Mod. AC 22

Cod. 10700122

18 teeth - wood



Ø 4 mm files



AC 557/1

Cod. 10700141

AC 557/2

Cod. 10700142

AC 557/3


Cod. 10700143

AC 557/4

Cod. 10700144

AC 557/5

Cod. 10700145



HZ								
	bar	1/4" BSPT	mm	l/sec.	kg	dB(A)	dB(A)	m/sec ²
5.000	6,2	1/4" BSPT	10	20	1,10	86±3	96,1±3	4,2

+44 (0) 141 552 5591

enquiries@maximpower.co.uk

40 Couper St, Glasgow, G4 0DL

<https://www.maximpower.co.uk/>

MOD. 250

Cod. 13200050


3-6 mm collet mini die grinde . Air regulator on top, swivel air inlet and rear exhaust. Ergonomic ABS sleeve.



mod. AC 8

Cod. 10700800

Silenced exhaust hose assembly for mod. 250/252/255



KW										
kW	mm	bar	l/sec.	mm	kg	dB(A)	dB(A)	m/sec ²		
0,22	3-6	25.000	6,2	1/4" BSPT	10	8,8	0,57	83±3	87±3	<2,5

MOD. 255

Cod. 13200055


3-6 mm collet extended die grinder. Air regulator on top, swivel air inlet and rear exhaust. Ergonomic ABS sleeve.



mod. AC 8

Cod. 10700800

Silenced exhaust hose assembly for mod. 250/252/255.



KW										
kW	mm	bar	l/sec.	mm	kg	dB(A)	dB(A)	m/sec ²		
0,22	3-6	25.000	6,2	1/4" BSPT	10	8,8	0,86	83±3	87±3	<2,5


MOD. 260

Cod. 13200060

1 HP die grinder for a continuous professional work. Equipped with 3 and 6 mm collets, air regulator, rear exhaust and swivel air inlet. 8 mm collet available on demand (cod. 4052600228).



1HP = 0,75 KW



KW										
kW	mm	bar	l/sec.	mm	kg	dB(A)	dB(A)	m/sec ²		
0,75	3-6	20.000	6,2	1/4" BSPT	10	14,0	0,80	82±3	93±3	3,0

+44 (0) 141 552 5591

enquiries@maximpower.co.uk

40 Couper St, Glasgow, G4 0DL

<https://www.maximpower.co.uk/>


MOD. 265

Cod. 1320065

1 HP extended grinder for a continuous professional work. Equipped with 3 and 6 mm collets, air regulator, rear exhaust and swivel air inlet. 8 mm collet available on demand (cod. 4052600228).



1HP = 0,75 KW

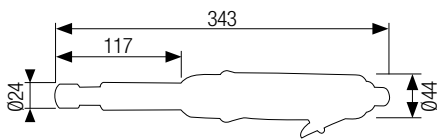


KW										
kW	mm	bar	mm	l/sec.	kg	dB(A)	m/sec ²			
0,75	3-6	18.000	6,2	1/4" BSPT	10	14,0	0,98	83±3	94±3	2,9

MOD. 417

Cod. 13009800

Light and handy ø 125 mm angle grinder, with M14 thread. The protecting case of the wheel can be adjusted in 8 different positions. The abrasive disks must be chosen depending on the work to be performed, they can be either flat or depressed center and must meet the following characteristics: Internal diameter: 22,2 mm - External diameter: 125 mm or less - Thickness: 2,5 to 7 mm - Adequate rotation speed: 12.000 rpm (78,5 m/sec) or greater.




KW										
kW	mm	bar	mm	l/sec.	kg	dB(A)	m/sec ²			
0,60	125x22	12.000	6,2	1/4" BSPT	10	11,8	1,80	86±3	94±3	<2,5

MOD. 516

Cod. 13018006

Powerful (2,5 HP) ø 125 mm angle grinder. Equipped with M14x2.0 spindle, speed governor, rear exhaust, 5 positions adjustable swivel guard and spindle lock that allows quick and easy disc changes. The abrasive disks must be chosen depending on the work to be performed, they can be either flat or depressed center and must meet the following characteristics: Internal diameter: 22,2 mm - External diameter: 125 mm or less - Thickness: 0.8 to 6.35 mm - Adequate rotation speed: 12.000 rpm (78,5 m/sec) or greater.



KW										
kW	mm	bar	mm	l/sec.	kg	dB(A)	m/sec ²			
1,87	125	12.000	6,2	3/8" NPT	16	26,1	1,90	96±3	107±3	5,32

+44 (0) 141 552 5591

enquiries@maximpower.co.uk

40 Couper St, Glasgow, G4 0DL

<https://www.maximpower.co.uk/>

MOD. 532

Cod. 13115200

Random orbital palm sander, Ø 150 mm velcro pad. Very light and ergonomic composite body.



mod. AC 90
Cod. 10702110

Ø 150 mm 6 holes velcro pad. 5/16" x 24F thread

Cod. 1070211002

Original Ø 150 mm velcro pad, without holes. 5/16" x 24F thread



mod. AC 91
Cod. 10702112


Ø 150 mm 6 holes self-stick pad. 5/16" x 24F thread

mod. AC 92
Cod. 10702113

Ø 125 mm velcro pad without holes. 5/16" x 24F thread

mod. AC 93
Cod. 10702114

Ø 125 mm 5 holes velcro pad. 5/16" x 24F thread




5	0,19	150	12.000	6,2	1/4" BSPT	8	5,8	0,78	76±3	88±3	<2,5

MOD. 423

Cod. 13118000

Belt sander for 10 x 330 mm grinding belt. Possibility to hold the arm in the desired position. Rear exhaust and swivel air inlet. Equipped with one 80 grit belt and one 120 grit belt.



10 x 330 mm grinding belt				10 x 330 mm ceramic grinding belt			
10 pcs per pack				10 pcs per pack			
Mod.	Cod.	Grit		Mod.	Cod.	Grit	
AC 19/4	10702215	40		AC 119	10712100	40	
AC 19/8	10702235	60		AC 119/1	10712110	60	
AC 19	10702090	80		AC 119/2	10712120	80	
AC 19/1	10702100	120					

0,37	10x330	18.000	6,2	1/4" BSPT	10	11,2	0,90	86±3	93±3	<2,5

+44 (0) 141 552 5591

enquiries@maximpower.co.uk

40 Couper St, Glasgow, G4 0DL

<https://www.maximpower.co.uk/>

Cod. 500004

46 pcs professional 1/4" socket set. 5 pcs per pack.



Ratchet handle	1/4" x 72T
Extensions	1/4" x 50 mm - 1/4" x 100 mm
Sliding T-Bar	1/4" x 115 mm
Spinner handle	1/4" x 6"
Flex extension	1/4" x 6"
Universal Joint	1/4"
Socket adaptor	1/4"
Hexagonal keys	1,25-1,5-2-2,5 mm
Sockets	1/4" x 4-4,5-5-5,5-6-7-8-9-10-11-12-13-14 mm

Bit sockets	● 3-4-5-6-7 mm
	○ 4-5-5-7 mm
	⊗ T10-T15-T20-T25-T27-T30-T40
	⊕ 1-2-3
	⊕ 1-2-3

Cod. 500018

23 pcs professional 1/2" socket set. 5 pcs per pack.



Ratchet handle	1/2" x 72T
Sockets	1/2" x 10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-27-30-32 mm
Extensions	1/2" x 125 mm - 1/2" x 250 mm
Universal Joint	1/2"
Sliding adaptor	1/2" M x 3/8" F

+44 (0) 141 552 5591

enquiries@maximpower.co.uk

40 Couper St, Glasgow, G4 0DL

<https://www.maximpower.co.uk/>

SPRING BALANCERS BLOW GUN MINI OILER

Balancers with steel cable

ABS housing. Steel springs. Outside spring adjustment.

MADE IN ITALY



Mod.	Cod.	Kg	Cable length	
AC 32	17100070	3,0 - 6,0	2100 mm	
AC 33	17100100	5,0 - 10,0	2100 mm	
AC 34	17100180	13,0 - 19,0	2100 mm	

Blowing gun

Cod. 503612

MADE IN ITALY



1/4" Mini oiler for pneumatic tools.

Cod. 17200011



+44 (0) 141 552 5591

enquiries@maximpower.co.uk

40 Couper St, Glasgow, G4 0DL

<https://www.maximpower.co.uk/>

Polyurethane re-coil hoses

Polyurethane re-coil hoses

The polyurethane has the following advantages:

- it keeps its shape
- it is not sensitive to the deflections
- it is resistant to oils and grease
- Reduced dimensions



MADE IN ITALY

Cod.	Ø In x out	Length	Male swivel connector	
17040551	5,5 x 8 mm	5 m	1/4" BSPT	
17040552	5,5 x 8 mm	7,5 m	1/4" BSPT	
17040553	5,5 x 8 mm	10 m	1/4" BSPT	
17040651	6,5 x 10 mm	5 m	1/4" BSPT	
17040652	6,5 x 10 mm	7,5 m	1/4" BSPT	
17040653	6,5 x 10 mm	10 m	1/4" BSPT	
17040654	6,5 x 10 mm	15 m	1/4" BSPT	
17040803	8 x 12 mm	10 m	3/8" BSPT	
17040804	8 x 12 mm	15 m	3/8" BSPT	

+44 (0) 141 552 5591

enquiries@maximpower.co.uk

40 Couper St, Glasgow, G4 0DL

<https://www.maximpower.co.uk/>




40 Couper Street, Glasgow, G4 0DL

T: 0141 552 5591

E: enquiries@maximpower.co.uk W: www.maximpower.co.uk

Visit us online – scan the code below

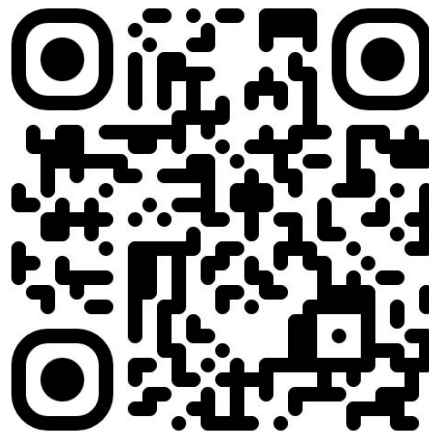

+44 (0) 141 552 5591

enquiries@maximpower.co.uk

40 Couper St, Glasgow, G4 0DL

<https://www.maximpower.co.uk/>