





Shenzhen YONGNUO Electronic Equipment Co., Ltd.
is the first experienced flash factory in China which
also produces lenses and cameras.

TEL: (86) 0755-33001023
Address: Building A, Shenfubao Modern Optics Factory,
Kengzi Street, Pingshan District, Shenzhen, China
E-mail: sales@hkyongnuo.com
After-Sale Service Email: service@hkyongnuo.com
web: www.hkyongnuo.com / th.hkyongnuo.com


 Yongnuo Photography

PRODUCT CATALOGUE

YONGNUO



Shenzhen YONGNUO Electronic Equipment Co., Ltd.
The first experienced flash factory in China which also produces lenses and cameras



Shenzhen YONGNUO Electronic Equipment Co.,Ltd. is the first experienced flash factory in China which also produces lenses and cameras

— YONGNUO was founded in 2006, launched autofocus lenses in 2014, made live cameras in 2021, and made autofocus internal zoom lenses in 2023.

CATALOGUE

Live Camera Series

Live Studio Collection	01
YN433 Indoor Live Camera	02
Camera Parameter Table	03

Automatic Focus Lens

YN56mm F1.4Z DA DSM WL Pro	04
M4/3 Mount Lens	05
Mount Adapter EF-EOS M II	06
X Mount Lens	07
FE/E Mount Lens	08-09
Z Mount Lens	10-11
EF/F Mount Lens	12

Continuous Fill Light Series

YONGNUO Flicker-free LED Stick Light Series	13-16
Flicker-free Bowens Mount Fill Light	17-21
Basic Fill Light	22-25

Macro Ring Flash	26
------------------------	----

Flash and Flash Trigger Series	27-29
--------------------------------------	-------

YONGNUO RF Trigger System Description	30
---	----

Live Studio Collection

01 OUTDOOR

Live Studio Collection

02 GREEN SCREEN

03 DRINKS AND FOOD

04 TECHNOLOGY

05 JEWELRY

06 GARMENT

07 KNOWLEDGE SHARING

08 INTERVIEWS

09 STORES

10 FACTORY

YN433 indoor live camera

YN433 Indoor Live Camera

HD M4/3 frame live streaming camera



Scan the code to watch Video Operation Tutorial



01 Firstly, connect one end of the power cord to the power interface of the device, tighten the upper and lower fixing screws. Press and hold the power button to turn on the device.



02 Connect the one end of the USB cable to the type-C interface on the side of YN433 first;



03 and connect the other end of the USB3.0 cable to the computer (supports Windows)



04 Then lightly press the mode switch button to UVC mode until the indicator light of UVC is on.





YN56mm F1.4Z DA DSM WL Pro

Sharp Focus, Beautiful Blur,
Powerful Golden Focal Length Professional Portrait Lens

Type	YN433 USB Camera Professional Live Camera	★★★★★
Lens Support	Rear Interchangeable M43 Bayonet Lens Interface	
Processor	8-Core, 2.2GHz Main Frequency + 20 Million Pixels, M4/3 Format	
Display Output	Support HDMI interface output 1080p display, support UVC protocol output maximum 4k video stream	
Storage	RAM(6GB)+Flash(64GB)	
External Battery	Support LP-E6 (7.2V) Battery (Purchase Separately)	
WiFi Network/Bluetooth	N/A	
Internet Connection	Support External USB Network Card	
Support Interface	USB3.0 Type-C Interface: Support UVC, MTP USB2.0 Type-C Interface: Support USB2.0 Host Function HDMI Interface; 3.5mm External 3-Section Headphone Jack	
External Power	Support USB QC3.0 protocol, and the input terminal has a fast charging function of 9V or above. (Note: The USB port marked DCIN is the power supply interface)	
Main Application Scenarios	Ultra HD USB Camera; Ultra HD Video Capture, HDMI Output; Outdoor Shooting Video, Time-lapse Photography	
Frame Rate	720p@30fps, 1080p@30fps, 4K@24fps	
Size / Weight	Camera (94*82*33mm, about 360g); Box (141*141*90mm, approx. 715g)	
Package content	YN433 Camera, Adapter, Lens Cap, Type-C 3.0-USB*2, C C*1 Data Cable Product Packing Box, Manual/Warranty Card/Certificate	

- Lens focal length: 56mm
- Frame: APS-C
- Maximum Aperture: F/1.4
- Lens Construction: 10 elements in 9 groups
- Aperture Blades: 9 blades
- Closest Focusing Distance: about 0.6m
- Maximum Magnification: about 0.11 times
- Lens mount: Z Series
- Viewing angle range: Diagonal :26.4°
Vertical:17.04°
Horizontal:22.26°
- Focusing Driving Motor: DSM Digital Stepping Motor
- Maximum Diameter and Length: about φ69×89mm
- Filter Diameter: 58mm
- Remote Control Distance: About 30m
- Weight: about 375g
(Not including front and rear lens cap)



M43Mount




W MICRO

Aperture Value F1.7-F22
 Bayonet M43 mount
 Weight about 180g

YN17mm F1.7M Wide-angle Prime Lens

- Focal Length: 17mm
- Lens Construction: 10 elements in 9 groups
- Aperture Blades: 7 blades
- Maximum Magnification: about 0.15 times
- Closest Focusing Distance: about 0.18m
- Focusing Driving Motor: STM Stepping Motor
- Maximum Diameter and Length: about $\phi 65.8 \times 77.8 \text{mm}$
- Filter Diameter: $\phi 52 \text{mm}$

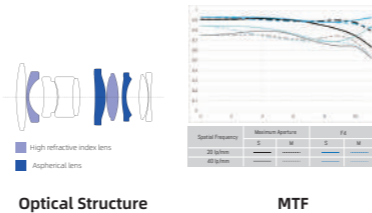


W MICRO

Maximum aperture Value F2.8-F4
 Bayonet M43 mount
 Weight about 318g

YN12-35mm F2.8-4M Standard Zoom Lens Periscope Lens

- Focal Length: 12-35mm
- Lens Construction: 14 elements in 11 groups
- Aperture Blades: 7 blades
- Maximum Magnification: about 0.1 times
- Closest Focusing Distance: about 0.25m
- Focusing Driving Motor: STM Stepping Motor
- Maximum Diameter and Length: about $\phi 72 \times 94 \text{mm}$
- Filter Diameter: $\phi 67 \text{mm}$

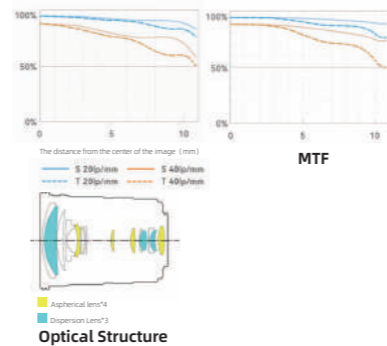


W MICRO

Aperture Value F1.7-F22
 Bayonet M43 mount
 Weight about 150g

YN25mm F1.7M Standard Prime Lens

- Focal Length: 25mm
- Lens Construction: 7 elements in 6 groups
- Aperture Blades: 7 blades
- Maximum Magnification: about 0.20 times
- Closest Focusing Distance: about 0.20m
- Focusing Driving Motor: STM Stepping Motor
- Maximum Diameter and Length: about $\phi 60.8 \times 66.6 \text{mm}$
- Filter Diameter: $\phi 52 \text{mm}$

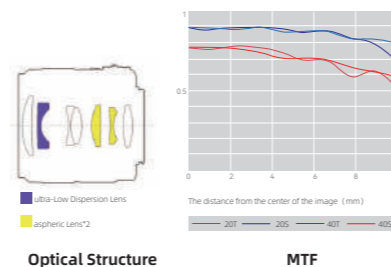


W MICRO

Aperture Value F1.7-F22
 Bayonet M43 mount
 Weight about 146g

YN42.5mm F1.7M II Medium Telephoto Prime Lens

- Focal Length: 42.5mm
- Lens Construction: 9 elements in 8 groups
- Aperture Blades: 7 blades
- Maximum Magnification: about 0.15 times
- Closest Focusing Distance: about 0.30m
- Focusing Driving Motor: STM Stepping Motor
- Maximum Diameter and Length: about $\phi 61.6 \times 55.4 \text{mm}$
- Filter Diameter: $\phi 52 \text{mm}$

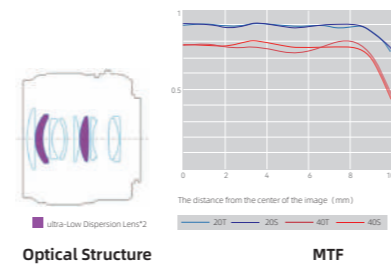

SUPPORTS AUTO FOCUS



ADJUSTABLE APERTURE



SUPPORT IS ANTI-SHAKE



MATT INTERIOR DESIGN

EF-EOS M II

Equipped with water-proof rubber ring

Supports lens anti-shake, higher shooting efficiency
 It supports the anti-shake strategy of the lens IS image stabilizer, which can effectively eliminate image ghosting and blur caused by shaking.

1. The inner wall adopts matte design for purer picture.
2. Added dust-proof and water-proof rubber ring improves dust-proof and waterproof performance.
3. Optimize the precision of the bayonet.
4. Lightweight design.

X Mount

YONGNUO


YN50mm F1.8X DA DSM

X Mount YONGNUO Standard Prime Lens



Angle of view About:30.4°
Lens Frame APS-C
Bayonet X mount

- Maximum Aperture: F/1.8
- Lens Construction: 8 elements in 7 groups
- Aperture Blades: 7 blades
- Closest Focusing Distance: about 0.45m
- Maximum Magnification: about 0.14 times
- Focusing Driving Motor: DSM Digital Stepping Motor
- Maximum Diameter and Length: about $\phi 64 \times 58$ mm
- Weight: about 134g
(Not including front and rear lens cap)

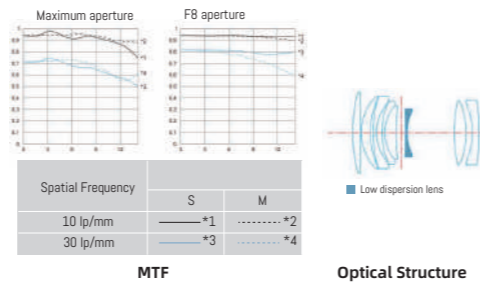


YN50mm F1.8X DA DSM Pro

X Mount YONGNUO Standard Prime Lens



Angle of view About:32.43°
Lens Frame APS-C
Bayonet X mount

- Maximum Aperture: F/1.8
- Lens Construction: 11 elements in 8 groups
- Aperture Blades: 9 blades
- Closest Focusing Distance: about 0.45m
- Maximum Magnification: about 0.15 times
- Focusing Driving Motor: DSM Digital Stepping Motor
- Maximum Diameter and Length: about $\phi 68 \times 85$ mm
- Weight: about 387g
(Not including front and rear lens cap)

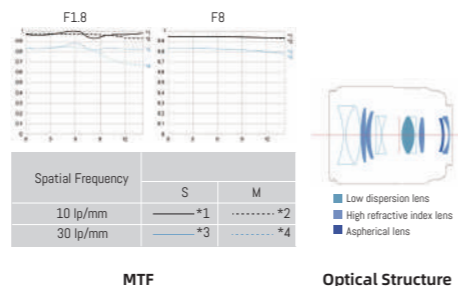

YONGNUO

FE Mount


YN35mm F2S DF DSM YONGNUO Wide-angle Prime Lens



Angle of view About:61.3°
Lens Frame Full Frame
Bayonet E mount

- ✓ USB firmware upgrade
- ✓ Fn function button
- ✓ 14 star effects

- Maximum Aperture: f/2
- Lens Construction: 9 elements in 8 groups
- Aperture Blades: 7 blades
- Maximum Magnification: about 0.13 times
- Closest Focusing Distance: about 0.35m
- Focusing Driving Motor: DSM Digital Stepping Motor
- Maximum Diameter and Length: About $\phi 67 \times 72$ mm
- Filter Diameter: 52mm
- Weight: about 295g
(Not including front and rear lens cap)

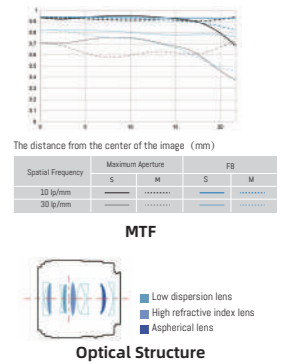


YN50mm F1.8S DF DSM YONGNUO Standard Prime Lens



Angle of view Diagonal:47.82°
Vertical:27.63°
Horizontal:40.23°
Lens Frame Full Frame
Bayonet E mount

- ✓ A dustproof and waterproof rubber ring.
- ✓ USB firmware upgrade
- ✓ Fn function button*2

- Maximum Aperture: f/1.8
- Lens Construction: 11 elements in 8 groups
- Aperture Blades: 9 blades
- Maximum Magnification: about 0.15 times
- Closest Focusing Distance: about 0.45m
- Focusing Driving Motor: DSM Digital Stepping Motor
- Maximum Diameter and Length: About $\phi 68 \times 85$ mm
- Filter Diameter: 58mm
- Weight: about 395g
(Not including front and rear lens cap)

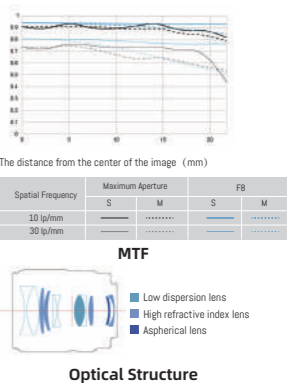


85F1.8S DF DSM YONGNUO Medium Telephoto Prime Lens



Angle of view Diagonal:28.83°
Vertical:16.5°
Horizontal:24.12°
Lens Frame Full Frame
Bayonet E mount

- ✓ Aviation aluminum alloy lens body
- ✓ USB firmware upgrade
- ✓ Fn function button
- ✓ 14 star effects

- Maximum Aperture: f/1.8
- Lens Construction: 9 elements in 8 groups
- Aperture Blades: 7 blades
- Maximum Magnification: about 0.13 times
- Closest Focusing Distance: about 0.8m
- Focusing Driving Motor: DSM Digital Stepping Motor
- Maximum Diameter and Length: about $\phi 67 \times 87$ mm
- Filter Diameter: 58mm
- Weight: about 385g
(Not including front and rear lens cap)

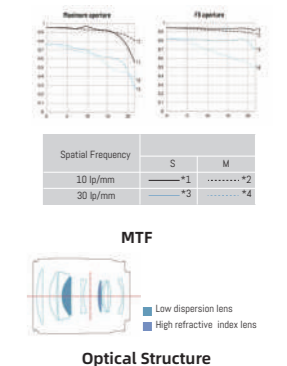

E Mount

YONGNUO




Angle of view
 Diagonal:105°
 Vertical:76°
 Horizontal:94°

Bayonet Lens Frame E mount APS-C

YN11mm F1.8 DA DSM WL E Mount Ultra-wide Angle Prime Lens

- Maximum Aperture: F/1.8
- Lens Construction: 10 elements in 9 groups
- Aperture Blades: 7 blades
- Closest Focusing Distance: about 0.15m
- Maximum Magnification: about 0.15 times
- Focusing Driving Motor: DSM Digital Stepping Motor
- Maximum Diameter and Length: about $\phi 66 \times 69$ mm
- Filter Diameter: 58mm
- Weight: about 260g (Not including front and rear lens cap)

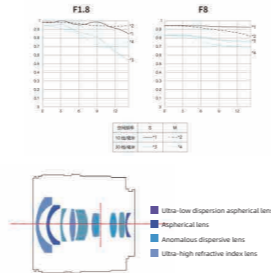


Angle of view
 Diagonal:82.62°
 Vertical:57.62°
 Horizontal:72.35°

Bayonet Lens Frame E mount APS-C

YN16mm F1.8 DA DSM E Mount Large-aperture Wide-angle Lens

- Maximum Aperture: F/1.8
- Lens Construction: 10 elements in 8 groups
- Aperture Blades: 7 blades
- Closest Focusing Distance: about 0.17m
- Maximum Magnification: about 0.15 times
- Focusing Driving Motor: DSM Digital Stepping Motor
- Maximum Diameter and Length: about $\phi 64 \times 69$ mm
- Filter Diameter: 58mm
- Weight: about 273g (Not including front and rear lens cap)

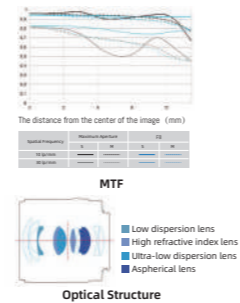


Angle of view
 Diagonal:48.76°
 Vertical:30.7°
 Horizontal:40.54°

Bayonet Lens Frame E mount APS-C

YN33mm F1.45 DA DSM WL Pro YONGNUO E Mount Auto Focus Lens

- Maximum Aperture: F/1.4
- Lens Construction: 11 elements in 9 groups
- Aperture Blades: 9 blades
- Closest Focusing Distance: about 0.4m
- Maximum Magnification: about 0.1 times
- Focusing Driving Motor: DSM Digital Stepping Motor
- Maximum Diameter and Length: about $\phi 69 \times 87$ mm
- Filter Diameter: 58mm
- Weight: about 370g (Not including front and rear lens cap)

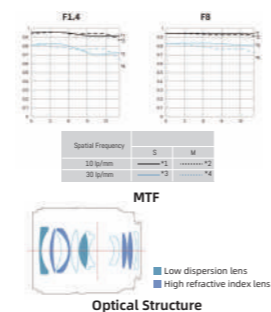


Angle of view
 About:30.4°

Bayonet Lens Frame E mount APS-C

YN50mm F1.8 DA DSM II E mount Digital Standard Prime Lens

- Maximum Aperture: f/1.8
- Lens Construction: 8 elements in 7 groups
- Aperture Blades: 7 blades
- Maximum Magnification: about 0.14 times
- Closest Focusing Distance: about 0.45m
- Focusing Driving Motor: DSM Digital Stepping Motor
- Maximum Diameter and Length: about $\phi 64 \times 58$ mm
- Filter Diameter: 49mm
- Weight: about 134g (Not including front and rear lens cap)

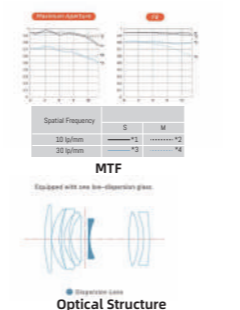

YONGNUO

Z Mount




Angle of view
 About:61.3°

Lens Frame Full Frame
 Bayonet Z mount

YN35mm F2.2 DF DSM YONGNUO Classic Portable Wide-angle Prime Lens

- Maximum Aperture: f/2
- Lens Construction: 9 elements in 8 groups
- Aperture Blades: 7 blades
- Maximum Magnification: about 0.13 times
- Closest Focusing Distance: about 0.35m
- Focusing Driving Motor: DSM Digital Stepping Motor
- Maximum Diameter and Length: about $\phi 68 \times 73$ mm
- Filter Diameter: 52mm
- Weight: about 290g

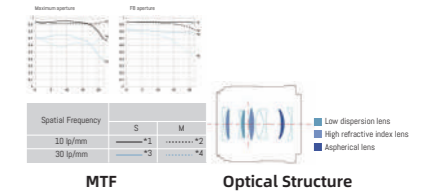


Angle of view
 Diagonal:47.82°
 Vertical:27.63°
 Horizontal:40.23°

Lens Frame Full Frame
 Bayonet Z mount

YN50mm F1.8 DF DSM YONGNUO Standard Prime Lens

- Maximum Aperture: f/1.8
- Lens Construction: 11 elements in 8 groups
- Aperture Blades: 9 blades
- Maximum Magnification: about 0.15 times
- Closest Focusing Distance: about 0.45m
- Focusing Driving Motor: DSM Digital Stepping Motor
- Maximum Diameter and Length: about $\phi 68 \times 87$ mm
- Filter Diameter: 58mm
- Weight: about 417g (Not including front and rear lens cap)

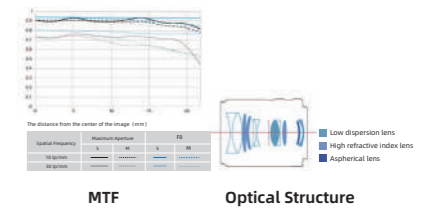


Angle of view
 About:30.4°

Lens Frame APS-C
 Bayonet Z mount

YN50mm F1.8Z DA DSM YONGNUO Z Mount Auto Focus Lens

- Maximum Aperture: f/1.8
- Lens Construction: 8 elements in 7 groups
- Aperture Blades: 7 blades
- Maximum Magnification: about 0.14 times
- Closest Focusing Distance: about 0.45m
- Focusing Driving Motor: DSM Digital Stepping Motor
- Maximum Diameter and Length: about $\phi 67 \times 60$ mm
- Filter Diameter: 49mm
- Weight: about 148g (Not including front and rear lens cap)

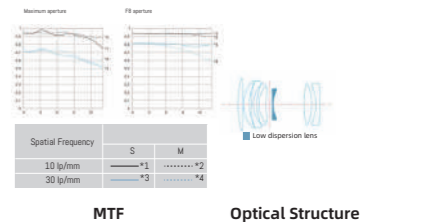


Angle of view
 Diagonal:28.83°
 Vertical:16.5°
 Horizontal:24.12°

Lens Frame Full Frame
 Bayonet Z mount

YN85mm F1.8Z DF DSM YONGNUO Z Mount Auto Focus Lens

- Maximum Aperture: f/1.8
- Lens Construction: 9 elements in 8 groups
- Aperture Blades: 7 blades
- Maximum Magnification: about 0.13 times
- Closest Focusing Distance: about 0.80m
- Focusing Driving Motor: DSM Digital Stepping Motor
- Maximum Diameter and Length: about $\phi 68 \times 89$ mm
- Filter Diameter: 58mm
- Weight: about 405g (Not including front and rear lens cap)

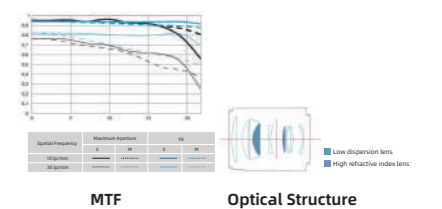


Z Mount



Yongnuo Commander Series
 Lens Frame APS-C
 Bayonet Z mount

YN33mm F1.4Z DA DSM WL Pro Standard Prime Lens


- Maximum Aperture: F/1.4
- Lens Construction: 9 groups 11 elements
- Aperture Blades: 9 blades
- Maximum Magnification: about 0.1 times
- Closest Focusing Distance: about 0.4m
- Driving Motor: Digital Stepping Motor
- Maximum Diameter and Length: about $\Phi 69 \times 89$ mm
- Filter Diameter: 58mm
- Remote Control Distance: About 30m
- Weight: about 378g (Not including front and rear lens cap)

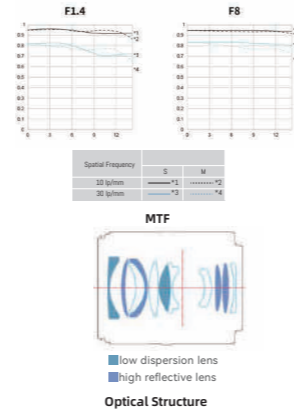

Yongnuo Commander Series
 Lens Frame APS-C
 Bayonet Z mount

YN35mm F1.8Z DA DSM WL Pro Standard Prime Lens


- Maximum Aperture: F/1.8
- Lens Construction: 8 groups 10 elements
- Aperture Blades: 7 blades
- Maximum Magnification: about 0.15 times
- Closest Focusing Distance: about 0.3m
- Driving Motor: Digital Stepping Motor
- Maximum Diameter and Length: about $\Phi 68 \times 64$ mm
- Filter Diameter: 58mm
- Remote Control Distance: About 30m
- Weight: about 182g (Not including front and rear lens cap)

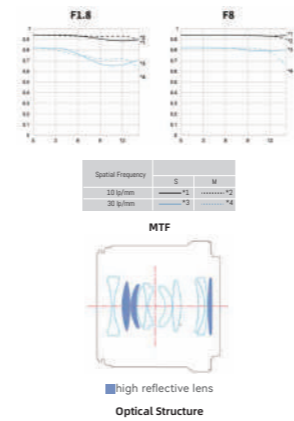

Yongnuo Commander Series
 Lens Frame APS-C
 Bayonet Z mount

YN56mm F1.4Z DA DSM WL Pro Medium Telephoto Prime Lens

- Maximum Aperture: F/1.4
- Lens Construction: 9 groups 10 elements
- Aperture Blades: 9 blades
- Maximum Magnification: about 0.11 times
- Closest Focusing Distance: about 0.6m
- Driving Motor: Digital Stepping Motor
- Maximum Diameter and Length: about $\Phi 69 \times 89$ mm
- Filter Diameter: 58mm
- Remote Control Distance: About 30m
- Weight: about 375g (Not including front and rear lens cap)

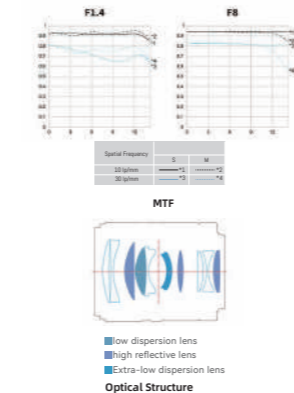

EF/F Mount

YN14mm F2.8 C/N


EF Mount Ultra-wide Angle Prime Lens

A Professional Lens of Capturing Grand View

- * 114° Ultra-wide Angle
- * F2.8 Large Aperture
- * Precision-machined Ultra-low Dispersion Lens and Aspherical Lens
- * Precision-machined Abnormal Dispersion Lens





- Maximum Aperture: F/2.8
- Lens Construction: 9 groups 12 elements
- Aperture Blades: 7 blades
- Closest Focusing Distance: about 0.2m
- Maximum Magnification: about 0.15 times
- Focusing Driving Motor: DC Motor
- Maximum Diameter and Length: about $\Phi 86 \times 105$ mm
- Weight: about 780g (Not including front and rear lens cap)

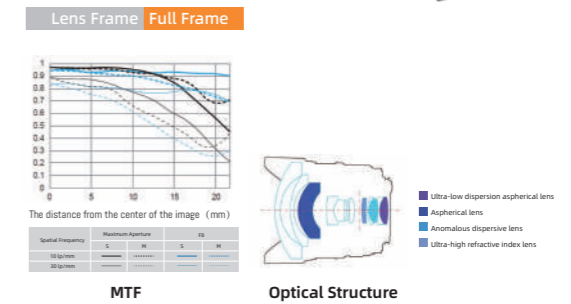

YN50mm F1.8 II

YONGNUO Standard Prime Lens


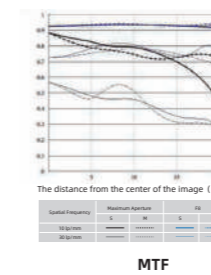


- Maximum Aperture: f/1.8
- Lens Construction: 5 groups 6 elements
- Aperture Blades: 7 blades
- Closest Focusing Distance: about 0.35m
- Maximum Magnification: about 0.21 times
- Focusing Driving Motor: DC Motor
- Maximum diameter and length: About $\Phi 75 \times 51$ mm
- Filter Diameter: 58mm
- Weight: about 162g (Not including front and rear lens cap)



YN35mm F2 C/N

YONGNUO Wide Angle Prime Lens



- Maximum Aperture: f/2
- Lens Construction: 5 groups 7 elements
- Aperture Blades: 7 blades
- Maximum Magnification: about 0.23 times
- Closest Focusing Distance: about 0.25m
- Focusing Driving Motor: DC Motor
- Filter Diameter: 52mm
- Weight: C about 155g, N about 180g (Not including front and rear lens cap)


YN660LED 45W Video Light

Bi-color: 2000K-9900K+RGB
+Reddish and greenish adjustment

100% illumination	Distance	0.3M	0.5M	1M
	Lamp beads	15101Lux	8647Lux	3213Lux
	R	2272Lux	1246Lux	436Lux
	G	4733Lux	2599Lux	897Lux
	B	1289Lux	698Lux	248Lux

*The above tests are average values, the brightness of different lamps might be slightly different.

- Light Source: 672 pcs LED lamp beads & 120 pcs RGB SMD LEDs
- Color Temperature: Bi-color: 2000K- 9900K; RGB full color
- Output Power: 45W
- Compatible Batteries: NP-F series batteries *2
- External Power Source: DC-12V=5A
- Size: 820* 150* 105mm
- Control Distance: <15M
- Average Service Life: 50000h
- Luminance Angle: 55°&110°
- Weight: about 2400g

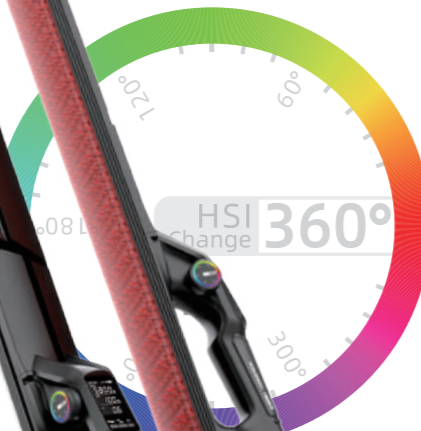

YN660S 60W Video Light

Bi-color: 3200K-5600K

- Light Source: 672 pcs LED lamp beads
- Color Temperature: Bi-color: 3200K- 5600K
- Output Power: 60W
- Compatible Batteries: NP-F series batteries*2(need to be purchased separately)
- External Power Source: DC-12V=5A
- Size: 765* 76* 105mm
- Control Distance: <15M
- Average Service Life: 50000h
- Luminance Angle: 55°
- Weight: about 1430g

100% illumination	Distance	0.3M	0.5M	1M
	3200K	11900Lux	7300Lux	2825Lux
	4000K	21430Lux	12784Lux	4890Lux
	5600K	14854Lux	8852Lux	3455Lux

*The above tests are average values, the brightness of different lamps might be slightly different.



YONGNUO LED Stick Light



YN30Soft 10w LED Stick Light

100% illumination	Distance	0.3M	0.5M	1M
	4000K	2473Lux	1032Lux	348Lux
	R	764Lux	326Lux	101Lux
	G	1825Lux	809Lux	245Lux
	B	527Lux	329Lux	80Lux

YN60Soft 20w LED Stick Light

100% illumination	Distance	0.3M	0.5M	1M
	7000K	4207Lux	1978Lux	706Lux
	R	1169Lux	554Lux	206Lux
	G	2829Lux	1696Lux	587Lux
	B	809Lux	404Lux	136Lux

YN100Soft 30w LED Stick Light

100% illumination	Distance	0.3M	0.5M	1M
	7000K	4421Lux	2234Lux	859Lux
	R	1773Lux	999Lux	387Lux
	G	3629Lux	1950Lux	723Lux
	B	922Lux	452Lux	174Lux



- ✓ 2.4G wireless Control
- ✓ APP Bluetooth Remote Control

Product model	Charging time	Discharge time of white yellow lamp	Discharge time of RGB
YN30SOFT	about 200 min	about 80 min	about 120 min
YN60SOFT	about 125 min	about 123 min	about 151 min
YN100SOFT	about 250 min	about 142 min	about 210 min



Models	YN150 Li	YNLUX100RGB	YNLUX100PRO	YNLUX100	YNLUX200	LUX160	YNRAY100	YNRAY200																																																																																																																																																																																																																																																																																																																																																																																																								
Light Source	LED	COB Lamp Bead	COB Lamp Bead	COB Lamp Bead	COB Lamp Bead	COB Lamp Bead	COB Lamp Bead	COB Lamp Bead																																																																																																																																																																																																																																																																																																																																																																																																								
Material of Bowens Mount	Metal Bayonet	Metal Bayonet	Metal Bayonet	Polymer Material Bayonet	Metal Bayonet	Metal Bayonet	Metal Bayonet	Metal Bayonet																																																																																																																																																																																																																																																																																																																																																																																																								
Optional Color Temperature	Bi-color temperature version 15-120w: 2700-6500K 150w: 3200-5600K	Bi-color temperature version: 2000K-10000K +RGB full color	Bi-color temperature version: 2700K-6500K	Bi-color temperature version: 3200K-5600K Single color temperature version: 5600K	Bi-color temperature version: 2700K-6500K Single color temperature version: 5600K	Bi-color temperature version: 3200K-5600K Single color temperature version: 5600K	Bi-color temperature version: 2700K-6500K Single color temperature version: 5600K	Bi-color temperature version: 2700K-6500K Single color temperature version: 5600K																																																																																																																																																																																																																																																																																																																																																																																																								
Color Rendering Index	≥95	≥96	≥95	≥95	≥95	≥96	≥95	≥95																																																																																																																																																																																																																																																																																																																																																																																																								
App Control Distance	≤50m	≤50m	≤15m	≤50m	≤50m	≤15m	≤50m	≤50m																																																																																																																																																																																																																																																																																																																																																																																																								
2.4G Remote Control Distance	≤100m	≤100m	≤100m	≤15m	≤100m	≤15m	≤100m	≤100m																																																																																																																																																																																																																																																																																																																																																																																																								
External power source	DC 24V ===6.25A	DC 19V === 6.31A	DC 19V === 6.31A	DC 19V === 5.26A	DC 24V === 8.33A	DC 24V === 7.5A	DC 19V === 6.31A	DC 24V === 8.33A																																																																																																																																																																																																																																																																																																																																																																																																								
Interface size	φ5.5*2.1mm	φ5.5*2.1mm	φ5.5*2.1mm	φ5.5*2.1mm	φ5.5*2.1mm	Three-pin aviation plug	φ5.5*2.1mm	Four-pin aviation plug																																																																																																																																																																																																																																																																																																																																																																																																								
Power	150W (Built-in battery) 14.8V/2500mAh(37WH)	120W & 60W(RGB)	120W	100W	200W	180W	120W	200W																																																																																																																																																																																																																																																																																																																																																																																																								
Distance0.5m Lumen Value	19,950 lm	14,364 lm	15,960 lm	13,300 lm	26,600 lm	23,940 lm	15,960 lm	26,600 lm																																																																																																																																																																																																																																																																																																																																																																																																								
Illuminance Value *The above tests are average values, the brightness of different lamps might be slightly different.	<table border="1"> <thead> <tr> <th>Power</th> <th>1M</th> <th>2M</th> <th>3M</th> </tr> </thead> <tbody> <tr> <td>120W</td> <td>2700K 3640Lux</td> <td>1000Lux</td> <td>537Lux</td> </tr> <tr> <td>150W</td> <td>4500K 4550Lux</td> <td>1230Lux</td> <td>666Lux</td> </tr> <tr> <td>150W</td> <td>3200K 4780Lux</td> <td>1320Lux</td> <td>718Lux</td> </tr> <tr> <td>150W</td> <td>5600K 5300Lux</td> <td>1470Lux</td> <td>800Lux</td> </tr> </tbody> </table>	Power	1M	2M	3M	120W	2700K 3640Lux	1000Lux	537Lux	150W	4500K 4550Lux	1230Lux	666Lux	150W	3200K 4780Lux	1320Lux	718Lux	150W	5600K 5300Lux	1470Lux	800Lux	<table border="1"> <thead> <tr> <th>Distance</th> <th>1M</th> <th>2M</th> <th>3M</th> </tr> </thead> <tbody> <tr> <td>Single Light</td> <td>2700K 3400Lux</td> <td>950Lux</td> <td>489Lux</td> </tr> <tr> <td>Single Light</td> <td>5600K 4280Lux</td> <td>1180Lux</td> <td>614Lux</td> </tr> <tr> <td>Single Light</td> <td>6500K 4180Lux</td> <td>1140Lux</td> <td>595Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>600Lux</td> <td>160Lux</td> <td>86Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>1020Lux</td> <td>275Lux</td> <td>142Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>397Lux</td> <td>107Lux</td> <td>55Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>1M</td> <td>2M</td> <td>3M</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>2700K 11100Lux</td> <td>2480Lux</td> <td>1040Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>5600K 14000Lux</td> <td>3140Lux</td> <td>1310Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>6500K 13600Lux</td> <td>3070Lux</td> <td>1280Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>R 1100Lux</td> <td>269Lux</td> <td>130Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>G 1950Lux</td> <td>447Lux</td> <td>214Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>B 863Lux</td> <td>195Lux</td> <td>90Lux</td> </tr> </tbody> </table>	Distance	1M	2M	3M	Single Light	2700K 3400Lux	950Lux	489Lux	Single Light	5600K 4280Lux	1180Lux	614Lux	Single Light	6500K 4180Lux	1140Lux	595Lux	Standard Reflector	600Lux	160Lux	86Lux	Standard Reflector	1020Lux	275Lux	142Lux	Standard Reflector	397Lux	107Lux	55Lux	Dragon-scale Reflector	1M	2M	3M	Dragon-scale Reflector	2700K 11100Lux	2480Lux	1040Lux	Dragon-scale Reflector	5600K 14000Lux	3140Lux	1310Lux	Dragon-scale Reflector	6500K 13600Lux	3070Lux	1280Lux	Dragon-scale Reflector	R 1100Lux	269Lux	130Lux	Dragon-scale Reflector	G 1950Lux	447Lux	214Lux	Dragon-scale Reflector	B 863Lux	195Lux	90Lux	<table border="1"> <thead> <tr> <th>Distance</th> <th>1M</th> <th>2M</th> <th>3M</th> </tr> </thead> <tbody> <tr> <td>Single Light</td> <td>2700K 4600Lux</td> <td>1100Lux</td> <td>500Lux</td> </tr> <tr> <td>Single Light</td> <td>5600K 5622Lux</td> <td>1300Lux</td> <td>600Lux</td> </tr> <tr> <td>Single Light</td> <td>6500K 5488Lux</td> <td>1300Lux</td> <td>600Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>1M</td> <td>2M</td> <td>3M</td> </tr> <tr> <td>Standard Reflector</td> <td>2700K 11836Lux</td> <td>2300Lux</td> <td>1000Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>5600K 14836Lux</td> <td>2900Lux</td> <td>1200Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>6500K 14316Lux</td> <td>2800Lux</td> <td>1200Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>1M</td> <td>2M</td> <td>3M</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>2700K 51498Lux</td> <td>10900Lux</td> <td>4500Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>5600K 64565Lux</td> <td>13700Lux</td> <td>5600Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>6500K 62162Lux</td> <td>13300Lux</td> <td>5400Lux</td> </tr> </tbody> </table>	Distance	1M	2M	3M	Single Light	2700K 4600Lux	1100Lux	500Lux	Single Light	5600K 5622Lux	1300Lux	600Lux	Single Light	6500K 5488Lux	1300Lux	600Lux	Standard Reflector	1M	2M	3M	Standard Reflector	2700K 11836Lux	2300Lux	1000Lux	Standard Reflector	5600K 14836Lux	2900Lux	1200Lux	Standard Reflector	6500K 14316Lux	2800Lux	1200Lux	Dragon-scale Reflector	1M	2M	3M	Dragon-scale Reflector	2700K 51498Lux	10900Lux	4500Lux	Dragon-scale Reflector	5600K 64565Lux	13700Lux	5600Lux	Dragon-scale Reflector	6500K 62162Lux	13300Lux	5400Lux	<table border="1"> <thead> <tr> <th>Distance</th> <th>1M</th> <th>2M</th> <th>3M</th> </tr> </thead> <tbody> <tr> <td>Single Light</td> <td>3200K 4300Lux</td> <td>1000Lux</td> <td>500Lux</td> </tr> <tr> <td>Single Light</td> <td>4000K 5100Lux</td> <td>1300Lux</td> <td>600Lux</td> </tr> <tr> <td>Single Light</td> <td>5600K 4700Lux</td> <td>1200Lux</td> <td>600Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>1M</td> <td>2M</td> <td>3M</td> </tr> <tr> <td>Standard Reflector</td> <td>3200K 11000Lux</td> <td>2300Lux</td> <td>1000Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>4000K 13300Lux</td> <td>2800Lux</td> <td>1200Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>5600K 12500Lux</td> <td>2600Lux</td> <td>1100Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>1M</td> <td>2M</td> <td>3M</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>3200K 47200Lux</td> <td>10500Lux</td> <td>4500Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>4000K 57200Lux</td> <td>12700Lux</td> <td>5500Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>5600K 53300Lux</td> <td>12200Lux</td> <td>5200Lux</td> </tr> </tbody> </table>	Distance	1M	2M	3M	Single Light	3200K 4300Lux	1000Lux	500Lux	Single Light	4000K 5100Lux	1300Lux	600Lux	Single Light	5600K 4700Lux	1200Lux	600Lux	Standard Reflector	1M	2M	3M	Standard Reflector	3200K 11000Lux	2300Lux	1000Lux	Standard Reflector	4000K 13300Lux	2800Lux	1200Lux	Standard Reflector	5600K 12500Lux	2600Lux	1100Lux	Dragon-scale Reflector	1M	2M	3M	Dragon-scale Reflector	3200K 47200Lux	10500Lux	4500Lux	Dragon-scale Reflector	4000K 57200Lux	12700Lux	5500Lux	Dragon-scale Reflector	5600K 53300Lux	12200Lux	5200Lux	<table border="1"> <thead> <tr> <th>Distance</th> <th>1M</th> <th>2M</th> <th>3M</th> </tr> </thead> <tbody> <tr> <td>Single Light</td> <td>5600K 10600Lux</td> <td>2400Lux</td> <td>1200Lux</td> </tr> <tr> <td>Single Light</td> <td>3200K 3800Lux</td> <td>900Lux</td> <td>500Lux</td> </tr> <tr> <td>Single Light</td> <td>4000K 8100Lux</td> <td>2000Lux</td> <td>1000Lux</td> </tr> <tr> <td>Single Light</td> <td>5600K 4300Lux</td> <td>1100Lux</td> <td>500Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>1M</td> <td>2M</td> <td>3M</td> </tr> <tr> <td>Standard Reflector</td> <td>5600K 32600Lux</td> <td>5900Lux</td> <td>2600Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>3200K 11900Lux</td> <td>2400Lux</td> <td>1000Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>4000K 25200Lux</td> <td>5100Lux</td> <td>2200Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>5600K 13400Lux</td> <td>2700Lux</td> <td>1100Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>1M</td> <td>2M</td> <td>3M</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>5600K 118100Lux</td> <td>21800Lux</td> <td>9300Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>3200K 40300Lux</td> <td>8400Lux</td> <td>3500Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>4000K 84500Lux</td> <td>17800Lux</td> <td>7300Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>5600K 45200Lux</td> <td>9300Lux</td> <td>3900Lux</td> </tr> </tbody> </table>	Distance	1M	2M	3M	Single Light	5600K 10600Lux	2400Lux	1200Lux	Single Light	3200K 3800Lux	900Lux	500Lux	Single Light	4000K 8100Lux	2000Lux	1000Lux	Single Light	5600K 4300Lux	1100Lux	500Lux	Standard Reflector	1M	2M	3M	Standard Reflector	5600K 32600Lux	5900Lux	2600Lux	Standard Reflector	3200K 11900Lux	2400Lux	1000Lux	Standard Reflector	4000K 25200Lux	5100Lux	2200Lux	Standard Reflector	5600K 13400Lux	2700Lux	1100Lux	Dragon-scale Reflector	1M	2M	3M	Dragon-scale Reflector	5600K 118100Lux	21800Lux	9300Lux	Dragon-scale Reflector	3200K 40300Lux	8400Lux	3500Lux	Dragon-scale Reflector	4000K 84500Lux	17800Lux	7300Lux	Dragon-scale Reflector	5600K 45200Lux	9300Lux	3900Lux	<table border="1"> <thead> <tr> <th>Distance</th> <th>1M</th> <th>2M</th> <th>3M</th> </tr> </thead> <tbody> <tr> <td>Single Light</td> <td>5600K 7900Lux</td> <td>2200Lux</td> <td>1100Lux</td> </tr> <tr> <td>Single Light</td> <td>2700K 4600Lux</td> <td>1000Lux</td> <td>500Lux</td> </tr> <tr> <td>Single Light</td> <td>4000K 8100Lux</td> <td>2200Lux</td> <td>1100Lux</td> </tr> <tr> <td>Single Light</td> <td>5600K 4400Lux</td> <td>1100Lux</td> <td>600Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>1M</td> <td>2M</td> <td>3M</td> </tr> <tr> <td>Standard Reflector</td> <td>5600K 9600Lux</td> <td>2400Lux</td> <td>1200Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>3200K 4800Lux</td> <td>1100Lux</td> <td>600Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>4000K 9700Lux</td> <td>2400Lux</td> <td>1500Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>5600K 5300Lux</td> <td>1300Lux</td> <td>600Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>1M</td> <td>2M</td> <td>3M</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>5600K 65655Lux</td> <td>10200Lux</td> <td>4300Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>3200K 30400Lux</td> <td>4700Lux</td> <td>1800Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>4000K 53181Lux</td> <td>10100Lux</td> <td>4100Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>5600K 32800Lux</td> <td>5400Lux</td> <td>2100Lux</td> </tr> </tbody> </table>	Distance	1M	2M	3M	Single Light	5600K 7900Lux	2200Lux	1100Lux	Single Light	2700K 4600Lux	1000Lux	500Lux	Single Light	4000K 8100Lux	2200Lux	1100Lux	Single Light	5600K 4400Lux	1100Lux	600Lux	Standard Reflector	1M	2M	3M	Standard Reflector	5600K 9600Lux	2400Lux	1200Lux	Standard Reflector	3200K 4800Lux	1100Lux	600Lux	Standard Reflector	4000K 9700Lux	2400Lux	1500Lux	Standard Reflector	5600K 5300Lux	1300Lux	600Lux	Dragon-scale Reflector	1M	2M	3M	Dragon-scale Reflector	5600K 65655Lux	10200Lux	4300Lux	Dragon-scale Reflector	3200K 30400Lux	4700Lux	1800Lux	Dragon-scale Reflector	4000K 53181Lux	10100Lux	4100Lux	Dragon-scale Reflector	5600K 32800Lux	5400Lux	2100Lux	<table border="1"> <thead> <tr> <th>Distance</th> <th>1M</th> <th>2M</th> <th>3M</th> </tr> </thead> <tbody> <tr> <td>Single Light</td> <td>5600K 5570Lux</td> <td>1510Lux</td> <td>832Lux</td> </tr> <tr> <td>Single Light</td> <td>2700K 4600Lux</td> <td>1100Lux</td> <td>500Lux</td> </tr> <tr> <td>Single Light</td> <td>5600K 5622Lux</td> <td>1300Lux</td> <td>600Lux</td> </tr> <tr> <td>Single Light</td> <td>6500K 5488Lux</td> <td>1300Lux</td> <td>600Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>1M</td> <td>2M</td> <td>3M</td> </tr> <tr> <td>Standard Reflector</td> <td>5600K 26500Lux</td> <td>5210Lux</td> <td>2200Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>2700K 18600Lux</td> <td>3750Lux</td> <td>1570Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>4000K 9700Lux</td> <td>4780Lux</td> <td>2040Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>5600K 23200Lux</td> <td>4750Lux</td> <td>2010Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>1M</td> <td>2M</td> <td>3M</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>5600K 45000Lux</td> <td>8260Lux</td> <td>4300Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>2700K 51498Lux</td> <td>10900Lux</td> <td>4500Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>4000K 64565Lux</td> <td>13700Lux</td> <td>5600Lux</td> </tr> <tr> <td>Dragon-scale Reflector</td> <td>6500K 62162Lux</td> <td>13300Lux</td> <td>5400Lux</td> </tr> </tbody> </table>	Distance	1M	2M	3M	Single Light	5600K 5570Lux	1510Lux	832Lux	Single Light	2700K 4600Lux	1100Lux	500Lux	Single Light	5600K 5622Lux	1300Lux	600Lux	Single Light	6500K 5488Lux	1300Lux	600Lux	Standard Reflector	1M	2M	3M	Standard Reflector	5600K 26500Lux	5210Lux	2200Lux	Standard Reflector	2700K 18600Lux	3750Lux	1570Lux	Standard Reflector	4000K 9700Lux	4780Lux	2040Lux	Standard Reflector	5600K 23200Lux	4750Lux	2010Lux	Dragon-scale Reflector	1M	2M	3M	Dragon-scale Reflector	5600K 45000Lux	8260Lux	4300Lux	Dragon-scale Reflector	2700K 51498Lux	10900Lux	4500Lux	Dragon-scale Reflector	4000K 64565Lux	13700Lux	5600Lux	Dragon-scale Reflector	6500K 62162Lux	13300Lux	5400Lux	<table border="1"> <thead> <tr> <th>Distance</th> <th>1M</th> <th>2M</th> <th>3M</th> </tr> </thead> <tbody> <tr> <td>Single Light</td> <td>5600K 9120Lux</td> <td>2410Lux</td> <td>1260Lux</td> </tr> <tr> <td>Single Light</td> <td>2700K 6720Lux</td> <td>1880Lux</td> <td>967Lux</td> </tr> <tr> <td>Single Light</td> <td>5600K 8440Lux</td> <td>2390Lux</td> <td>1270Lux</td> </tr> <tr> <td>Single Light</td> <td>6500K 8200Lux</td> <td>2310Lux</td> <td>1230Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>1M</td> <td>2M</td> <td>3M</td> </tr> <tr> <td>Standard Reflector</td> <td>5600K 34500Lux</td> <td>6830Lux</td> <td>2950Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>2700K 28600Lux</td> <td>2740Lux</td> <td>2550Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>4000K 36500Lux</td> <td>7360Lux</td> <td>3200Lux</td> </tr> <tr> <td>Standard Reflector</td> <td>6500K 35600Lux</td> <td>7160Lux</td> <td>3150Lux</td> </tr> </tbody> </table>	Distance	1M	2M	3M	Single Light	5600K 9120Lux	2410Lux	1260Lux	Single Light	2700K 6720Lux	1880Lux	967Lux	Single Light	5600K 8440Lux	2390Lux	1270Lux	Single Light	6500K 8200Lux	2310Lux	1230Lux	Standard Reflector	1M	2M	3M	Standard Reflector	5600K 34500Lux	6830Lux	2950Lux	Standard Reflector	2700K 28600Lux	2740Lux	2550Lux	Standard Reflector	4000K 36500Lux	7360Lux	3200Lux	Standard Reflector	6500K 35600Lux	7160Lux	3150Lux
Power	1M	2M	3M																																																																																																																																																																																																																																																																																																																																																																																																													
120W	2700K 3640Lux	1000Lux	537Lux																																																																																																																																																																																																																																																																																																																																																																																																													
150W	4500K 4550Lux	1230Lux	666Lux																																																																																																																																																																																																																																																																																																																																																																																																													
150W	3200K 4780Lux	1320Lux	718Lux																																																																																																																																																																																																																																																																																																																																																																																																													
150W	5600K 5300Lux	1470Lux	800Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Distance	1M	2M	3M																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	2700K 3400Lux	950Lux	489Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	5600K 4280Lux	1180Lux	614Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	6500K 4180Lux	1140Lux	595Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	600Lux	160Lux	86Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	1020Lux	275Lux	142Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	397Lux	107Lux	55Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	1M	2M	3M																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	2700K 11100Lux	2480Lux	1040Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	5600K 14000Lux	3140Lux	1310Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	6500K 13600Lux	3070Lux	1280Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	R 1100Lux	269Lux	130Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	G 1950Lux	447Lux	214Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	B 863Lux	195Lux	90Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Distance	1M	2M	3M																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	2700K 4600Lux	1100Lux	500Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	5600K 5622Lux	1300Lux	600Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	6500K 5488Lux	1300Lux	600Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	1M	2M	3M																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	2700K 11836Lux	2300Lux	1000Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	5600K 14836Lux	2900Lux	1200Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	6500K 14316Lux	2800Lux	1200Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	1M	2M	3M																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	2700K 51498Lux	10900Lux	4500Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	5600K 64565Lux	13700Lux	5600Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	6500K 62162Lux	13300Lux	5400Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Distance	1M	2M	3M																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	3200K 4300Lux	1000Lux	500Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	4000K 5100Lux	1300Lux	600Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	5600K 4700Lux	1200Lux	600Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	1M	2M	3M																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	3200K 11000Lux	2300Lux	1000Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	4000K 13300Lux	2800Lux	1200Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	5600K 12500Lux	2600Lux	1100Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	1M	2M	3M																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	3200K 47200Lux	10500Lux	4500Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	4000K 57200Lux	12700Lux	5500Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	5600K 53300Lux	12200Lux	5200Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Distance	1M	2M	3M																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	5600K 10600Lux	2400Lux	1200Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	3200K 3800Lux	900Lux	500Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	4000K 8100Lux	2000Lux	1000Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	5600K 4300Lux	1100Lux	500Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	1M	2M	3M																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	5600K 32600Lux	5900Lux	2600Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	3200K 11900Lux	2400Lux	1000Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	4000K 25200Lux	5100Lux	2200Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	5600K 13400Lux	2700Lux	1100Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	1M	2M	3M																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	5600K 118100Lux	21800Lux	9300Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	3200K 40300Lux	8400Lux	3500Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	4000K 84500Lux	17800Lux	7300Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	5600K 45200Lux	9300Lux	3900Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Distance	1M	2M	3M																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	5600K 7900Lux	2200Lux	1100Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	2700K 4600Lux	1000Lux	500Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	4000K 8100Lux	2200Lux	1100Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	5600K 4400Lux	1100Lux	600Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	1M	2M	3M																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	5600K 9600Lux	2400Lux	1200Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	3200K 4800Lux	1100Lux	600Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	4000K 9700Lux	2400Lux	1500Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	5600K 5300Lux	1300Lux	600Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	1M	2M	3M																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	5600K 65655Lux	10200Lux	4300Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	3200K 30400Lux	4700Lux	1800Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	4000K 53181Lux	10100Lux	4100Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	5600K 32800Lux	5400Lux	2100Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Distance	1M	2M	3M																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	5600K 5570Lux	1510Lux	832Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	2700K 4600Lux	1100Lux	500Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	5600K 5622Lux	1300Lux	600Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	6500K 5488Lux	1300Lux	600Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	1M	2M	3M																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	5600K 26500Lux	5210Lux	2200Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	2700K 18600Lux	3750Lux	1570Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	4000K 9700Lux	4780Lux	2040Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	5600K 23200Lux	4750Lux	2010Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	1M	2M	3M																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	5600K 45000Lux	8260Lux	4300Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	2700K 51498Lux	10900Lux	4500Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	4000K 64565Lux	13700Lux	5600Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Dragon-scale Reflector	6500K 62162Lux	13300Lux	5400Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Distance	1M	2M	3M																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	5600K 9120Lux	2410Lux	1260Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	2700K 6720Lux	1880Lux	967Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	5600K 8440Lux	2390Lux	1270Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Single Light	6500K 8200Lux	2310Lux	1230Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	1M	2M	3M																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	5600K 34500Lux	6830Lux	2950Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	2700K 28600Lux	2740Lux	2550Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	4000K 36500Lux	7360Lux	3200Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Standard Reflector	6500K 35600Lux	7160Lux	3150Lux																																																																																																																																																																																																																																																																																																																																																																																																													
Built-in Light Adjustment Curves	Exponential Function, Sine Function, Logarithmic Function, Linear Function	Exponential Function, Sine Function, Logarithmic Function, Linear Function	Exponential Function, Sine Function, Logarithmic Function, Linear Function	Linear Function	Exponential Function, Sine Function, Logarithmic Function, Linear Function	Linear Function	Exponential Function, Sine Function, Logarithmic Function, Linear Function	Exponential Function, Sine Function, Logarithmic Function, Linear Function																																																																																																																																																																																																																																																																																																																																																																																																								
Various Special Modes	Bi-color temperature version: FX12	Bi-color temperature version: FX31	Single color temperature version: FX12	Single color temperature version: FX9 Bi-color temperature version: FX12	Single color temperature version: FX9 Bi-color temperature version: FX12	Single color temperature version: FX9 Bi-color temperature version: FX12	Single color temperature version: FX9 Bi-color temperature version: FX12	Single color temperature version: FX9 Bi-color temperature version: FX12																																																																																																																																																																																																																																																																																																																																																																																																								
Layout Function	√	√	-	-	√	-	√	√																																																																																																																																																																																																																																																																																																																																																																																																								
Volume of Light	14.8 * 8.8 * 8.8cm	12*12.5*12.5cm	12*12.5*12.5cm	12*12.5*12.5cm	32*18*16.5cm	32*18*16.5cm	25.2*13.7*31.4cm	43.5*17.1*32.1cm																																																																																																																																																																																																																																																																																																																																																																																																								
Packing Size	43*20*32.5cm (KIT Version) 18.5*12.5*13cm (Single Light Version)	43*20*32.5cm (KIT Version) 18*17*16.5cm (Single Light Version)	43*20*32cm (KIT Version) 18*17*16.5cm (Single Light Version)	43*20*32cm (KIT Version) 18*17*16.5cm (Single Light Version)	43*20*32.5cm (KIT Version) 23.5*18*16.5cm (Single Light Version)	59*24*25cm	51*22*38cm (KIT Version) 33*32*18.5cm (Single Light Version)	45*45*32.5cm																																																																																																																																																																																																																																																																																																																																																																																																								
Weight of Light	≈ 0.8kg	≈ 0.965kg	≈ 0.88kg	≈ 0.77kg	≈ 1.342kg	≈ 2.0kg	≈ 1.85kg	≈ 2.796kg																																																																																																																																																																																																																																																																																																																																																																																																								
Package Weight	≈ 4.05kg (KIT Version) ≈ 0.93kg (Single Light Version)	≈ 3.75kg (KIT Version) ≈ 1.2kg (Single Light Version)	≈ 3.55kg (KIT Version) ≈ 1kg (Single Light Version)	≈ 3.6kg (KIT Version) ≈ 1kg (Single Light Version)	≈ 4.25kg (KIT Version) ≈ 1.52kg (Single Light Version)	≈ 6.35kg (KIT Version) ≈ 3.92kg (Single Light Version)	≈ 5.01kg (KIT Version) ≈ 2.45kg (Single Light Version)	≈ 6.45kg																																																																																																																																																																																																																																																																																																																																																																																																								
Package Contents	Kit version includes video light*1, power adapter*1, power cord*1, NP-F series battery handle*1, silicon soft cover*1, portable case*1, user manual (certificate card, warranty card are included)*1 Single lamp includes Video light*1, user manual (certificate card, warranty card are included)*1	Kit version includes Contents: Video light*1, Power adapter*1, power line*1, Standard Reflector*1, Battery handle*1, Standard Reflector*1, User Manual*1 Single lamp includes Video light*1, User Manual*1	Kit version includes LED Video Light*1, Power adapter*1, Power cord*1, NP-F Series battery handle*1, Standard reflector*1, Portable case*1, User Manual*1 Single lamp includes LED Video Light*1, User Manual*1	Kit version includes LED Video Light*1, Power adapter*1, Power cord*1, NP-F Series battery handle*1, Standard reflector*1, Portable case*1, User Manual*1 Single lamp includes LED Video Light*1, User Manual*1	Kit version includes LED Video Light*1, Power adapter*1, Power cord*1, NP-F Series battery handle*1, Standard reflector*1, Portable case*1, User Manual*1 Single lamp includes LED Video Light*1, User Manual*1	Kit version includes LED Video Light*1, Power adapter*1, Power cord*1, V-mount battery adapter cable*1, Standard reflector*1, Soft grip*1 lanyard*1, V-port battery handbag*1, Storage bag*1, User Manual*1 Single lamp includes LED Video Light*1, Power adapter*1, Power cord*1, Standard reflector*1, User Manual*1	Kit version includes LED Video Light*1, Power adapter*1, Power cord*1, Standard reflector*1, Storage bag*1, User Manual*1 Single lamp includes LED Video Light*1, User Manual*1	Contents: LED Video Light*1, Power adapter*1, Dragon-scale Standard reflector*1, Power cord*1, Standard reflector*1, User Manual*1																																																																																																																																																																																																																																																																																																																																																																																																								



YNLUX100RGB 120W

Handheld Full color RGB fill-in light

- Light Source: Full color COB
- Color Temperature Version: 2000K-10000K and full color RGB
- Output Power: LED: Constant power 120W
(Color temperature changes with power unchanged)
- External power source: DC 19V \approx 6.31A Interface size, ϕ 5.5*2.1mm
- Compatible batteries: Two NP-F series batteries
(Need to be purchased separately.)
- Special Effect Mode: 31
- APP Bluetooth control: \leq 50m 2.4G wireless control: \leq 100m
- Product Net Size: 12*12.5*12.5cm

Bi-color temperature versio (Single light)				Bi-color temperature version (Standard Reflector)				Bi-color temperature version (Single light)				Bi-color temperature version (Standard Reflector)			
Distance	1M	2M	3M	Distance	1M	2M	3M	Distance	1M	2M	3M	Distance	1M	2M	3M
2700K	3400Lux	950Lux	489Lux	2700K	11100Lux	2480Lux	1040Lux	R	600Lux	160Lux	86Lux	R	1100Lux	269Lux	130Lux
5600K	4280Lux	1180Lux	614Lux	5600K	14000Lux	3140Lux	1310Lux	G	1020Lux	275Lux	142Lux	G	1950Lux	447Lux	214Lux
6500K	4180Lux	1140Lux	595Lux	6500K	13600Lux	3070Lux	1280Lux	B	397Lux	107Lux	55Lux	B	863Lux	195Lux	90Lux

* This is an averaged result,the number might be slightly different on each light.

YNLUX100PRO 120W

Handheld bi-color temperature fill-in light

- Light Source: One COB lamp bead
- Color Temperature Version: Bi-color: 2700K- 6500K;
- Output Power: LED: 120W
- External Battery: 2pcs NP-F series batteries / 1pc V mount battery (need to be purchased separately)
- The net weight of the light: about 0.88kg
- Special Effect Mode: 12
- External Power Source: DC 19V \approx 6.31A

Metal Material
Bowens Mount



Bi-color temperature version (Single light)				Bi-color temperature version (Standard Reflector)				Bi-color temperature version (Dragon-scale Armor)			
Distance	1M	2M	3M	Distance	1M	2M	3M	Distance	1M	2M	3M
2700K	4600Lux	1100Lux	500Lux	2700K	11836Lux	2300Lux	1000Lux	2700K	51498Lux	10900Lux	4500Lux
5600K	5622Lux	1300Lux	600Lux	5600K	14836Lux	2900Lux	1200Lux	5600K	64565Lux	13700Lux	5600Lux
6500K	5488Lux	1300Lux	600Lux	6500K	14316Lux	2800Lux	1200Lux	6500K	62162Lux	13300Lux	5400Lux

* This is an averaged result,the number might be slightly different on each light.

YNLUX100 100W

Handheld fill-in light

- Light Source: One COB lamp bead
- Color Temperature Version: Bi-color: 3200K- 5600K; White: 5600K
- Output Power: LED: 100W
- External Battery: 2pcs NP-F series batteries / 1pc V mount battery (need to be purchased separately)
- Special Effect Mode: White:9, bi-color:12
- The net weight of the light: about 0.77kg
- External Power Source: DC 19V \approx 5A / 19V \approx 5.26A

Bi-color temperature version (Single light)				Bi-color temperature version (Standard Reflector)				Bi-color temperature version (Dragon-scale Armor)			
Distance	1M	2M	3M	Distance	1M	2M	3M	Distance	1M	2M	3M
3200K	4300Lux	1000Lux	500Lux	3200K	11000Lux	2300Lux	1000Lux	3200K	47200Lux	10500Lux	4500Lux
4000K	5100Lux	1300Lux	600Lux	4000K	13300Lux	2800Lux	1200Lux	400K	57200Lux	12700Lux	5500Lux
5600K	4700Lux	1200Lux	600Lux	5600K	12500Lux	2600Lux	1100Lux	5600K	53300Lux	12200Lux	5200Lux

* This is an averaged result,the number might be slightly different on each light.



YNLUX200

200W Pro LED Video Light

- Color temperature: 2700K-6500K/5600K
- Output power: constant power 200W
(Color temperature changes, power remains unchanged)
- External battery: 2pcs NP-F series batteries or 1pc V mount battery for power supply
- External power: DC 24V \approx 8.33A
- Interface size: ϕ 5.5*2.1mm
- The size of the video light: 18*12.5*12.5mm

Bi-color temperature version (Single light)				Bi-color temperature version (Standard Reflector)				Bi-color temperature version (Dragon-scale Armor)			
Distance	1M	2M	3M	Distance	1M	2M	3M	Distance	1M	2M	3M
5600K	9120Lux	2410Lux	1260Lux	5600K	20900Lux	4710Lux	2160Lux	5600K	77600Lux	17600Lux	7430Lux
2700K	6720Lux	1880Lux	967Lux	2700K	15900Lux	3650Lux	1650Lux	2700K	54200Lux	12800Lux	5360Lux
5600K	8440Lux	2390Lux	1270Lux	5600K	20100Lux	4700Lux	2160Lux	5600K	68600Lux	16100Lux	6760Lux
6500K	8200Lux	2310Lux	1230Lux	6500K	19400Lux	4500Lux	2030Lux	6500K	65500Lux	15500Lux	6500Lux

* This is an averaged result,the number might be slightly different on each light.

YNRAY200 200W

- Light source: COB lamp bead
- Output power: constant power 200W
- Special effect modes: White:9, bi-color:12
- Mount: general bowens mount
- Color temperature: 2700K-6500K/5600K
- LED video light size: 25.2 * 13.7 * 31.4cm
- External power supply: DC 24V \approx 8.33A,
- Interface size ϕ 5.5 * 2.1mm

Bi-color temperature version (Single light)				Bi-color temperature version (Standard Reflector)				Single color temperature (Single light)			
Distance	1M	2M	3M	Distance	1M	2M	3M	Distance	1M	2M	3M
2700K	6720Lux	1880Lux	967Lux	2700K	28600Lux	5740Lux	2550Lux	5600K	9120Lux	2410Lux	1260Lux
5600K	8440Lux	2390Lux	1270Lux	5600K	36500Lux	7360Lux	3200Lux	Single color temperature (Specially equipped standard cover)			
6500K	8200Lux	2310Lux	1230Lux	6500K	35600Lux	7160Lux	3150Lux	5600K	34500Lux	6830Lux	2950Lux
5600K	9120Lux	2410Lux	1260Lux	5600K	34500Lux	6830Lux	2950Lux				

* This is an averaged result,the number might be slightly different on each light.

YONGNUO self-developed imaging lens group

36° wide lens

X times illuminance improvement

aspherical lens

slight narrow color fringing

aluminum alloy die-casting

optical coating

random cut light

color sheet replacement

Spotlight SPL100



150W

Mini bowens mount
COB video light

PORTABLE & POWERFUL WIN IN THE FUTURE

YN150Li Built-in Lithium Battery LED video Light

150W Single light (Bi-color temperature version: 3200-5600K)

Distance	1m	2m	3m
Illumination			
3200K	4780Lux	1320Lux	718Lux
5600K	5300Lux	1470Lux	800Lux

150W Standard reflector (Bi-color temperature version: 3200-5600K)

Distance	1m	2m	3m
Illumination			
3200K	15800Lux	3840Lux	1690Lux
5600K	18000Lux	4270Lux	1890Lux

120W Single light (Bi-color temperature version: 2700-6500K)

Distance	1m	2m	3m
Illumination			
2700K	3640Lux	1000Lux	537Lux
6500K	4550Lux	1230Lux	666Lux

120W Standard reflector (Bi-color temperature version: 2700-6500K)

Distance	1m	2m	3m
Illumination			
2700K	12000Lux	2850Lux	1280Lux
6500K	15000Lux	3560Lux	1580Lux

*This is an averaged result, the number might be slightly different on each light.

- Light source: LED
- Color temperature version: 15W~120W: 2700K-6500K; 150W: 3200K-5600K
- Rated power: Constant power 150W (Color temperature changes with power unchanged)
- External power source: DC 24V \approx 6.25A, Interface size, ϕ 5.5*2.1mm
- APP Bluetooth control: \leq 50m
- 2.4G wireless control: \leq 100m
- Average service life: 50000H
- Built-in battery: 14.8V/2500mAh (37WH)
- charging time: 2.5H
- Product net size: 14.8*8.8 * 8.8cm


YNPAD100 Universal Version



Bi-color temperature version (Single light)				Full color RGB version (Bi-color temperature)			
Distance	1M	2M	3M	Distance	1M	2M	3M
2700K	3480Lux	1170Lux	559Lux	2700K	3270Lux	1020Lux	530Lux
5600K	4160Lux	1380Lux	654Lux	5600K	3970Lux	1200Lux	654Lux
6500K	4140Lux	1370Lux	651Lux	10000K	3750Lux	1120Lux	601Lux
8500K	4010Lux	1320Lux	630Lux				

Full color RGB version (Bi-color temperature)				Single color temperature version			
Distance	1M	2M	3M	Distance	1M	2M	3M
R	1780Lux	565Lux	310Lux	5600K	4210Lux	1200Lux	669Lux
G	2590Lux	759Lux	446Lux				
B	790Lux	225Lux	120Lux				

*This is an averaged result, the number might be slightly different on each light.

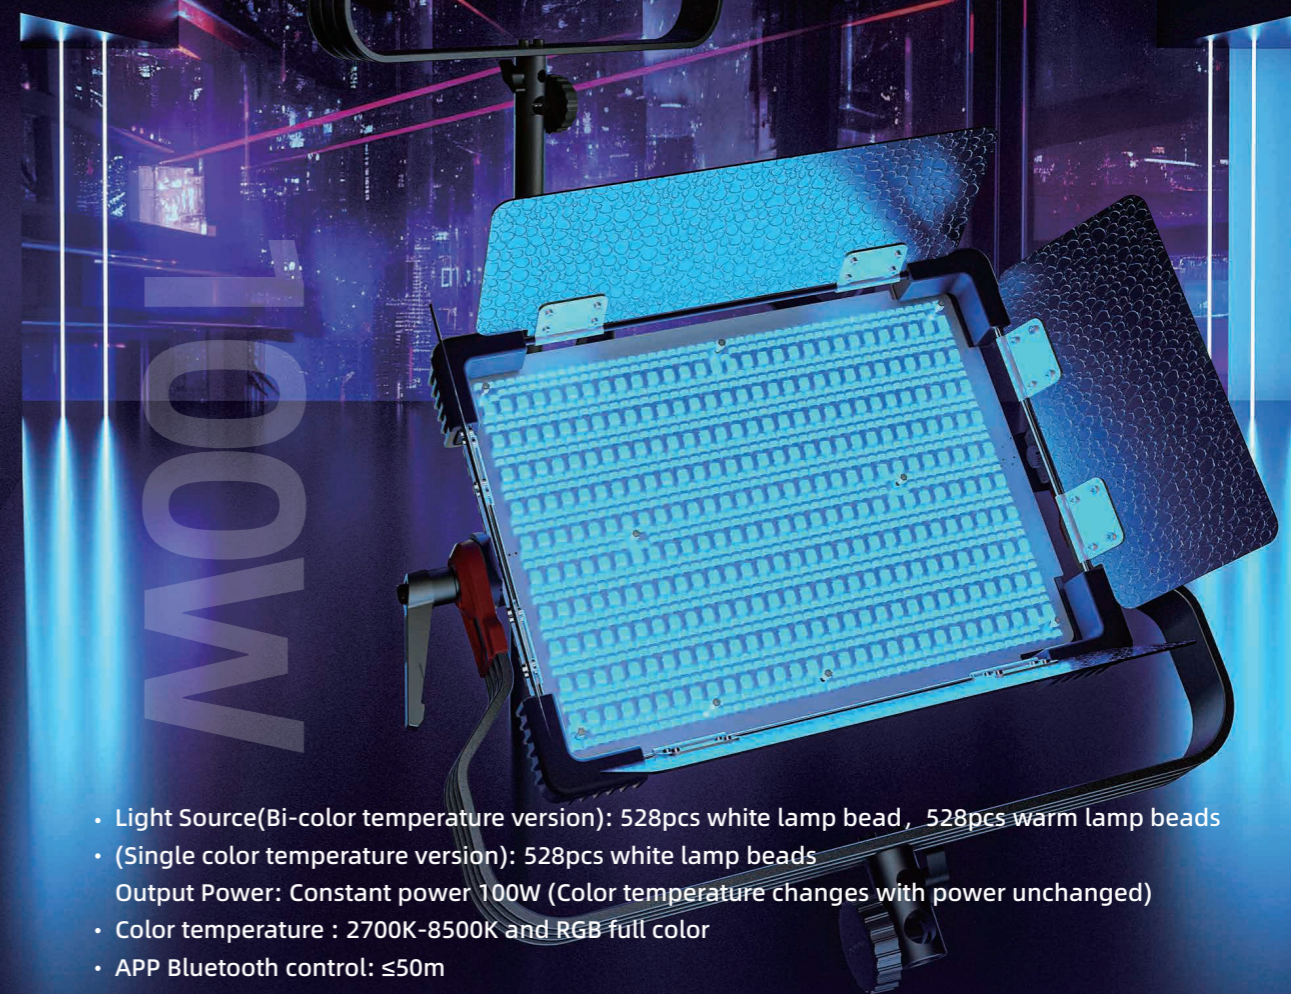

- Light Source(Bi-color temperature version): 528pcs white lamp bead, 528pcs warm lamp beads
- (Single color temperature version): 528pcs white lamp beads
- Output Power: Constant power 100W (Color temperature changes with power unchanged)
- Color temperature : 2700K-8500K and RGB full color
- APP Bluetooth control: \leq 50m
- 2.4G wireless control: \leq 100m
- external power supply① : DC19V \approx 6.31A, Interface size, ϕ 5.5*2.1mm
- external power supply②: TYPE-C interface, in accordance with PD agreement
- external battery ① : 4 pcs NP-F series batteries
- external battery ② : V mount battery
- Product Net Size: 43.5*6.6*40.5cm

YN60 RGB II 6W LED Video Light



- ✓ 25 Various Special Modes
- ✓ 1/4 nut interface hole x1

- Number of lamp beads: 68 pcs
(24 warm-white lamp beads+24 Cold-white lamp beads+20 RGB lamp beads)
- Output Power: 6W
- Color Temperature: 2500~9900K(±100K) and RGB full color
- Built-in Lithium Battery: 2000mAh
- Color rendering index (CRI): 95+ TLCL: 97+
- RGB hue (HSI): adjustable full color 0-360° hue, brightness 0-100% adjustable, the light will be off at 0%
- Dimension: 66*66*19.6mm
- Charging interface: Type-C, support 5V==2.1A (about 1 hour to fully charge)
- Weight: Approx.88g



- ✓ 31 Various Special Modes

YN120 RGB 8W RGB LED Video Light

- Number of lamp beads: 120 pcs
(42 Warm-white lamp beads+42 Cold-white lamp beads+36 RGB lamp beads)
- Output Power: approx.8W
- Color Temperature: 2500~9900K(±100K) and RGB full color
- Built-in Lithium Battery: 3000mAh
- Fixed interface: 1/4 nut interface hole x2
- Dimension: 16*108*66mm
- Charging Power: 5V==2A (About 2.5 hours to fully charge)
- Weight: approx.121g

YN216II

24W Portable Professional LED Video Light

- Model: YN216 II
- Light Source: 332 pcs LED lamp beads
- Output Power: 24W
- Color Temperature: White:5600K, bi-color:2700K-8000K
- External Battery: 1pc NP-F series battery for power supply or 8pcs AA batteries(need to be purchased additionally)
- External Power: DC 12V == 2A, interface size $\phi 5.5 \times 2.1\text{mm}$
- The size of the light: 16.5*14*16.5cm
- Bluetooth Remote Control: $\leq 50\text{m}$
- Illuminance Angle: 55°
- 2.4G Wireless Control: $\leq 100\text{m}$
- Average Lifespan: 50000H

Illuminance Value

Color Temperature:	2700K	3200K	4400K	5600K	6500K
Single Light(1M)	1705Lux	2130Lux	2910Lux	2630Lux	2265Lux

YONGNUO

YN300IV

24W RGB LED Video Light

Color Temperature: 5600K and RGB or 3200K~5600K and RGB

Color Rendering Index: ≥ 95

Remote Distance: $\leq 15\text{m}$

Power: 24W

Luminance Angle: 55° and 110°

Compatible Batteries: NP-F series lithium battery*1

External DC Power Supply: DC12V==2A

USB Type-C

Dimension: 255*230*97mm

Charging Power: 18W

Weight: about 920g

100% illumination	Distance	0.3M	0.5M	1M
	lamp beads	17620Lux	8730Lux	2830Lux
	RGB	6310Lux	2610Lux	685Lux







*The above tests are average values, the brightness of different lamps might be slightly different.

30 + VARIOUS SPECIAL MODES

YN300 Air II 18W LED Light



- Light Source: 108 pcs SMD LEDs and 100 pcs RGB lamp beads
- Luminance Angle: 110°
- Output Power: 18W
- CRI: ≥ 95
- Color Temperature: 3200K-5600K and RGB full color
- Average Service Life: 50000h
- Remote Distance: $\leq 15\text{m}$
- Lumen: Bi-color:2268LM; RGB:1235LM
- Dimension: 216*187*52mm
- Power Supply: 12V2A DC power or NP-F series lithium battery*1
- Weight: about 530g

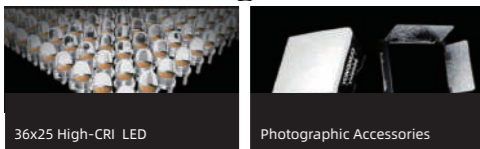

YN9000



65W LED Video Light

Light Source: 900 pcs LED beads
 Luminance Angle: 55°
 Color Temperature: 3200K-5600K
 Input Power: 65W
 Color Rendering Index: ≥96
 Lumen: White color 7200 LM; Bi-color 6975LM
 Mobile Phone Remote Control Distance: ≤15m
 Average Service Life: 50000h
 Power Supply: 2*NP-F series lithium batteries or external 19V=5A DC power supply
 Weight: about 2700g

YN6000

50W LED Video Light

Light Source: 600 pcs LED beads
 Color Temperature: 3200K-5600K
 Color Rendering Index: ≥95
 Mobile Control: Bluetooth 4.0
 Average Service Life: 50000h
 Mobile Phone Remote Control Distance: ≤15m
 Lumen: White color 4800LM; Bi-color 4650LM
 Compatible Batteries: 2*NP-F series lithium batteries
 External Power Source: 12V=5A DC power supply
 Luminance Angle: 55°
 Remote Control: 2.4G
 Input Power: 50W
 Weight: about 2600g



MACRO RING FLASH

YN14EX C Macro Ring Flash



- Type: Automatic macro flash for close-up photography
- Guide No.: 14 (ISO 100, unit/meter)
- Flash Ratio Control: With the precision of 1/2 EV within the range of 8:1-1:1-1:8
- Flash Mode: TTL, M
- Power Supply: 4*AA alkaline battery or AA Ni-MH battery
- Lighting Times: 200-2500 times Recycle time: approx. 3s
- Color Temperature: 5600K
- Flash Control: 7 levels of output control(1/128-1/1), 19 levels of fine tuning
- External Interface: Hot shoe, PC port, Charging port
- Flash Unit Dimension: 153*123*26mm
- Control Unit Dimension: 153*74*56mm
- Net Weight: about 420g

YN14EX II C/S Macro Ring Flash



- Type: Automatic macro flash for close-up photography
- Guide No.: 18 (ISO100, unit/meter)
- Flash Ratio Control: With the precision of 1/2 EV within the range of 8:1-1:1-1:8
- Flash Mode: TTL, M
- Power Supply: 4*AA alkaline battery or AA Ni-MH battery
- Lighting Times: 200-2500 times Recycle time: approx. 3s
- Color Temperature: 5600K
- Flash Control: 8 levels of output control(1/128-1/1), 22 levels of fine tuning
- External Interface: Hot shoe, PC port, Charging port
- Flash Unit Dimension: 135*123*26mm
- Control Unit Dimension: 175*105*160mm
- Net Weight: about 920g

YN24EX C/S Macro Ring Flash



- Flash Ratio Control: With the precision of 1/2 EV within the range of 8:1-1:1-1:8.
- Guide No.: Two flash heads: 24/64.3
 Single flash head: 16/45.5 (ISO 100, unit/meter or feet)
- Flash Mode: TTL, M
- Color Temperature: 5600K
- External Interface: Hot shoe, PC port and external charging port
- Flash Control: 8 levels of output control(1/128-1/1), 22 levels of fine tuning
- Flash Unit Dimension: 251*49*107mm
- Control Unit Volume: 175*105*160mm
- Net Weight: about 998g

FLASH AND FLASH TRIGGER SERIES

YN730 Lithium Battery Speedlite



Specification SPEEDLITE>>

Color Temperature:	about 5600K
Guide Number:	60 (ISO 100,200mm)
Flash Modes:	M, Multi
Trigger Modes:	set-top mode, radio wireless master mode, radio wireless slave mode, wireless optical slave mode
Lamp Head Zoom Range:	20,24,28,35,50,70,80,105,135,200mm
Horizontal Rotation Angle:	180 degrees for each
Power Supply:	LB-E1 Li-ion battery*1
Flash Time:	about 1 second
Radio Transmission Triggering Distance:	up to 100m
Volume:	Approx 64x78x210mm (extended state)
Net Weight:	about 417g

YN685EX-RF For S



Specification SPEEDLITE>>

Color Temperature:	about 5600K
Guide Number:	60 (ISO 100, 200mm)
Flash Modes:	TTL,M,Multi,Gr
Trigger Modes:	set-top, radio master,radio slave, wireless optical slave (Ss,S1,S2)
Lamp Head Zoom Range:	20,24,28,35,50,70,105,135,200mm
Horizontal Rotation Angle:	180 degrees
Power Supply:	4*AA alkaline batteries or AA nickel-metalhydride (Ni-MH) batteries
Flash Time:	about 2 seconds
Radio Transmission Triggering Distance:	up to 100m
Volume:	about 65x78x210mm (stretched state)
Net Weight:	about 427g

YN690EX-RT For C



Specification SPEEDLITE>>

Color Temperature:	about 5600K
Guide Number:	60 (ISO 100, 200mm)
Flash Modes:	TTL,M,Multi,Gr
Trigger Modes:	set-top, radio master,radio slave, wireless optical slave (Ss,S1,S2)
Lamp Head Zoom Range:	20,24,28,35,50,70,105,135,200mm
Horizontal Rotation Angle:	180 degrees each side
Power Supply:	LB-E1 li-ion battery *1
Flash Time:	about 1 second
Radio Transmission Triggering Distance:	up to 100m
Volume:	about 64x80x205mm (stretched state)
Net Weight:	about 447g



1-200s
1-20000s
Flash times

5500k
LED color temperature

300lux 1m
LED luminance

100-1500 times
Lighting times

YN968N II For N

Guide No.: 60 (ISO 100,200mm)
Flash mode: TTL, M, Multi, Gr
Zoom: Auto, 20,24,28,35,50,80,105,200mm
Power Supply: 4xAA size batteries (Alkaline or Ni-MH available)
Lighting Times: 100~1500 times (AA alkaline cell used)
LED Color Temperature: approx. 5600K
LED Luminance: approx. 300lux(1m)
Dimensions: 78*60.5*214mm (extended state)
Net Weight: about 445g

YN968EX-RT For C

Guide No.: 60 (ISO 100,105mm)
Flash Mode: TTL, M, Multi,Gr
Zoom: Auto,20,24,28,35,50,80,105mm
Power Supply: 4xAA size batteries (Alkaline or Ni-MH available)
Lighting Times: 100~1500 times (AA alkaline cell used)
LED Color Temperature: approx. 5600K
LED Luminance: approx. 300lux(1m)
Dimensions: 78*60.5*206mm (extended state)
Net Weight: about 435g

YN32-TX For S

Specification: Wireless Flash Trigger

10,000 IDs 16 channels

TTL/M/Multi/Gr
flash mode

2.4GHz



- Radio Transmission: 2.4GHz
- Compatible Flash Trigger System: YONGNUO RF Radio Trigger System (RF602/603)
- Power Supply Mode: Built-in lithium battery (3.7V/350mAh)
- Flash Mode: Front-curtain sync / rear-curtain sync /high-speed sync
- Slave Unit Control: Up to 5 groups (A/B/C/D/E)
- Transmission Range: Approx.60m
- Channel: 1~16
- ID Setting: 10000 (0000~9999)
- Remote Parameter Control: LCD Display Screen: TFT-LCD
- Flash mode, flash output, focal length
- USB Interface: Type-C
- Charging: USB Type-C
- Dimension: Approx.55*58*39mm
- Net Weight: Approx.68g

RF flash trigger system

RF flash trigger system

The RF flash trigger system is developed by YONGNUO. It is a high-performance 2.4G wireless flash trigger system which is compatible with YONGNUO RF602 and RF603 flash trigger signal.

Advantages of RF radio trigger system:

01


Wide compatibility:

It is fully compatible with YONGNUO YN685EX-RF, YN650EX-RF,YN320EX, YN685(II), YN560 IV, YN660, YN560 III, YN560Li, YN720,YN862Li, YN200, YN32-TX, YN560TX(pro), RF603(II) , RF602 and other models' radio trigger signal.

03

Supports multi-group flash independent control:

When used as a radio master control unit, it has 5 groups of independent control functions, which can remotely control the flash mode, flash output, and focal length of the slave unit.

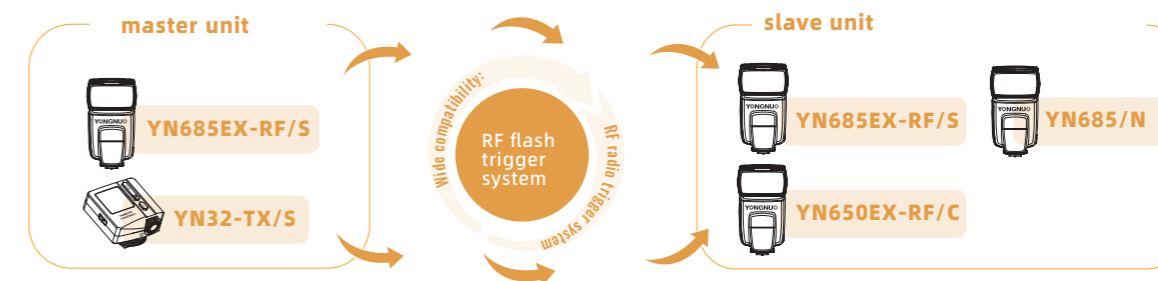

YN560-TX PRO C/N/S

Specification: Flash Transmitter




- Type: 2.4G On-camera Speedlite transmitter
- Exposure control system: E-TTL II/E-TTL Autoflash, Manual flash, Multi flash, Gr flash
- Channel: Ch1 - 16
- ID: 0000-9999
- Slave Unit control: Up to 5 groups (A/B/C/D/E)
- Transmission Distance: about 100 m
- Flash Ratio Control: 1:8 - 1:1 - 8:1, 1/2-stop increments Flash exposure
- FEC: ±3 stops in 1/3-increments
- High-speed Sync: Provided
- Manual Flash: 1/1 - 1/128 power (1/3-stop increments)
- Stroboscopic Flash: Provided (1 - 500 Hz)
- AF Assist Beam Emitter: Provided
- Firmware Update: Provided
- Power Source: 2 AA/LR6 alkaline batteries Ni-MH batteries
- Dimensions: about 67.7* 66.7* 81.3mm
- Weight: about 110g (transmitter only, excluding batteries)

02

Cross-brand camera, reuse of old flash models

In wireless flash photography with built-in RF wireless module products, you only need to ensure that the hot shoe mount of the master unit (flash or transmitter) matches the camera, when the flash used as slave unit, there is no special requirement for the hot shoe mount.

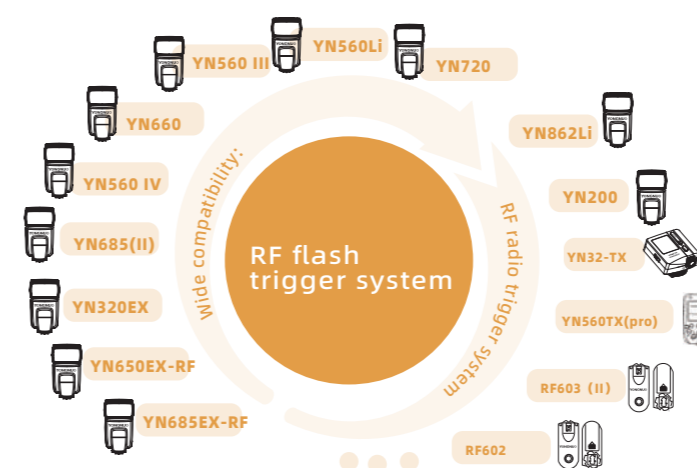

04

For example:

A photographer who uses Nikon camera at the beginning, then he switched to use Canon camera, then uses Sony mirrorless camera now. During the time, he purchased YN685N for Nikon, YN650EX-RF/C for Canon, YN685EX-RF/S and YN32-TX/S for Sony, he only needs to install YN685EX-RF/S or YN32-TX/S on the Sony camera as the master unit, uses YN685EX-RF/S, YN685/N, YN650EX-RF/C as the slave unit to easily achieve wireless flash shooting.

Stable signal, multi-channel optional:

supports 2.4G ultra-long-distance wireless flash, the triggering distance can reach about 100 meters; 16 channels are available for selection, and in public places it can be used normally even with obstacles.

YONGNUO Official Stores

YONGNUO Official Store



European Amazon

 YONGNUO Amazon Italy HK YONGNUO LIMITED Italy https://www.amazon.it/sp?seller=AK6PH8XFDVYTT	 YONGNUO Amazon Spain HK YONGNUO LIMITED Spain https://www.amazon.es/sp?seller=AK6PH8XFDVYTT	 YONGNUO Amazon France HK YONGNUO LIMITED France https://www.amazon.fr/sp?seller=AK6PH8XFDVYTT	 YONGNUO Amazon UK HK YONGNUO LIMITED UK https://www.amazon.co.uk/sp?seller=AK6PH8XFDVYTT	 YONGNUO Amazon DE HK YONGNUO LIMITED Germany https://www.amazon.de/sp?seller=AK6PH8XFDVYTT
--	--	--	--	---

Official Website

<https://th.hkyongnuo.com>

YONGNUO is a global famous brand of photographic equipment. YONGNUO Store provides HIGH-QUALITY & VERY COST-EFFECTIVE photographic equipment, including smart cameras, lenses, LED video lights, flashes, flash triggers, tripods, microphones, batteries and other photographic accessories.

Aliexpress

 YONGNUO Official Store
 YongNuo Official Store
www.aliexpress.com/store/5260308

Lazada Malaysia

 YONGNUO Official Store
 Yong Nuo Official Store
https://www.lazada.com.my/shop/yong-nuo-official-store/?spm=a2o4k.pdp_yewang_ueller.1.23967408V9v9MMainMid.372427408v9MchameI5v9v9v9pdp

UAE Amazon

 YONGNUO(AE)
 YONGNUO
<https://www.amazon.ae/stores/YONGNUO/page/E16E5FF1-8AAA-474C-8E17-1476A048DF34>

US Amazon

 YONGNUO
<https://www.amazon.com/yongnuo>

Aliexpress

 YONGNUO GZ Online Store
<https://yongnuogzofficial.aliexpress.com>

Lazada Singapore

 YONGNUO Official Store
 Yong Nuo Official Store
<https://www.lazada.sg/shop/yong-nuo-official-store?path=index.html&lang=en&pageType=1>

JP Amazon

 HK YONGNUO
<https://www.amazon.co.jp/sp?seller=A1ZCDBRZPYHG6D>

US Amazon

 gzphoto
<https://www.amazon.com/s?me=A1TDFDU63R7MRQ&marketplaceID=ATVPDKIKXODER>

Russia OZON

 YONGNUO Official Store
https://www.ozon.ru/seller/yongnuo-official-store-1017675/products?miniapp=seller_1017675

Lazada Philippines

 YONGNUO Official Store
 Yong Nuo Official Store
<https://www.lazada.com.ph/shop/yong-nuo-official-store?path=index.html&lang=en&pageType=1>

US Amazon

 YNLENS
<https://www.amazon.com/ynlens>

US Amazon

 YONGNUO store
<https://www.amazon.com/s?me=A1K7PEXJD2ET1B&marketplaceID=ATVPDKIKXODER>

Shenzhen main store:

No.3008 Huaqiang North Road, Futian District, Shenzhen,China

TEL: 0755-8376 2448

Shenzhen branch store:

4A25, 4th Floor, Xiandaizhichuang , Huaqiang North Road, Futian District,Shenzhen,China

TEL: 135 1061 4930

Guangzhou branch store:

No.C2-02 Shengxian Photographic Equipment Plaza, Erma Road, Dashatou , Yuexiu District, Guangzhou, China

TEL: 020-8382 7743

Beijing branch store:

B15A, 1st Floor, Wukesong Photographic Equipment City, Haidian District, Beijing, China

TEL: 180 2533 1469

Shanghai branch store:

No. 501, 5th Floor, Xingguang Photography City, No.300 Luban Road, Huangpu District, Shanghai, China

TEL: 136 6227 7702

Hangzhou branch store:

2006, Second Floor, Equipment Zone, Provincial Home Appliance Market, No. 249, Tanhua'an Road, Jianggan District, Hangzhou City, Zhejiang Province, China

TEL: 138 5805 6313

Hongkong branch store:

Flat 44, 8/F, Nan Fung Centre, 264-298 Castle Peak Road, Tsuen Wan, New Territories, Hong Kong, China

TEL: 852-2330 3763