

# Cub Cadet®

**ENDURO SERIES®**

**FORCE SERIES**

**PRO SERIES**

## WARRANTY

Cub Cadet offers a three year domestic user warranty across the entire range of garden machinery, plus a free 1 year extended warranty for all XR5 robotic mowers. This is great news for both customers and dealers, inspiring confidence in the quality and reliability of Cub Cadet products. Details of terms and conditions can be found at [www.cubcadet.co.uk](http://www.cubcadet.co.uk).

3 year warranty for all garden machinery



3 year warranty plus free 1 year extended warranty for XR5 robotic mowers



The extended warranty PLUS is the best protection for your Cub Cadet XR5 and it's free. Just register your device on the website within 3 months of purchase and enjoy a 4th year of warranty for free. Plus additional protection against damage and loss. If during the 4 years a failure occurs in your registered XR5 and it is covered by the warranty conditions then the unit will be repaired with no cost to you, for TOTAL peace of mind. For full details go to [cubcadet.co.uk](http://cubcadet.co.uk)



Doc.No: 4688

Text and photographs, specifications of dimensions and performance are composed with greatest care. The correctness of the information cannot be guaranteed, especially it is not guaranteed that the products comply with the images regarding colour, form and equipment or that the products comply with the proportion of the images. The engine horsepower information provided by the engine manufacturer is to be used for comparison purposes only. Amendments due to misprints or errors are reserved. Please see the operator's manual and the warning labels posted on the vehicle itself for more details.

© 2022 Stanley Black & Decker Outdoor GmbH, Germany. All rights reserved. Cub Cadet and other trademarks are registered trademarks of Stanley Black & Decker. For more information, simply go to our website: [www.cubcadet.co.uk](http://www.cubcadet.co.uk)


Some models may not be available due to worldwide component shortage issues. Ask your local dealer for more information.



Cub Cadet Supported by Barrus  
E. P. Barrus Ltd, Glen Way, Launton Road, Bicester, Oxfordshire. OX26 4UR  
Tel: 01869 363658 Fax: 08714 290936 [www.cubcadet.co.uk](http://www.cubcadet.co.uk)

**BARRUS**

The Power Behind The Brands

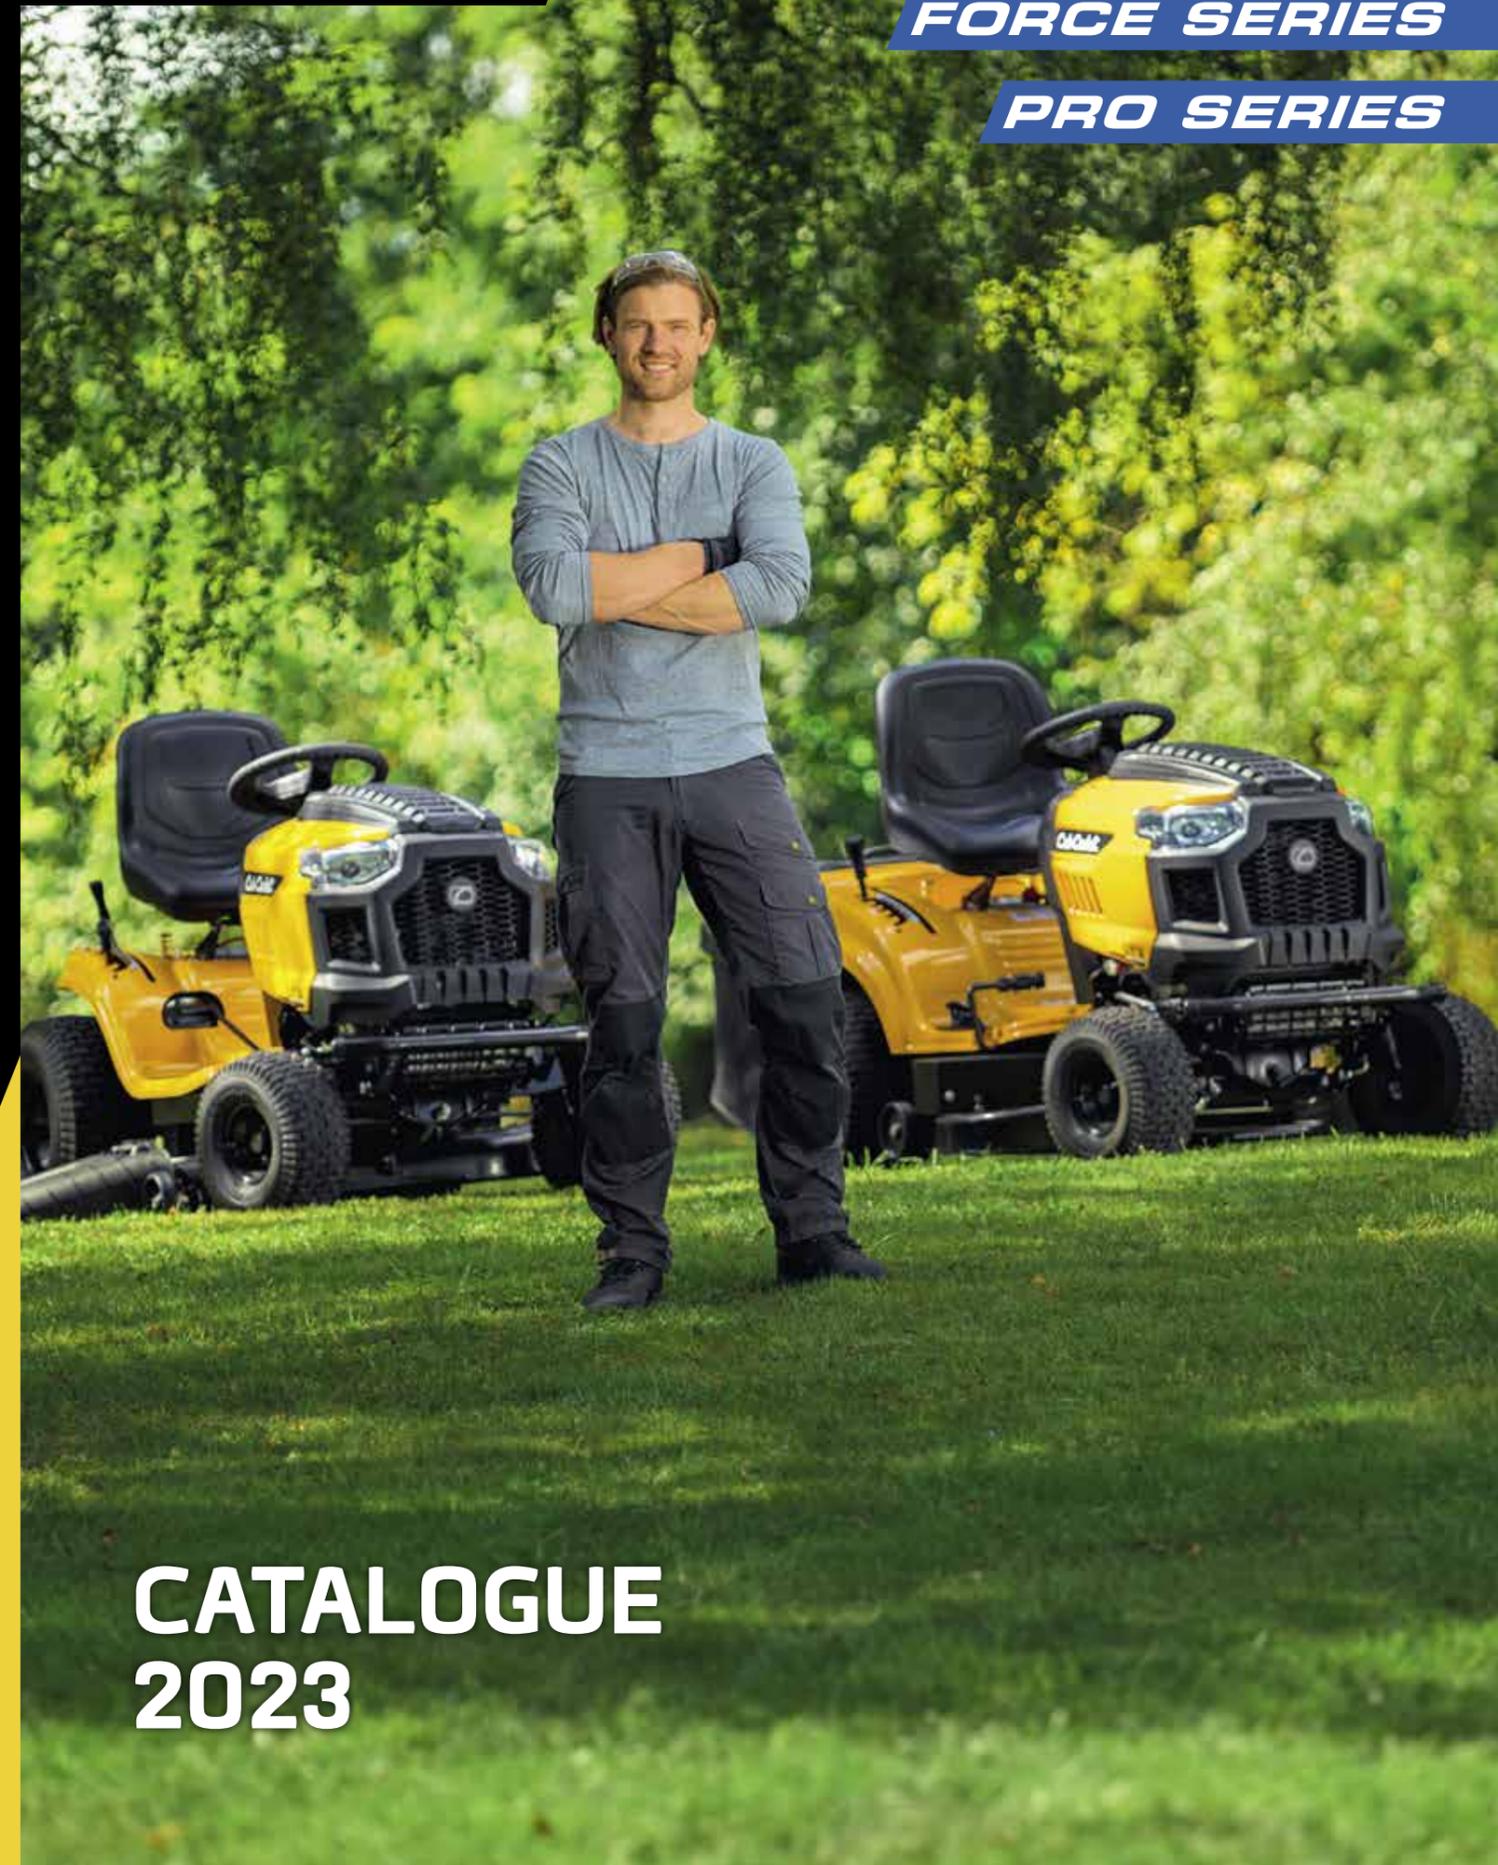

# CATALOGUE 2023

# MORE POWER TO YOU

# CHAMPIONS – INSPIRED BY AMERICAN INGENUITY

We know what our customers expect from their gardening equipment; power, performance, endurance and durability. That's why we strive for every Cub Cadet product to be the best in class.

We continuously endeavour to further improve our product ranges, by incorporating new and proven technologies, implementing innovative engineering solutions and offering service solutions and accessory ranges that deliver true advantages.

With constantly higher quality standards and power, we ensure you get the ultimate user experience. Power you can rely on again and again.

**"OUR CUSTOMERS GIVE US EXCELLENT FEEDBACK ON CUB CADET MACHINES. WE ARE TRULY PROUD TO HAVE BEEN A TRADING PARTNER OF THIS GREAT BRAND HERE IN THE SOUTH OF ENGLAND SINCE 1985."**

STEVE CANN & JILL VICKERY  
CUB CADET DEALER | GEORGE CANN GARDEN MACHINERY LTD. | BRAMDEAN | UNITED KINGDOM



Is it the power? The endurance? Or simply the fact, that you are ready for every challenge? There are many things that make Cub Cadet a true champion - and they all have one thing in common; a revolutionary garden tractor introduced to the US in the 1960s.

Back then a true milestone, and to this day a historic benchmark with regards to our standards and values; we continuously strive to exceed the high demands of our customers. With a mix of innovative engineering and user-friendly design, we want to inspire professionals, semi-professionals and ambitious outdoor enthusiasts alike. By creating innovative machines that are built for maximum efficiency, ease-of-use and maximum comfort.

That is what makes us proud - and turns you into a true champion.

Cub Cadet is also proud to be a long-standing sponsor of William Fox-Pitt MBE, one of the most successful three-day event riders ever, who uses the Cub Cadet range to keep his Dorset yard well groomed. Fox-Pitt has been world number one four times and is eleven-times British number one.

Cub Cadet



## OUR HISTORY KEEPS US GOING

1961 1 <sup>st</sup> Cub Cadet garden tractor hits the market	1963 1 <sup>st</sup> shaft drive model	1980 1 <sup>st</sup> super garden tractor	1980 1 <sup>st</sup> twin cylinder engine	2007 Synchro-Steer® Technology debuts, an Industry first	2011 50th anniversary celebration with innovation	2014 Introduction of the innovative Boosted-Airflow-Technology	2017 Introduction of the PRO SERIES – zero-turns	2018 Introduction of the XR ENDURO SERIES robotic mowers	2020 Introduction of the XZ5 zero-turn series	2021 Introduction of the XR5 robotic mowers	2022 Introduction of the XZ6 zero-turn series	
1966 The world's 1 <sup>st</sup> garden tractor with hydrostatic transmission	1972 "Cadet" lawn tractor debuts	1985 Breaking new ground in cut quality	1994 1 <sup>st</sup> lawn tractor with shaft drive	2005 500 Series lawn tractors – Made in Germany	2009 Industry's tightest turning radius	2010 Most advanced residential zero-turn	2015 MySpeed – The innovative variable speed system	2017 Introduction of the XT ENDURO SERIES lawn tractors	2020 Introduction of LR2 E-rider and XT2 E-lawn tractor	2021 Introduction of the XZ7 zero-turn series	2021 Introduction of the PRO Z9 zero-turn	2023 Introduction of the XZ8

## OUR CUB CADET HIGHLIGHTS FOR 2023

Once again this year, you can expect great new machines in the Cub Cadet range as well as innovative enhancements to existing product series.

In 2023, the new electric Zero-Turn XZ5 EL107 will join the family of our battery-powered workhorses. This means that in future you will also be able to work with our most manoeuvrable series in operation without emissions and mow even large areas quietly and with the power you expect from Cub Cadet.

Read more on page 89.

**NEW**



# XZ5

ENDURO SERIES®

**ELECTRIC**  
LITHIUM ION



**NEW**

# XZ8

ENDURO SERIES®

Our new ULTIMA-Zero-Turns, the XZ8 S122 and XZ8 S137i are built with Synchro Steer® Technology for handling hilly terrains and a robust steel frame for challenging terrain.

Read more on page 95.

**StanleyBlack&Decker**

### LAST BUT NOT LEAST:

Cub Cadet has been part of the large, globally active Stanley Black & Decker family since 2022. With established brands, even more opportunities for joint growth and a strong partnership – now and in the future.



# LT

FORCE SERIES

The petrol-powered LT tractor series has been given a modern design and now comes with new technical features.

Read more on page 54.



# XR5

ENDURO SERIES®

For those who don't want to mow themselves, we recommend the XR5 series robotic mowers. They care for lawns of up to 4,000 m<sup>2</sup> and, with their sophisticated technical equipment, do not shy away from even the most demanding terrains.

Read more on page 7.

THE CUB CADET PRODUCT SERIES FOR 2023

# EXCEED YOUR EXPECTATIONS

At Cub Cadet we are continually improving our product to meet the expectations and requirements of our customers.

Our FORCE SERIES models are suited to ambitious gardeners, the ENDURO SERIES™ fit the bill for expert users and our PRO SERIES is ideal for professionals.

These categories are designed to help you find the perfect machine for your needs.



## ROBOTIC MOWERS

1

7  
14

XR Robotic Mowers  
Robotic Mower Accessories



## LAWNMOWERS

2

17  
31

LM Lawnmowers & Lawn Trimmer  
XM Lawnmowers



## MINI-RIDERS

3

41  
46

LR Mini-Riders  
Mini-Rider Accessories



## LAWN TRACTORS

4

53  
61  
81

LT Lawn Tractors  
XT Lawn Tractors  
Lawn Tractor Accessories



## ZERO-TURNS

5

83  
100

XZ Zero-Turns  
XZ Accessories



## PROFESSIONAL ZERO-TURNS

6

101  
117

PRO Zero-Turns  
PRO Accessories



**XR**  
**ENDURO SERIES™**

**POWERFUL  
PERFORMANCE  
FOR FASTER  
MOWING**

With our XR ENDURO SERIES™ Cub Cadet presents robotic mowers that raise the bar for automated lawn mowing.

Thanks to their stronger mowing systems compared to similar models, the XR mowing robots mow up to 10 % faster, so you can spend more leisure time in your garden.

Whichever XR robotic mower you choose, the same end result is guaranteed: a perfectly trimmed lawn in next to no time. All of which meet a wealth of power and performance needs.

## THE GARDENING ASSISTANT YOU'VE BEEN LOOKING FOR

THE XR5 IS DEVELOPED TO DELIVER QUALITY TIME AND TIME AGAIN, TO GIVE YOUR LAWN THAT FLUFFY LOOK.



The XR5 has been developed to cut your lawn so that your neighbour will think you have cut it yourself. The high quality steel blades cut your grass for health and thickness so you get a luscious lawn with the time back to actually enjoy it.



### 1. BEAUTIFULLY FINISHED EDGES

Cutting beyond the edge of the wheel, the XR5 gives you a finish to be proud of, even on uneven surfaces.



### 2. HANDLES THICK GRASS AND UNEVEN TERRAIN

The XR5 is designed to handle uneven terrain and keep the lawn freshly cut and good looking.



### 3. EASY TO USE

From our easy to use interface and other features, including the charging station, Cub Cadet makes the XR5 quick and easy to install.




### 4. EASY TO MAINTAIN

XR5 has been developed to self-clean, giving you more time in the garden. For complete peace of mind, you should arrange an annual maintenance service with your dealer.




1  
ROBOTIC MOWERS

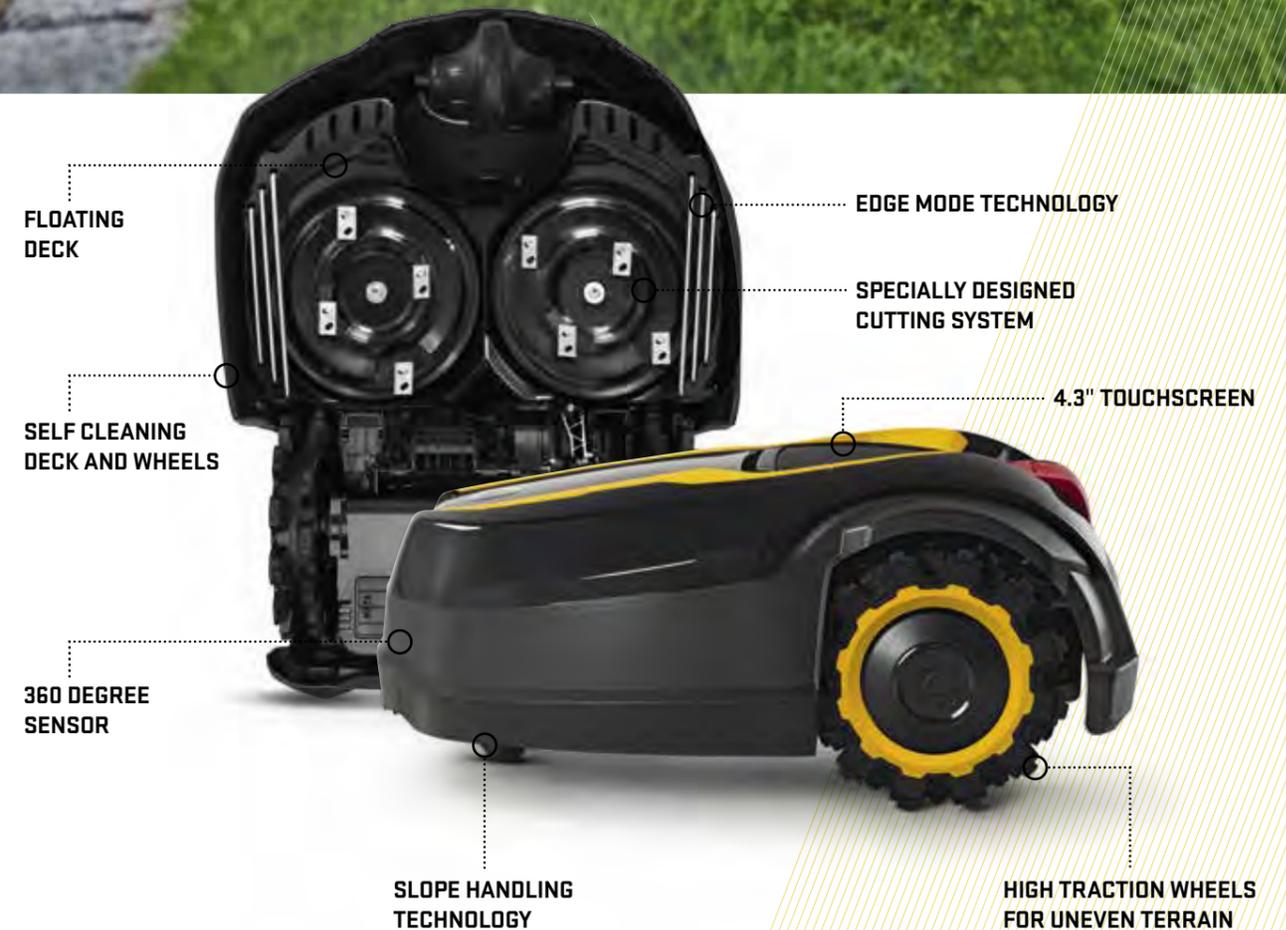

# THE XR5 COMES WITH UPGRADED FEATURES

From its floating deck and superior slope handling, to its self cleaning and replaceable parts, the XR5 series are packed with features to make getting the perfect lawn as easy and efficient as possible.

## XR5 ENDURO SERIES™

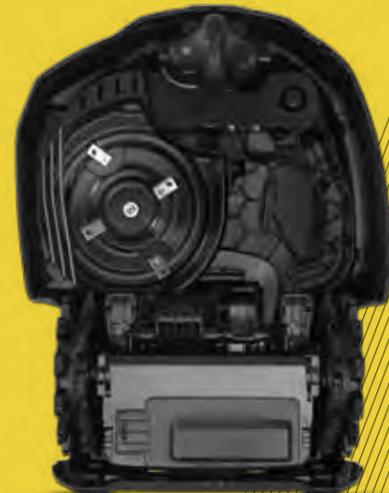

XR5 1000	
Cutting width:	21 cm / 8"
Cutting height:	20-100 mm
Area performance (rec.):	up to 1,000 m <sup>2</sup> *
Mowing time:	40-50 min
Motor:	DC Brushless
Electricity consumption:	4.0 kWh/Month

XR5 2000	
Cutting width:	21 cm / 8"
Cutting height:	20-100 mm
Area performance (rec.):	up to 2,000 m <sup>2</sup> *
Mowing time:	80-90 min
Motor:	DC Brushless
Electricity consumption:	7.3 kWh/Month



**NEW**




XR5 3000	
Cutting width:	42cm / 16"
Cutting height:	20-100 mm
Lawn area (rec.):	Up to 3,000 m <sup>2</sup> *
Mowing time:	80-90 min
Engine:	DC Brushless
Power consumption:	8.7 kWh/month

XR5 4000	
Cutting width:	42cm / 16"
Cutting height:	20-100 mm
Lawn area (rec.):	Up to 4,000 m <sup>2</sup> *
Mowing time:	110-120 min
Engine:	DC Brushless
Power consumption:	11.5 kWh/month

DOUBLE DECK WITH 42 CM CUTTING WIDTH



\*Max. mowing area under ideal mowing conditions: flat level lawn, simple rectangular shape, no obstacles, no additional zones, and modest lawn growth.



**1. FLOATING DECK**  
A floating deck cuts uneven lawns flawlessly on any terrain, guaranteeing an excellent cut every time for even the most unusual landscapes.




**2. SLOPE HANDLING**  
45% slope handling performance makes light work of the most challenging lawn setups.



**3. 100 MM CUTTING HEIGHT**  
Tall, thick grass is not a problem with a 100 mm maximum cutting height.



**4. PATENTED ALL TERRAIN WHEELS**  
Whatever your lawn surface looks like, the patented high traction, all-terrain wheels can navigate it smoothly and efficiently.



**5. LOW NOISE**  
No more waiting for a sunny afternoon to tackle the lawn. Thanks to its drive motor, the XR5 is so quiet it could mow at night.



**6. SELF-CLEANING**  
Self cleaning deck and wheels, making maintenance a breeze.



**7. 4.3" TOUCHSCREEN**  
Set your mower to the exact setting you want with an easy-to-use 4.3" LCD touchscreen.



**8. EDGE MODE TECHNOLOGY**  
The XR5's unique edging ability mows beyond the wheel to deliver a precise finish every time.



**9. PATENTED CUTTING SYSTEM**  
Thanks to its patented cutting system you will achieve a great cut.



**10. 360 DEGREE SENSOR**  
The XR5's omni-directional obstruction sensor ensures that it can navigate its way around any obstacle (please make sure that there are no children or pets on the lawn while mowing).

**3 YEARS\***  
Cub Cadet  
WARRANTY

**FREE 1-YEAR EXTENDED WARRANTY**  
available  
For more information visit [www.cubcadet.co.uk](http://www.cubcadet.co.uk)


Images partly show previous year's models

The extended warranty PLUS is the best protection for your Cub Cadet XR5 and it's free. Just register your device on the website within 3 months of purchase and enjoy a 4th year of warranty for free. Plus additional protection against damage and loss. If during the 4 years a failure occurs in your registered XR5 and it is covered by the warranty conditions then the unit will be repaired with no cost to you, for TOTAL peace of mind. For full details go to [cubcadet.co.uk](http://cubcadet.co.uk)

\* Manufacturer's warranty from Stanley Black & Decker Outdoor GmbH, limited to supplementary performance and according to the warranty conditions [available at [www.cubcadet.co.uk](http://www.cubcadet.co.uk)].

# COMPLETE CONTROL VIA SMARTPHONE

The App allows the robotic mowers in the XR ENDURO SERIES to be controlled and programmed conveniently using your smartphone. Equipped with a supporting industry standard for optimal connectivity. Simply download the app, install it on your phone and get mowing.

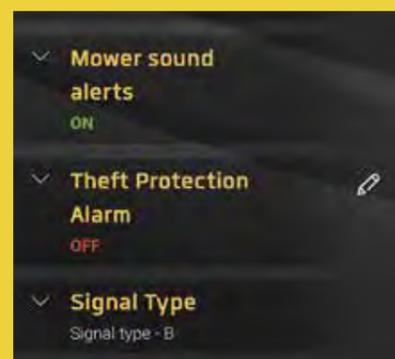

### CONTROL

- Set mowing schedule
- Manage multiple zones
- Send to mow
- Return to base
- Manual drive
- Theft protection

### INFO

- Mowing history
- Mowed area
- Departure times
- Remaining mowing time

### ADVANCED

- Operational alerts\*
- GEO-FENCE - Trace your mower in case of theft

\*Subject to your approval

# ROBOTIC MOWER ACCESSORIES

PERIMETER SETTING			
	Perimeter wire (100 metres on spool)	Mod. no: MRK0040A	
	Perimeter wire (200 metres on spool)	Mod. no: MRK0060A	
	Perimeter wire (650 metres on spool)	Mod. no.: MRK0067B	
	Installation Kit small (for max. 400 m <sup>2</sup> ) 100 m wire, 150 pegs	Mod. no.: 122-001-603	
	Installation Kit medium (for max. 1.200 m <sup>2</sup> ) 150 m wire, 200 pegs	Mod. no.: 122-002-603	
	Installation Kit large (for max. 2.500 m <sup>2</sup> ) 250 m wire, 350 pegs	Mod. no.: 122-003-603	
REPLACEMENT BLADES			
	Blade kit XR5 models	Mod. no.: 122-105-603	
COVERS			
	RoboHome for XR5 models	Mod. no.: 122-085-603	
ADDITIONAL ACCESSORIES			
Pegs 50 pcs	Part number: MRK7101A	Repair connectors 10pcs	Part number: MRK0039A1



## XR5 1000

## XR5 2000

BATTERY		
Engine	DC Brushless	DC Brushless
Battery	18.15V Li-Ion	18.15V Li-Ion
Mowing time	40–50 min	80–90 min
Charging time	60–120 min	60–120 min
Power consumption	4.0 kWh/month	7.3 kWh/month
CUTTING SYSTEM		
Lawn area (rec.)	Up to 1,000 m <sup>2</sup> *	Up to 2,000 m <sup>2</sup> *
Cutting width	21 cm / 8"	21 cm / 8"
Cutting height (min.–max.)	20–100 mm	20–100 mm
Blades	4 cutting blades	4 cutting blades
Spare blades	8	12
Mowing zones	1 main zone, 4 sub zones, separate zones	1 main zone, 4 sub zones, separate zones
Area coverage per hour	65 m <sup>2</sup> /h	65 m <sup>2</sup> /h
Maximum inclination	24° / 45 %	24° / 45 %
EQUIPMENT		
Base station	Included	Included
RoboHome	Optional (122-085-603)	Optional (122-085-603)
Display	4.3" HD coloured touch	4.3" HD coloured touch
App	Standard	Standard
Anti-theft	Standard	Standard
Bump-Sensor	360° detection	360° detection
Tilt-Sensor	Standard	Standard
Lift-Sensor	Standard	Standard
Edge mode	Standard	Standard
GSM module	Standard	Standard
Wheels	HIGH TRACTION patented wheels	HIGH TRACTION patented wheels
DIMENSIONS		
LpA/LwA/LwAg (dB)	50/61/64 dB(A)	50/61/64 dB(A)
Dimensions (L/W/H)	66.3 cm / 50.7 cm / 28.5 cm	66.3 cm / 50.7 cm / 28.5 cm
Weight	10.5 kg	10.5 kg

## XR5 3000

## XR5 4000

BATTERY		
Engine	DC Brushless	DC Brushless
Battery	18.15V Li-Ion	18.15V Li-Ion
Mowing time	80–90 min	110–120 min
Charging time	60–80 min	90–110 min
Power consumption	8.7 kWh/month	11.5 kWh/month
CUTTING SYSTEM		
Lawn area (rec.)	Up to 3,000 m <sup>2</sup> *	Up to 4,000 m <sup>2</sup> *
Cutting width	42 cm / 16.5"	42 cm / 16.5"
Cutting height (min.–max.)	20–100 mm	20–100 mm
Blades	2 x 4 cutting blades	2 x 4 cutting blades
Spare blades	16	24
Mowing zones	1 main zone, 4 sub zones, separate zones	1 main zone, 4 sub zones, separate zones
Area coverage per hour	135 m <sup>2</sup> /h	135 m <sup>2</sup> /h
Maximum inclination	24° / 45 %	24° / 45 %
EQUIPMENT		
Base station	Included	Included
RoboHome	Optional (122-085-603)	Optional (122-085-603)
Display	4.3" HD coloured touch	4.3" HD coloured touch
App	Standard	Standard
Anti-theft	Standard	Standard
Bump-Sensor	360° detection	360° detection
Tilt-Sensor	Standard	Standard
Lift-Sensor	Standard	Standard
Edge mode	Standard	Standard
GSM module	Standard	Standard
Wheels	HIGH TRACTION patented wheels	HIGH TRACTION patented wheels
DIMENSIONS		
LpA/LwA/LwAg (dB)	50/61/64 dB(A)	50/61/64 dB(A)
Dimensions (L/W/H)	66.3 cm / 53 cm / 28.5 cm	66.3 cm / 53 cm / 28.5 cm
Weight	12.2 kg	12.2 kg

\*Max. mowing area under ideal mowing conditions: flat level lawn, simple rectangular shape, no obstacles, no additional zones, and modest lawn growing pace.



# HARD WORKING. EASY TO USE.

## LAWN MOWERS

A lawnmower should be easy to use, hard-working and deliver flawless performance with features that boast incredible control, unmatched efficiency and user comfort. If you are looking to maintain a small, irregular shaped lawn, or even larger undulating grounds, there is a size and model to meet your needs.

All Cub Cadet lawnmowers are guaranteed to deliver the pristine Cub Cadet cut, mow after mow, season after season.

**LM1**  
FORCE SERIES

**3-in-1**  
**OPTION**


**COLLECT, DISCHARGE & OPTIONAL MULCHING**

3-in-1 option means that you have the choice between collecting the clippings, or discharging them out the back. You also have the option to buy an additional mulch kit as an accessory.

**LM1 – PERFECT CUT AND PERFECT COLLECTION**

The tough construction ensures a long life cycle and the Cub Cadet OHV engine delivers power and performance to meet and exceed your demands.

With the Cub Cadet LM1 lawnmower, you have the choice between collecting and discharging the clippings and lots of other useful features including easy-to-empty grass bag, ergonomically formed handle, convenient central height adjustment and ball bearing wheels. Mowing the lawn with an LM1 lawnmower is more pleasure, than a chore.

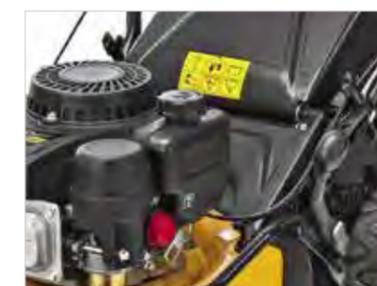

**MODEL AVAILABLE**



**KEY BENEFITS**

**LARGE GRASS BAG**

Reduces the amount of time emptying it, enabling quicker mowing and reducing the number of trips to the compost heap.

The cloth bag fits through the mower's handle to secure it in place and can easily be removed. A quick, simple and efficient system.

**CENTRAL CUTTING HEIGHT ADJUSTMENT**

Comfortably change the cutting height centrally with one lever – choose from 6 different positions giving a cutting height range from 28 - 92mm.

**LM1 CR53**

Cutting width:	53 cm / 21"
Mowing area:	950 m <sup>2</sup> /h
Grass bag capacity:	70 l
Engine:	Cub Cadet 45 OHV, Pull starter
Engine displacement:	140 cm <sup>3</sup>
Drive:	Rear-wheel drive
Cutting height adjustment:	6 positions/central

# MOW AT YOUR OWN PACE

The intuitive, state-of-the-art MySPEED™ handle on our LM2 and LM3 lawnmowers means that the lawnmower drives at your walking speed. Simply grab the handle, start to walk and see how easy and relaxing mowing can be.

The MySPEED™ system delivers high-performance and industry-leading control with ultra-soft rubber grips to reduce vibrations and operator fatigue. With a MySPEED™ equipped lawnmower, you will experience smoother engagement, superior speed variability and enhanced traction – all with no effort and whilst simply walking at your natural pace.



**MYSPEED**

## THE MYSPEED DRIVE SYSTEM

The wheel drive is automatically switched on as soon as you push the handle forward. The speed automatically adjusts to your walking speed.

## THE 4TH AND 5TH LETTER IN THE PRODUCT NAME

Cub Cadet lawnmowers and lawn tractors carry their technology in the name. The first 2 or 3 letters show the product series and the number stands for the cutting width. The 4th letter then indicates the engine displacement class (not applicable for zero-turns):

A = up to 99 cm <sup>3</sup>	F = 201–225 cm <sup>3</sup>	M = 376–399 cm <sup>3</sup>
B = 100–125 cm <sup>3</sup>	G = 226–250 cm <sup>3</sup>	N = 400–499 cm <sup>3</sup>
C = 126–150 cm <sup>3</sup>	H = 251–275 cm <sup>3</sup>	O = 500–599 cm <sup>3</sup>
D = 151–175 cm <sup>3</sup>	I = 276–300 cm <sup>3</sup>	P = 600–699 cm <sup>3</sup>
E = 176–200 cm <sup>3</sup>	J = 301–325 cm <sup>3</sup>	Q = 700–799 cm <sup>3</sup>
(or E Rider)	K = 326–350 cm <sup>3</sup>	R = 800–899 cm <sup>3</sup>
	L = 351–375 cm <sup>3</sup>	S = 900–999 cm <sup>3</sup>

The 5th letter and additional lower-case letters signal further special product features and benefits:

**Lawnmowers:**  
P = push mowers, F = front-wheel drive, R = rear-wheel drive

**Lawn tractors:**  
R = rear discharge, S = side discharge

e = electric starter (lawnmower)

i = engines with fuel injection (zero-turns)

s = MySpeed (mowers)

d = double-wheeled zero-turns (Z9)

**LM2**  
FORCE SERIES

**KEY BENEFITS**

**ELECTRIC START**

Get your lawnmower started with the turn of a key. Available on the LM2 DR46es

**MySPEED™  
VARIABLE SPEED CONTROL**

With a variable drive speed system you will set your mowing pace, not the lawnmower.

**HEIGHT ADJUSTABLE HANDLE**

The handle can be matched to your preferred height, providing a stress and fatigue free mowing experience.

**CENTRAL CUTTING HEIGHT ADJUSTMENT**

One lever adjusts all four wheels simultaneously. The conveniently placed central lever enables six different cutting heights from 28 – 92mm.

**LARGE GRASS BAG**

A large grass bag reduces the amount of time spent emptying it, enabling quicker mowing and reducing the number of trips to the compost heap.



**3-in-1**

**COLLECT, DISCHARGE & MULCHING.**

3-in-1 means that you have the choice between collecting the clippings, discharging them out the back, or mulching.

Mulching means that the grass is cut several times and then equally distributed onto the ground where it can be used as a natural fertiliser; good for the environment and good for your lawn.. Plus there is no collecting or grass disposal which saves you time.

**LM2 SERIES – POWERFUL AND COMFORTABLE**

Our LM2 series mowers come with powerful Cub Cadet engines and many comfort features. First and foremost, there's the MySpeed variable speed drive, which makes mowing incredibly comfortable and flexible. Simply walk at your own pace, and the LM2 series mower reacts to your desired walking speed, meaning a relaxed mowing experience.

**MODELS AVAILABLE**



**LM2 DR46s**

Cutting width:	46 cm / 18"
Mowing area:	750 m <sup>2</sup> /h
Grass bag capacity:	60 l
Engine:	Cub Cadet 55 OHV, Pull starter/AutoChoke
Engine displacement:	159 cm <sup>3</sup>
Drive:	Rear-wheel drive
Cutting height adjustment:	6 positions/central



**LM2 DR46es**

Cutting width:	46 cm / 18"
Mowing area:	750 m <sup>2</sup> /h
Grass bag capacity:	60 l
Engine:	Cub Cadet 55 OHV, Electric starter
Engine displacement:	159 cm <sup>3</sup>
Drive:	Rear-wheel drive
Cutting height adjustment:	6 positions/central

Briggs & Stratton® is a registered trademark of Briggs & Stratton, LLC.

# 4-in-1

## COLLECTION, REAR DISCHARGE, SIDE DISCHARGE & MULCHING

4-in-1 means you have the choice of four different options for disposing of the grass clippings, giving you the flexibility to mow your way. A 4-in-1 lawnmower offers the freedom to select the ideal discharge solution for all conditions.

### MODELS AVAILABLE



#### HIGH REAR WHEELS

High rear wheels let you negotiate potholes and uneven lawns effortlessly, for ultra-comfortable handling and smooth driving.



#### HARD-TOP BAG WITH FILL INDICATOR

The dustproof hard-top means less dust during dry periods, while the fill indicator flap indicates when the grass bag is full and needs emptying.



#### EASY STARTING ENGINE

The Briggs & Stratton engines with ReadyStart® Technology and Start Guarantee® let you start the mower more easily and confidently. Available on the LM3 CR46s and LM3 CR53s.

## LM3 SERIES - STRONG PERFORMANCE AND MAXIMUM FLEXIBILITY

The flagship models of the LM Series will impress you with their superb features; a range of powerful engines for rapid mowing, the 4-in-1 system for total flexibility in mowing options, variable driving speed with MySpeed available on all models and many more convenient features. So you're guaranteed to find the Cub Cadet lawnmower that perfectly meets your demands and requirements.



LM3 CR46s

Cutting width:	46 cm / 18"
Mowing area:	750 m <sup>2</sup> /h
Grass bag capacity:	60 l
Engine:	B&S 575 EX-Series, ReadyStart®, Pull starter
Engine displacement:	140 cm <sup>3</sup>
Drive:	Rear-wheel drive
Cutting height adjustment:	6 positions/central



LM3 CR53s

Cutting width:	53 cm / 21"
Mowing area:	950 m <sup>2</sup> /h
Grass bag capacity:	70 l
Engine:	B&S 625 EXI Series, ReadyStart®, Pull starter
Engine displacement:	150 cm <sup>3</sup>
Drive:	Rear-wheel drive
Cutting height adjustment:	6 positions/central



LM3 DR53es

Cutting width:	53 cm / 21"
Mowing area:	950 m <sup>2</sup> /h
Grass bag capacity:	70 l
Engine:	Cub Cadet 55 OHV ES, Electric
Engine displacement:	159 cm <sup>3</sup>
Drive:	Rear-wheel drive
Cutting height adjustment:	6 positions/central

Briggs & Stratton® is a registered trademark of Briggs & Stratton, LLC.



**STRONG ENOUGH TO CUT EVERYTHING**

The Cub Cadet LC3 DP56 lawn trimmer is ideal for clearing long grass and heavy scrub. With the powerful Cub Cadet engine and ultra-large cutting width (56cm / 22") you can trim long grass and weeds at a stroke.

**EXCEPTIONALLY EASY TO HANDLE**

The large, 36-cm-diameter wheels negotiate even uneven ground with remarkable agility. The special design of the cutting head helps you effortlessly curve around obstacles and reach into corners.



**POWERFUL PERFORMANCE**  
Thanks to the power of a high quality Cub Cadet engine, managing tough jobs is a breeze. Another area where the Cub Cadet comes into its own.

**EASY HEIGHT ADJUSTMENT**  
Adjust the cutting height to your requirements with ease. Low to trim along fences, walls and buildings, higher for long, dense weeds on open ground.

**LC3 DP56**



Cutting width:	56 cm / 22"
Cutting height:	60–110 mm
Line:	Ø 3.9 mm
Engine:	Cub Cadet 55 OHV
Wheels:	Ø 360 mm
Drive:	Pushed
Net weight:	31 kg

**ACCESSORY**

**REPLACEMENT LINE FOR LC3 DP56**



10 pcs. of cutting line AF3.20, cut to 3.9 mm x 47 cm length

Part number:  
1182-WS-0001

## LM1 CR53    LM2 DR46s    LM2 DR46es    LM3 CR46s

ENGINE				
Engine type	Cub Cadet 45 OHV	Cub Cadet 55 OHV	Cub Cadet 55 OHV	B&S 575 EX-Series, ReadyStart®
Engine displacement	140 cm³	159 cm³	159 cm³	140 cm³
Rated power	2.1 kW / 2,800 min⁻¹	2.5 kW / 2,800 min⁻¹	2.5 kW / 2,800 min⁻¹	2.1 kW / 2,800 min⁻¹
Engine start	Pull	Pull/AutoChoke	Electric	Pull
Tank volume (capacity)	1.0 l	1.0 l	1.0 l	0.8 l
DRIVE SYSTEM				
Drive	Rear-wheel drive	Rear-wheel drive	Rear-wheel drive	Rear-wheel drive
Selectable speeds	1	Variable	Variable	Variable
Speed (max)	3.6 km/h	0–3.6 km/h	0–3.6 km/h	0–3.6 km/h
CUTTING SYSTEM				
Mowing area in m²h	950	750	750	750
Cutting deck (material)	Steel	Steel	Steel	Steel
Cutting width	53 cm / 21"	46 cm / 18"	46 cm / 18"	46 cm / 18"
Cutting options	3-in-1 Option	3-in-1	3-in-1	4-in-1
Cutting height adjustment	6 positions/central	6 positions/central	6 positions/central	6 positions/central
Cutting height (min–max)	28–92 mm	28–92 mm	28–92 mm	28–92 mm
Grass bag	Standard	Standard	Standard	Standard
Mulch Kit (Product code)	Optional (196-589-678)	Standard	Standard	Standard
Side discharge	–	–	–	Standard
Rear discharge without collector	Standard	Standard	Standard	Standard
GRASS BAG				
Grass bag type	Soft bag	Soft bag	Soft bag	Soft bag with hard top
Grass bag capacity	70 l	60 l	60 l	60 l
Bag full indicator	–	–	–	Standard
WHEELS				
Wheels (F/R)	200 mm / 200 mm	180 mm / 200 mm	180 mm / 200 mm	180 mm / 280 mm
Double ball bearings	Standard	Standard	Standard	Standard
COMFORT				
Washing nozzle	Standard	Standard	Standard	Standard
Handle type	Ergonomic	MySpeed	MySpeed	MySpeed
Foldable handle	Standard	Standard	Standard	Standard
Height adjustable handle	Standard	Standard	Standard	Standard
Handle covering	Soft-Grip	–	–	–
DIMENSIONS				
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s²			
Dimensions (L/W/H)	162 cm / 58 cm / 114 cm	150 cm / 49 cm / 114 cm	150 cm / 49 cm / 114 cm	155 cm / 49 cm / 114 cm
Net weight	34 kg	31 kg	35 kg	34 kg

## LM3 CR53s    LM3 DR53es    LC3 DP56

ENGINE			
Engine type	B&S 625 EXi Series, ReadyStart®	Cub Cadet 55 OHV ES	Cub Cadet 55 OHV
Engine displacement	150 cm³	159 cm³	159 cm³
Rated power	2.2 kW / 2,800 min⁻¹	2.5 kW / 2,600 min⁻¹	2.1 kW / 2,800 min⁻¹
Engine start	Pull	Electric	Pull
Tank volume (capacity)	1.0 l	1.0 l	1.0 l
DRIVE SYSTEM			
Drive	Rear-wheel drive	Rear-wheel drive	Pushed
Selectable speeds	Variable	Variable	–
Speed (max)	0–3.6 km/h	0–3.6 km/h	–
CUTTING SYSTEM			
Mowing area in m²h	950	950	1,000
Cutting deck (material)	Steel	Steel	Steel
Cutting width	53 cm / 21"	53 cm / 21"	56 cm / 22"
Cutting options	4-in-1	4-in-1	–
Cutting height adjustment	6 positions/central	6 positions/central	–
Cutting height (min–max)	28–92 mm	28–92 mm	60-110 mm
Grass bag	Standard	Standard	–
Mulch Kit (Product code)	Standard	Standard	–
Side discharge	Standard	Standard	–
Rear discharge without collector	Standard	Standard	–
GRASS BAG			
Grass bag type	Soft bag with hard top	Soft bag with hard top	–
Grass bag capacity	70 l	70 l	–
Bag full indicator	Standard	Standard	–
WHEELS			
Wheels (F/R)	200 mm / 280 mm	200 mm / 280 mm	∅ 360 mm
Double ball bearings	Standard	Standard	Slide bearings
COMFORT			
Washing nozzle	Standard	Standard	–
Handle type	MySpeed	MySpeed	3 positions
Foldable handle	Standard	Standard	–
Height adjustable handle	Standard	Standard	–
Handle covering	–	–	–
DIMENSIONS			
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s²	5.0 / 1.5 m/s²	6.5 / 1.5 m/s²
Dimensions (L/W/H)	162 cm / 58 cm / 114 cm	162 cm / 58 cm / 114 cm	140 cm / 55 cm / 100 cm
Net weight	36 kg	41 kg	31 kg

THE BEST CUB CADET MOWERS ON THE MARKET

XMM ENDURO SERIES™



—3T— Cub Cadet TECHNOLOGY

Grass cuttings are transported through a turbo tunnel into the grass bag, improving mowing performance and preventing cuttings becoming stuck or left on the lawn.

1 A CHOICE OF AVAILABLE TRANSMISSION TYPES

- **Single Speed** (XM1 DR46, XM1 ER53)
- **VarioSpeed** – 6 speeds, perfect for any setting (XM2 DR46, XM2 ER53e).
- **MySpeed EVO** – automatically adjusts to your walking speed. The maximum speed can be preset using a range of detents (XM2 DR46s).
- **Variable drive** – Stepless speed via controller (XM3 ER53).

MYSPEED EVO



**AVS ANTI-VIBRATION SYSTEM**  
Special axle dampers above the deck absorb vibrations from the engine.

- 2 **LARGE GRASS BAG** (65/75/80 Litres) with full indicator & dust cover
- 3 **ADJUSTABLE HANDLE HEIGHT** for your comfort
- 4 **CONVENIENT CENTRAL 6-STEP CUTTING HEIGHT ADJUSTMENT** to achieve the finished grass height you require
- 5 **ELECTRIC START AT THE TOUCH OF A BUTTON** (XM2 ER53e) for ease of use
- 6 **3-in-1 MULCH KIT** means that you have the choice between collecting the clippings, discharging them out the back or mulching.



**POWERFUL ENGINES WITH LARGE DISPLACEMENT**

**Cub Cadet ENGINES** One XM2 mower and all XM1 mowers come complete with powerful Cub Cadet engines that extend the service life of your lawnmower with outstanding performance particularly on tall grass.

**HONDA ENGINE** Two XM2 mowers feature Honda engines that are notably quiet and produce lower noise and vibration levels during operation.



**ROBUST DESIGN AND HIGH-QUALITY COMPONENTS**

The single die-cast housing is extremely robust: there are no screws that can come loose ensuring the machine is easy for you to use. Tough front and side bumpers protect the mower from obstacles.



**FAST CLEANING**  
An integrated mowing deck washing nozzle and a special cleaning position mean raising, rinsing and cleaning the body couldn't be easier.



**TOP-QUALITY WHEELS**  
Each with double ball bearings for optimal running performance and durability.

KEY BENEFITS



TURBO TUNNEL

—3T— *Cub Cadet*  
**TECHNOLOGY**

A specially developed geometry inside the mower housing ensures all cuttings are transported through a **turbo tunnel** into the grass bag, improving mowing performance.



**AVS ANTI-VIBRATION SYSTEM**

Special axle dampers above the deck absorb vibrations from the engine for smooth and easy use for you.



**FAST CLEANING**

The mower stands firmly when turned over for easy access to the blades and mowing deck. The integrated mowing deck washing nozzle makes cleaning the housing easier.



**POWERFUL CUB CADET ENGINE**

Delivers the power you need for faster and easier mowing. Ultra-durable engines offer unrivalled performance, especially on long grass.

**UNDERPINNING THE VERY BEST RESULTS**

The XM1 lawnmowers break new ground when it comes to power, performance and precision. The premium aluminium decks are durable and easy to clean with smooth, balanced engines that deliver exceptional performance with minimal vibrations.

The XM1 lawnmowers benefit from Cub Cadet 3T Technology, ensuring perfect mowing results cut after cut, season after season.

MODELS AVAILABLE



3-in-1  
POWERED BY  
*Cub Cadet*

**XM1 DR46**

Cutting width:	46 cm / 18"
Mowing area:	750 m <sup>2</sup> /h
Grass bag capacity:	65 l
Engine:	Cub Cadet 55 OHV, Pull starter
Engine displacement:	159 cm <sup>3</sup>
Drive:	SingleSpeed
Cutting height adjustment:	6 positions/central



3-in-1  
POWERED BY  
*Cub Cadet*

**XM1 ER53**

Cutting width:	53 cm / 21"
Mowing area:	950 m <sup>2</sup> /h
Grass bag capacity:	75 l
Engine:	Cub Cadet 65 OHV, Pull starter
Engine displacement:	196 cm <sup>3</sup>
Drive:	SingleSpeed
Cutting height adjustment:	6 positions/central

# XM2

ENDURO SERIES™

## KEY BENEFITS



TURBO TUNNEL

### —3T— *Cub Cadet* TECHNOLOGY

A specially developed geometry inside the mower housing ensures all cuttings are transported through a **turbo tunnel** into the grass bag, improving mowing performance.



**POWERFUL ENGINES**  
Get the power you need for fast and efficient working with the powerful Cub Cadet engine or the smooth Honda engine.



### FAST CLEANING

The mower stands firmly when turned over for easy access to the blades and mowing deck. The integrated mowing deck washing nozzle makes cleaning the housing easier.



**VARIOSPEED**  
6 speeds, perfect for any setting. (XM2 DR46, XM2 ER53e)



### AVS ANTI-VIBRATION SYSTEM

Special axle dampers above the deck absorb vibrations from the engine for smooth and easy use for you.



**ELECTRIC STARTER**  
The XM2 ER53e engine starts easily at a push of a button.

## MODELS AVAILABLE



3-in-1  
HONDA  
ENGINE

### XM2 DR46

Cutting width:	46 cm / 18"
Mowing area:	750 m <sup>2</sup> /h
Grass bag capacity:	65 l
Engine:	Honda GCV 160, Pull
Engine displacement:	160 cm <sup>3</sup>
Drive:	VarioSpeed
Cutting height adjustment:	6 positions/central



3-in-1  
HONDA  
ENGINE  
MYSPEED EVO

### XM2 DR46s

Cutting width:	46 cm / 18"
Mowing area:	750 m <sup>2</sup> /h
Grass bag capacity:	65 l
Engine:	Honda GCV 160, Pull
Engine displacement:	160 cm <sup>3</sup>
Drive:	MySpeed EVO
Cutting height adjustment:	6 positions/central



3-in-1  
POWERED BY  
Cub Cadet

### XM2 ER53e

Cutting width:	53 cm / 21"
Mowing area:	950 m <sup>2</sup> /h
Grass bag capacity:	75 l
Engine:	Cub Cadet 65 OHV ES, Electric
Engine displacement:	196 cm <sup>3</sup>
Drive:	VarioSpeed
Cutting height adjustment:	6 positions/central

## EVERYTHING A LAWMOWER NEEDS TO BE

The Cub Cadet XM2 lawnmowers offer you the best of both worlds. In addition to the XM1 features they incorporate either VarioSpeed or MySpeed™ EVO wheel drive, adjusting to any situation or your walking speed, as well as powerful engines, whilst still having 3T technology.

# XM3

ENDURO SERIES™



3-in-1

Powered by  
**Kawasaki**

### XM3 ER53

Cutting width:	53 cm / 21"
Mowing area:	950 m <sup>2</sup> /h
Grass bag capacity:	80 l
Engine:	Kawasaki FJ 180 V KAI, Pull starter
Engine displacement:	179 cm <sup>3</sup>
Drive:	Variable drive
Cutting height adjustment:	6 positions/central

# OUR TOP MODEL FOR EFFICIENT MOWING

The Cub Cadet XM3 ER53 delivers everything you could want from a lawnmower; exceptional mowing performance, efficiency, easy handling and a professional appearance.

High performance comes from the powerful Kawasaki engine that gets more output than you'd expect from every cubic centimetre of engine displacement.

The blade-brake clutch allows the engine to keep running even when the blade is disengaged, so you don't have to restart the engine every time.

The XM3 ER53 is a must-have machine ideal for both professional and expert gardener use, making short work of even large lawns by combining strength and efficiency.

2  
LAWNMOWERS

## KEY BENEFITS



### BLADE-BRAKE CLUTCH (BBC)

This feature will keep the engine running with the mowing deck switched off, providing safety when you are emptying the grass bag and saving you time because there's no need to restart the engine.



### HEAVY DUTY TRANSMISSION

The aluminium housing on the transmission gives you more durability and longer machine life.



### STEEL RIMS

Supported by ball bearings the steel rims improve the running quality and give you better stability.



### POWERFUL ENGINE

The professional Kawasaki FJ 180 V Kai engine gets more output than you'd expect from every cubic cm of engine displacement, giving you the power to negotiate and mow slopes up to 30°.

	XM1 DR46	XM1 ER53	XM2 DR46
<b>ENGINE</b>			
Engine type	Cub Cadet 55 OHV	Cub Cadet 65 OHV	Honda GCV 160
Engine displacement	159 cm <sup>3</sup>	196 cm <sup>3</sup>	160 cm <sup>3</sup>
Rated power	2.5 kW / 2,800 min <sup>-1</sup>	3.3 kW / 2,800 min <sup>-1</sup>	2.8 kW / 2,800 min <sup>-1</sup>
Engine start	Pull	Pull	Pull
Tank volume (capacity)	1.0 l	1.0 l	1.0 l
<b>DRIVE SYSTEM</b>			
Drive	SingleSpeed	SingleSpeed	VarioSpeed
Number of speeds	1	1	6 forward
Speed (max)	3.9 km/h	3.9 km/h	3.2–5.3 km/h
<b>CUTTING SYSTEM</b>			
Mowing area in m <sup>2</sup> h	750	950	750
Cutting deck (material)	Aluminium	Aluminium	Aluminium
Cutting width	46 cm / 18"	53 cm / 21"	46 cm / 18"
Cutting options	3-in-1	3-in-1	3-in-1
Cutting height adjustment	6 positions/central	6 positions/central	6 positions/central
Cutting height (min–max)	20–90 mm	20–90 mm	20–90 mm
Grass bag	Standard	Standard	Standard
Mulch Kit (Product code)	Standard	Standard	Standard
Side discharge	–	–	–
Rear discharge without collector	Standard	Standard	Standard
<b>GRASS BAG</b>			
Grass bag type	Soft bag with dustblocker	Soft bag with dustblocker	Soft bag with dustblocker
Grass bag capacity	65 l	75 l	65 l
Bag full indicator	Standard	Standard	Standard
<b>WHEELS</b>			
Wheels (F/R)	200 mm / 240 mm	200 mm / 240 mm	200 mm / 240 mm
Double ball bearings	Standard	Standard	Standard
<b>COMFORT</b>			
Washing nozzle	Standard	Standard	Standard
Handle type	Ergonomic	Ergonomic	Ergonomic
Foldable handle	Standard	Standard	Standard
Height adjustable handle	Standard	Standard	Standard
Handle covering	–	–	–
<b>DIMENSIONS</b>			
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	182 cm / 49 cm / 101 cm	189 cm / 55 cm / 103 cm	182 cm / 49 cm / 101 cm
Net weight	42 kg	45 kg	46 kg

	XM2 DR46s	XM2 ER53e	XM3 ER53
<b>ENGINE</b>			
Engine type	Honda GCV 160	Cub Cadet 65 OHV ES	Kawasaki FJ 180 V KAI
Engine displacement	160 cm <sup>3</sup>	196 cm <sup>3</sup>	179 cm <sup>3</sup>
Rated power	2.8 kW / 2,800 min <sup>-1</sup>	3.3 kW / 2,550 min <sup>-1</sup>	2.8 kW / 2,800 min <sup>-1</sup>
Engine start	Pull	Electric	Pull
Tank volume (capacity)	1.1 l	1.1 l	1.6 l
<b>DRIVE SYSTEM</b>			
Drive	MySpeed EVO	VarioSpeed	Variable drive
Number of speeds	1	6 forward	Stepless
Speed (max)	2.8–3.9 km/h	3.2–5.3 km/h	–
<b>CUTTING SYSTEM</b>			
Mowing area in m <sup>2</sup> h	750	950	950
Cutting deck (material)	Aluminium	Aluminium	Aluminium
Cutting width	46 cm / 18"	53 cm / 21"	53 cm / 21"
Cutting options	3-in-1	3-in-1	3-in-1
Cutting height adjustment	6 positions/central	6 positions/central	6 positions/central
Cutting height (min–max)	20–90 mm	20–90 mm	20–90 mm
Grass bag	Standard	Standard	Standard
Mulch Kit (Product code)	Standard	Standard	Standard
Side discharge	–	–	–
Rear discharge without collector	Standard	Standard	Standard
<b>GRASS BAG</b>			
Grass bag type	Soft bag with dustblocker	Soft bag with dustblocker	Soft bag with dustblocker
Grass bag capacity	65 l	75 l	80 l
Bag full indicator	Standard	Standard	Standard
<b>WHEELS</b>			
Wheels (F/R)	200 mm / 240 mm	200 mm / 240 mm	200 mm / 240 mm
Double ball bearings	Standard	Standard	Standard
<b>COMFORT</b>			
Washing nozzle	Standard	Standard	Standard
Handle type	MySpeed EVO	Ergonomic	Ergonomic
Foldable handle	Standard	Standard	Standard
Height adjustable handle	Standard	Standard	Standard
Handle covering	–	–	–
<b>DIMENSIONS</b>			
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>	5 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	182 cm / 49 cm / 101 cm	189 cm / 55 cm / 103 cm	189 cm / 55 cm / 94 cm
Net weight	43 kg	48 kg	57 kg



**LR**  
FORCE SERIES

# COMPACT AND VERSATILE LIKE NEVER BEFORE

**FIND OUR ZERO-EMISSION  
E-RIDER ON PAGE 47**

## MINI-RIDERS

The Cub Cadet Mini-Riders deliver the same strength, durability and perfect cut as our larger lawn tractors, just in a more compact design. Plus, you have the choice between two models with transmatic and one model with hydrostatic drive or our full-electric model LR2 ES76. The Cub Cadet Mini-Riders are more than just compact, they are comfortable, convenient and unmatched in quality.

LR1  
FORCE SERIES



COMPACT AND VERSATILE LIKE NEVER BEFORE

Modern design, versatility and comfortable mowing – just three of the many reasons to choose a Cub Cadet LR1 Mini-Rider. The compact and manoeuvrable Mini-Riders with electric start are equipped with powerful and low-maintenance Cub Cadet engines.

Thanks to their space-saving design, these models are almost as compact as a conventional walk behind mower in terms of garage space.

The Mini-Riders also allow you the option to collect, discharge or mulch your grass clippings.

INTELLIGENT PARKING ASSISTANCE (ONLY LR2)

the IPA system helps park your MINI-RIDER in the garage with ease. The intelligent system is designed to reduce the speed of your MINI-RIDER while in reverse.

200 LITRE GRASS CATCHER  
(Models LR1 MR76 and LR2 NR76)

4.9 LITRE  
FUEL TANK

LARGE TYRES  
Lawn-friendly, yet handy,  
even on uneven terrain

CUTTING HEIGHT  
ADJUSTMENT & PTO CLUTCH  
Easily adjustable cutting height over 5 positions,  
from 38 to 95 mm. Both levers are located  
ergonomically on the right side of the seat

LED LIGHTS  
(ONLY LR2 SERIES)

TRANSMATIC (LR1) OR  
HYDROSTATIC (LR2)  
TRANSMISSION

FRONT BUMPER

76 CM MOWING DECK



MODELS AVAILABLE

3-in-1  
OPTION  
POWERED BY  
Cub Cadet



LR1 MR76

Cutting width:	76 cm / 30"
Mowing area:	2,500 m <sup>2</sup> /h
Grass bag capacity:	Standard 200 l
Engine:	Cub Cadet OHV
Engine displacement:	382 cm <sup>3</sup>
Drive:	Transmatic
Cutting height adjustment:	5 positions
Rear Tow Hitch	Optional extra 196-398-000

3-in-1  
OPTION  
POWERED BY  
Cub Cadet



LR1 MS76

Cutting width:	76 cm / 30"
Mowing area:	3,000 m <sup>2</sup> /h
Grass bag capacity:	Optional 115 l
Engine:	Cub Cadet OHV
Engine displacement:	382 cm <sup>3</sup>
Drive:	Transmatic
Cutting height adjustment:	5 positions
Rear Tow Hitch	Optional extra 196-397-000

**LR2**  
FORCE SERIES



**KEY BENEFITS**



**MOW-IN-REVERSE**

The Reverse Mowing Technology allows you to continue mowing while backing up your MINI-RIDER. As a safety precaution this function must be activated manually. Always make sure that no children or animals are near the mowing area.



**HYDROSTATIC DRIVE SYSTEM**

The LR2 comes complete with a top-quality hydrostatic drive system. With the parking brake on the left and a one-pedal foot control on the right.



**LIGHTS**

LED lights for safer operation at dawn.



**SUPER GRIP PEDALS**

Under challenging conditions, the super grip pedals provide maximum grip for safe driving.

**MINI-RIDER ACCESSORIES**

	<b>TWIN BAGGER</b> 115 litres, for 76 cm decks	Part number: 19A30014OEM
	<b>REAR HITCH</b> Rear hitch for LR series with side discharge	Part number: 196-397-000
	Rear hitch for LR series with rear discharge	Part number: 196-398-000
	<b>MULCH KIT/DEFLECTOR</b> Mulch Kit/Deflector incl. blades for 76 cm / 30" decks	Part number: 196-334-600
	Mulch Kit/Deflector for 60cm / 24" decks	Part number: 196-707-678

**3-in-1**  
OPTION

**COLLECT, OPTIONAL DISCHARGE & MULCHING.**

3-in-1 means that you have the choice between collecting the clippings, discharging them out the back, or mulching.

Mulching means that the grass is cut several times and then equally distributed onto the ground where it can be used as a natural fertiliser; good for the environment and good for your lawn.. Plus there is no collecting or grass disposal which saves you time.

The Side Discharge and Mulching Kits are available as optional extras.

[www.cubcadet.co.uk](http://www.cubcadet.co.uk)

**MODEL AVAILABLE**



**LR2 NR76**

<b>Cutting width:</b>	76 cm / 30"
<b>Mowing area:</b>	2,500 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	Standard 200 l
<b>Engine:</b>	Cub Cadet OHV
<b>Engine displacement:</b>	439 cm <sup>3</sup>
<b>Drive:</b>	Hydrostatic
<b>Cutting height adjustment:</b>	5 positions
<b>Rear Tow Hitch</b>	Optional extra 196-398-000

**THE SIZE YOU NEED WITH  
THE POWER YOU WANT**

The Cub Cadet LR2 Mini-Rider delivers all the strength, durability and cutting performance of larger rider models; but in a more compact design.

Premium hydrostatic transmission and the exclusive IPA system gives you optimum control while in operation.



**LR2**  
FORCE SERIES

# MOWING WITH POWER WHILE RESPECTING THE ENVIRONMENT

Our MINI-RIDER LR2 ES76 uses strong electric motors and is powered by a 56V Li-ION battery. Its large cutting width of 76 cm combined with 60 minutes\* of running time (per charge) make the cutting of large lawns easy. And it comes with a 3 year warranty on both the mower and the battery.

MOWING TIME  
60 MIN\*  
4 HOURS  
CHARGING TIME



LR2 ES76	
Cutting width:	76 cm / 30"
Area performance (rec.):	3,000 m <sup>2</sup> /h
Collecting volume:	Optional 115 l
Engine:	Cub Cadet 56 V / 30 Ah / 1,500 Wh
Drive:	Electric drive
Cutting height adjustment:	5 positions
Model no.:	33BA27JD603

\*When fully charged. Deviations are possible depending on lawn and weather conditions, and grass thickness.

COMFORTABLE CUT & SEW SEAT WITH TOOL-LESS SEAT ADJUSTMENT

ZERO EMISSIONS DURING YOUR WORK

OPTIONAL 115 L GRASS CATCHER

BRIGHT LED HEADLIGHTS  
High visibility even when working at dawn or dusk.

MAINTENANCE- AND SERVICE-FRIENDLY

VARIABLE SPEEDS WITH FOOT PEDAL CONTROL

FRONT BUMPER

RETURN-FUNCTION  
At a battery level of 10 %, the cutting deck automatically switches off help saving power to return to the charging station.

MOW-IN-REVERSE  
The Reverse Mowing Technology allows you to continue mowing while driving backwards (must be activated manually).

56V LI-ION POWER

3  
MINI RIDERS

**Li-Ion**  
ELECTRIC

## LR1 MR76

## LR1 MS76

ENGINE		
Engine type	Cub Cadet OHV	Cub Cadet OHV
Engine displacement	382 cm <sup>3</sup>	382 cm <sup>3</sup>
Rated power	7.4 kW / 2,700 min <sup>-1</sup>	7.9 kW / 2,900 min <sup>-1</sup>
Cylinders	Single	Single
Tank volume (capacity)	4.9 l	4.9 l
Lubrication	Fully pressurised automotive-style oil pump with spin-on oil filter	Fully pressurised automotive-style oil pump with spin-on oil filter
DRIVE SYSTEM		
Transmission	Transmatic	Transmatic
Speeds	6 (f/r), shift-on-the-go	6 (f/r), shift-on-the-go
Control	Foot pedal control with lever for manual pre-selection	Foot pedal control with lever for manual pre-selection
CUTTING SYSTEM		
Mowing area in m <sup>2</sup> h	2,500	3,000
Cutting width	76 cm / 30"	76 cm / 30"
Cutting height (min-max)	38-95 mm	38-95 mm
Cutting options	3-in-1 option	3-in-1 option
Number of blades	1	1
Deck engagement	Manual lever control	Manual lever control
Deck height positions	5 positions	5 positions
Wash nozzle/Mulch Kit	Standard/Optional	Standard/Optional
DISCHARGE SYSTEM		
Type	Rear Discharge	Side Discharge
Bag (capacity)/accessory no.	Standard 200 l/-	Optional 115 l/(19A30014OEM)
Bag lever/Hardtop	2 grips/plastic	-/-
Bag fill indicator/grass deflector	Standard/Optional	-/Standard
FRAME		
Front axle	Steel	Steel
Front bumper	Standard	-
Turning circle	46 cm / 18"	46 cm / 18"
Wheel size (f/r in inch)	13 x 5 / 16 x 6.5	13 x 5 / 16 x 6.5
Wheel bearings	Sleeve bearings	Sleeve bearings
Frame	Easy entry frame	Easy entry frame
Tow hitch	Optional extra 196-398-000	Optional extra 196-397-000
ELECTRICAL		
Battery	12V, 135CCA, AGM	12V, 135CCA, AGM
Headlights	-	-
COMFORT		
Seat type	Comfort Seat	Comfort Seat
Seat adjustment	Tool-less	Tool-less
Steering wheel	Standard	Standard
Mow-in-reverse	Standard	Standard
Battery charger	(196-967-678)	(196-967-678)
DIMENSIONS		
Vibration value body/K-factor	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	225 cm / 86 cm / 112 cm	157 cm / 85 cm / 112 cm
Net weight	144 kg	126 kg

## LR2 NR76

## LR2 ES76

ENGINE		
Engine type	Cub Cadet OHV	Cub Cadet 56 V / 30 Ah / 1,500 Wh
Engine displacement	439 cm <sup>3</sup>	-
Rated power	8.1 kW / 2,700 min <sup>-1</sup>	2.94 kW / 2,083 min <sup>-1</sup>
Cylinders	Single	-
Tank volume (capacity)	4.9 l	-
Lubrication	Fully pressurised automotive-style oil pump with spin-on oil filter	-
DRIVE SYSTEM		
Transmission	Hydrostatic	Electric drive
Speeds	Infinitely variable	Variable
Control	Foot pedal control	Foot pedal control
CUTTING SYSTEM		
Mowing area in m <sup>2</sup> h	2,500	3,000
Cutting width	76 cm / 30"	76 cm / 30"
Cutting height (min-max)	38-95 mm	38-95 mm
Cutting options	3-in-1 option	-
Number of blades	1	1
Deck engagement	Manual lever control	Electric PTO
Deck height positions	5 positions	5 positions
Wash nozzle/Mulch Kit	Standard/Optional	-/Optional
DISCHARGE SYSTEM		
Type	Rear Discharge	Side Discharge
Bag (capacity)/accessory no.	Standard 200 l/-	Optional 115 l/(19A30014OEM)
Bag lever/Hardtop	2 grips/Hardtop	-/-
Bag fill indicator/grass deflector	Standard/Optional	-/Standard
FRAME		
Front axle	Steel	Steel
Front bumper	Standard	Standard, blue
Turning circle	46 cm / 18"	46 cm / 18"
Wheel size (f/r in inch)	13 x 5 / 16 x 6.5	13 x 5 / 16 x 6.5
Wheel bearings	Sleeve bearings	Sleeve bearings
Frame	Easy entry frame	Easy entry frame
Tow hitch	Optional extra 196-398-000	Optional extra 196-397-000
ELECTRICAL		
Battery	12V, 135CCA, AGM	-
Headlights	LED	LED
COMFORT		
Seat type	High Back Comfort Seat	Cut & Sew high backrest
Seat adjustment	Tool-less	Tool-less
Steering wheel	Standard	Standard
Mow-in-reverse	Standard	Standard
Battery charger	(196-967-678)	-
DIMENSIONS		
Vibration value body/K-factor	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	225 cm / 86 cm / 112 cm	170 cm / 85 cm / 112 cm
Net weight	172 kg	122 kg



**LT**  
FORCE SERIES

**XT**  
ENDURO SERIES™

# COMFORT AND EFFICIENCY PERFECTLY COMBINED

## LAWN TRACTORS

**FIND OUR ZERO-EMISSION  
E-TRACTOR ON PAGE 71**

Cub Cadet lawn tractors deliver the perfect mowing experience, cut after cut, season after season.

Equipped with powerful engines and built on durable strong steel frames with hard-wearing components, Cub Cadet lawn tractors are made to work. Our line up of lawn tractors have been ergonomically designed for user comfort, honed to ensure incredibly responsive handling and made to deliver exceptional cut and collecting performance.

Power, strength, comfort and efficiency in every detail.

**LT**  
**FORCE SERIES**



**LT LAWN TRACTORS,  
A STEP UP IN POWER AND PERFORMANCE.**

With a lawn tractor from the FORCE SERIES, mowing lawns becomes an even more efficient and effective gardening experience. The decks on lawn tractors are typically six inches wider than those found on mini-riders and over 16" wider in comparison to a regular lawnmower. With a wider cutting deck and more powerful engines not only can you cut more, but you can mow at a speed which is 2 – 3 times faster, saving you time and effort.

Cub Cadet LT lawn tractors are extraordinarily versatile. They excel when it comes to covering large areas quickly thanks to the oversized grass bag. The side discharge eliminates the need to stop and empty the bag. Thanks to the user-friendly cutting height adjustment, the LT Series achieves optimum cutting results – even on difficult ground.

The LT lawn tractors deliver a perfect mowing performance, exceptional cutting and bagging with incredibly responsive handling. A tow hitch is available as an optional extra for all LT tractors with rear discharge (Part number: 196-399-000)

**DRIVE SYSTEMS**

**TRANSMATIC TRANSMISSION**

Allows shift-on-the-go speed control. Simply choose the driving direction, set the desired basic speed with the speed shift lever on the dashboard and release the brake/clutch pedal. Push the pedal to slow down or press it all the way forward to stop. Releasing the brake pedal automatically brings the tractor back to your preset speed.



**AUTOMATIC TRANSMISSION**

For a smooth change in speed. Using the gear selector you simply choose forward or reverse and adjust the speed with the foot pedal.

**HYDROSTATIC TRANSMISSION**

Impressive with its modern technology and featuring a self-lubricating hydro pump for minimum maintenance and maximum durability. The hydrostatic transmission stands out for its velocity control as well as continual forward and reverse speeds. No clutching or shifting is required which means you can drive more gently with greater accuracy.



# LT1

FORCE SERIES

## KEY BENEFITS

### COMFORTABLE SEAT WITH HIGH BACKREST FOR ALL LT MODELS

The high backrest supports an upright posture, making it far more comfortable.



### CUTTING HEIGHT ADJUSTMENT


5-position height adjustment to easily change the cutting height (30–95 mm).

## KEY BENEFITS



### DIRECT COLLECT®

Our rear discharge tractors are designed to transport grass clippings into the grass bag with optimal efficiency. All LT Series rear discharge models feature a grass bag made of durable fabric for flexibility and have an air passage to guarantee air flow and perfect collection. The hard top controls dust and reduces noise.

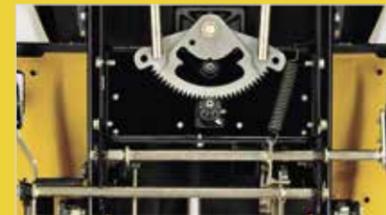

### PRECISE STEERING SYSTEM

All Cub Cadet lawn tractors help redefine your notion of comfort. We improved the steering of the lawn tractors. Our precision gear-steering technology supports operators at work and makes your powerful lawn tractor even more efficient and surprisingly easy to manoeuvre.



### STEEL FRAME

All tractor frames are made of fully welded and powder-coated rugged steel, for added durability.



### FLOATING STEEL OR CAST IRON FRONT AXLE

Keeping all four wheels on the ground, however uneven the surface.



### ONE-PIECE BONNET

The entire engine bonnet can be removed within seconds without the need for tools, allowing for easy maintenance.



### LT1 NR92

Cutting width:	92 cm / 36"
Area performance (rec.):	3,500 m <sup>2</sup> /h
Collecting volume:	240 l
Engine:	Cub Cadet OHV
Engine displacement:	439 cm <sup>3</sup>
Drive:	Transmatic
Cutting height adjustment:	5 positions



### LT1 NS92

Cutting width:	92 cm / 36"
Area performance (rec.):	4,000 m <sup>2</sup> /h
Collecting volume:	Optional 200 l
Engine:	Cub Cadet OHV
Engine displacement:	439 cm <sup>3</sup>
Drive:	Transmatic
Cutting height adjustment:	5 positions

A tow hitch is available as an optional extra for all LT tractors with rear discharge (Part number: 196-399-000). Comes as standard on all side discharge LT models.

Our LT lawn tractors are equipped with powerful and reliable Cub Cadet engines developed in the USA with global parts.. Our LT3 models are equipped with twin cylinder engines.

# LT2

FORCE SERIES

# LT3

FORCE SERIES



**SOFT GRIP STEERING WHEEL**

**MOW-IN-REVERSE**  
Reserve mowing technology. Allows you to cut while in reverse (LT2 and LT3 series).

**COMFORTABLE SEAT WITH HIGH BACKREST**

**PIVOTING ONE-PIECE HOOD**  
The entire engine hood can be folded up within seconds without tools, for easy maintenance.

**CUTTING HEIGHT ADJUSTMENT**  
5-position height adjustment to easily change the cutting height (30–95 mm).



**TRANSMATIC, HYDROSTATIC OR AUTOMATIC DRIVE SYSTEM**

**STEEL FRAME**

## MODELS AVAILABLE



**LT2 NR92**

Cutting width:	92 cm / 36"
Mowing area:	3,500 m <sup>2</sup> /h
Grass bag capacity:	240 l
Engine:	Cub Cadet OHV
Engine displacement:	439 cm <sup>3</sup>
Drive:	Hydrostatic
Cutting height adjustment:	5 positions



**LT2 NS92**

Cutting width:	92 cm / 36"
Lawn area (rec.):	4,000 m <sup>2</sup> /h
Collecting volume:	Optional 200 l
Engine:	Cub Cadet OHV
Engine displacement:	439 cm <sup>3</sup>
Drive:	Automatic
Cutting height adjustment:	5 positions



**LT3 PR105**

Cutting width:	105 cm / 41"
Mowing area:	4,500 m <sup>2</sup> /h
Grass bag capacity:	240 l
Engine:	Cub Cadet 679cm <sup>3</sup> V-TWIN
Engine displacement:	679 cm <sup>3</sup>
Drive:	Hydrostatic
Cutting height adjustment:	5 positions



**LT3 PS107**

Cutting width:	107 cm / 42"
Mowing area:	5,500 m <sup>2</sup> /h
Grass bag capacity:	Optional 200 l
Engine:	Cub Cadet 679cm <sup>3</sup> V-TWIN
Engine displacement:	679 cm <sup>3</sup>
Drive:	Automatic
Cutting height adjustment:	5 positions

A tow hitch is available as an optional extra for all LT tractors with rear discharge (Part number: 196-399-000). Comes as standard on all side discharge LT models.

[www.cubcadet.co.uk](http://www.cubcadet.co.uk)

**NEW**

	LT1 NR92	LT1 NS92	LT2 NR92
<b>ENGINE</b>			
Engine type	Cub Cadet OHV	Cub Cadet OHV	Cub Cadet OHV
Engine displacement	439 cm <sup>3</sup>	439 cm <sup>3</sup>	439 cm <sup>3</sup>
Rated power	8.1 kW / 2,700 min <sup>-1</sup>	8.3 kW / 2,800 min <sup>-1</sup>	8.1 kW / 2,700 min <sup>-1</sup>
Cylinders	Single	Single	Single
Tank volume (capacity)	3.8 l	3.8 l	3.8 l
<b>DRIVE SYSTEM</b>			
Transmission	Transmatic	Transmatic	Hydrostatic
Speeds	7 (f/r), shift-on-the-go	7 (f/r), shift-on-the-go	Variable (f/r)
Control	Foot pedal control with lever for manual pre-selection	Foot pedal control with lever for manual pre-selection	Foot pedal control
<b>CUTTING SYSTEM</b>			
Mowing area in m <sup>2</sup> h	3,500	4,000	3,500
Cutting width	92 cm / 36"	92 cm / 36"	92 cm / 36"
Cutting height (min-max)	30-95 mm	30-95 mm	30-95 mm
Number of blades	2	2	2
Deck engagement	Manual lever control	Manual lever control	Manual lever control
Deck height positions	5 positions	5 positions	5 positions
Deck wheels	2	0	2
Wash nozzle/Mulch Kit	-(196-749A678) Optional	-/Spring-loaded	-(196-749A678) Optional
<b>DISCHARGE SYSTEM</b>			
Type	Rear discharge	Side discharge	Rear discharge
Bag (capacity)/accessory no.	240 l/-	Optional 200l/optional (19A30045OEM)	240 l/-
Bag lever/hardtop	Telescopic handle/PVC Hardtop	-/-	Telescopic handle/PVC hardtop
Bag fill indicator/grass deflector	-(196-750A678) Optional	-/Standard	-(196-750A678) Optional
<b>FRAME</b>			
Front axle	Steel	Steel	Steel
Front bumper	(OEM-190-679) Optional	(OEM-190-679) Optional	(OEM-190-679) Optional
Turning circle	46 cm / 18"	46 cm / 18"	46 cm / 18"
Wheel size (f/r in inch)	15 x 6 / 18 x 9.5	15 x 6 / 20 x 8	15 x 6 / 18 x 9.5
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Frame	Easy entry frame	Easy entry frame	Easy entry frame
<b>ELECTRIC</b>			
Headlights	Standard	Standard	Standard
<b>COMFORT</b>			
Seat type	High Back Comfort Seat	High Back Comfort Seat	High Back Comfort Seat
Seat adjustment	Tool-less	Tool-less	Tool-less
Steering wheel	Standard	Standard	Soft-Grip
Toolbox/Cupholder	-/-	-/-	-/-
Mow-in-reverse	-	-	Standard
Battery charger	(196-967-678) Optional	(196-967-678) Optional	(196-967-678) Optional
<b>DIMENSIONS</b>			
Vibration value body/K-factor	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	225 cm / 99 cm / 103 cm	170 cm / 99 cm / 100 cm	225 cm / 99 cm / 103 cm
Net weight	195 kg	150 kg	195 kg

A tow hitch is available as an optional extra for all LT tractors with rear discharge (Part number: 196-399-000). Comes as standard on all side discharge LT models.

**NEW**

	LT2 NS92	LT3 PR105	LT3 PS107
<b>ENGINE</b>			
Engine type	Cub Cadet OHV	Cub Cadet OHV	Cub Cadet OHV
Engine displacement	439 cm <sup>3</sup>	679 cm <sup>3</sup>	679 cm <sup>3</sup>
Rated power	8.3 kW / 2,800 min <sup>-1</sup>	12.7 kW / 2,700 min <sup>-1</sup>	12.3 kW / 2,600 min <sup>-1</sup>
Cylinders	Single	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	3.8 l	3.8 l	3.8 l
<b>DRIVE SYSTEM</b>			
Transmission	Automatic	Hydrostatic	Automatic
Speeds	Variable (f/r)	Variable (f/r)	Variable (f/r)
Control	Selector with foot pedal control	Foot pedal control	Selector with foot pedal control
<b>CUTTING SYSTEM</b>			
Mowing area in m <sup>2</sup> h	4,000 m <sup>2</sup> h	4,500	5,500
Cutting width	92 cm / 36"	105 cm / 41"	107 cm / 42"
Cutting height (min-max)	30-95 mm	30-95 mm	30-95 mm
Number of blades	2	2	2
Deck engagement	Manual lever control	Manual lever control	Manual lever control
Deck height positions	5 positions	5 positions	5 positions
Deck wheels	0	2	2
Wash nozzle/Mulch Kit	-/Spring-loaded	Standard/(196-749A678) Optional	Standard/(196-749A678) Optional
<b>DISCHARGE SYSTEM</b>			
Type	Side discharge	Rear discharge	Side discharge
Bag (capacity)/accessory no.	Optional 200 l/optional (19A30045OEM)	240 l/-	Optional 200 l/ (19A30045OEM)
Bag lever/hardtop	-/-	Telescopic handle/PVC hardtop	-/-
Bag fill indicator/grass deflector	-/Standard	-(196-750A678) Optional	-/Standard
<b>FRAME</b>			
Front axle	Steel	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	(OEM-190-679) Optional	Standard	Standard
Turning circle	46 cm / 18"	46 cm / 18"	46 cm / 18"
Wheel size (f/r in inch)	15 x 6 / 20 x 8	15 x 6 / 18 x 9.5	15 x 6 / 20 x 8
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Frame	Easy entry frame	Easy entry frame	Easy entry frame
<b>ELECTRIC</b>			
Headlights	Standard	Standard	Standard
<b>COMFORT</b>			
Seat type	High Back Comfort Seat	High Back Comfort Seat	High Back Comfort Seat
Seat adjustment	Tool-less	Tool-less	Tool-less
Steering wheel	Soft-Grip	Soft-Grip	Soft-Grip
Toolbox/Cupholder	-/-	-/-	-/-
Mow-in-reverse	Standard	Standard	Standard
Battery charger	(196-967-678) Optional	(196-967-678) Optional	(196-967-678) Optional
<b>DIMENSIONS</b>			
Vibration value body/K-factor	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	170 cm / 99 cm / 100 cm	225 cm / 110 cm / 103 cm	170 cm / 110 cm / 100 cm
Net weight	150 kg	198 kg	175 kg

A tow hitch is available as an optional extra for all LT tractors with rear discharge (Part number: 196-399-000). Comes as standard on all side discharge LT models.

# STRONG, POWERFUL AND AGILE.



Powerful performance, agility and market leading innovations make the XT ENDURO SERIES the best lawn tractors Cub Cadet has ever built. Cub Cadet has seen over a million XT Enduro series lawn tractors come off the US production line in Martin, Tennessee, showing just how popular these machines are with expert gardeners worldwide.

Designed for the expert gardener the XT ENDURO SERIES boasts the tightest turning circle on the market, especially useful if your lawn has obstacles such as trees and shaped beds.

The power and performance of the XT ENDURO SERIES will allow you to finish your work faster and with better results - meeting and exceeding your high expectations.

## OUR TOP 5 LEADING FEATURES

1.

### CUTTING, COLLECTING AND MULCHING 3-IN-1 SYSTEM

3-in-1 option means that you have the choice between collecting the clippings, or discharging them out the back. You also have the option to buy an additional mulch kit as an accessory.



### JUST 17 CM TURNING RADIUS

Unbeatable efficiency even in confined spaces thanks to our innovative TIGHT TURN XTREME technology available on all XT2 and XT3 models.

2.

3.

### ULTRA-STURDY, CORROSION-RESISTANT FRAME

Ultra-rigid frame for top durability.



### PERFECTLY MATCHED TRANSMISSION AND ENGINE POWER

Optimal drive system and the most powerful engine in its class.

4.

5.

### ULTRA-RELIABLE V-BELT DESIGN

Improved V-belt design reduces belt tension ensuring longer belt life and impressive stability. The XT2 QS117 and XT3 QS137 tractors are also equipped with a welded fabricated mowing deck.



DECADES OF ENGINE DEVELOPMENT EXPERTISE

MORE THAN **10 MILLION**  
**CUB CADET** ENGINES  
 IN USE **WORLDWIDE**

Cub Cadet has been designing and manufacturing its own engines for decades, with more than ten million units delivered worldwide. Specifically designed for our products, Cub Cadet engines deliver perfect results every time. Because of its global expertise and competitive products, Cub Cadet became the fastest-growing riding mower brand in the U.S..

**MORE GREAT FEATURES THAT MAKE YOUR MOWING EASIER**



**GRASS BAG WITH ELECTRONIC EMPTYING**  
 At the touch of a button, the grass bag lifts up and tips the cuttings out. Effortless, even when the bag is full. Universal optional accessory for all XT models retrofittable from 2018.



**DIAGONAL ADJUSTABLE SEAT**  
 The seat can be adjusted to suit you and provide pure comfort whilst you mow.



**POWERFUL BATTERY**  
 High-quality wet batteries tailored to the engine allow a smooth starting process without the filling of acid.



**MEMORY CURSOR**  
 A cutting height memory cursor which displays your most frequently used and/or favorite cutting heights.



**POWERFUL KAWASAKI V-TWIN ENGINE**  
 A two-cylinder engine for challenging terrain. Ultra-smooth running with low fuel consumption.

**XT MODELS WITH KAWASAKI V-TWIN ENGINES:**  
 XT2 PR95, XT2 QR106, XT2 PS107, XT2 QS117, XT3 QS127, XT3 QS137



## WHICH XT ENDURO TO CHOOSE?

**XT1**  
ENDURO SERIES™

**XT2**  
ENDURO SERIES™

**XT3**  
ENDURO SERIES™



**CUTTING, COLLECTING AND MULCHING SYSTEM**

- All-new grass collecting system and rear-discharge mowing decks.
- With twice the grass-catching of previous Cub Cadet lawn tractors.

320 LITRE BAG CAPACITY

360 LITRE BAG CAPACITY

**HYDROSTATIC V-BELT**

**HYDROSTATIC POWER TRANSMISSION**




Smooth drive system – simply put your foot on the pedal and go

**POWERFUL CUB CADET ENGINE**  
reliable and high performance engine  
(XT1 OS96, XT1 OS107, XT1 OR95,  
XT1 OR106)

**EFFICIENT CUB CADET V-TWIN ENGINE**  
2-cylinder engine  
(XT2 PS117)

**KAWASAKI V-TWIN ENGINE**  
(XT2 PR95, XT2 QR106, XT2 PS107,  
XT2 QS117)

**KAWASAKI V-TWIN ENGINE**  
2-cylinder engine for difficult terrain,  
ultra-smooth running  
and low fuel consumption.  
(XT3 QS127, XT3 QS137)

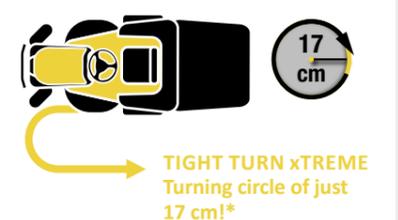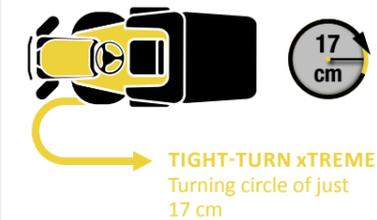

**KEY START**

**SOLID, WELDED MOWING DECK** for XT2 QS117 & XT3 QS137

**ANTI-DUST GRASS BAG SYSTEM**  
AVAILABLE AS AN OPTIONAL EXTRA

**ANTI-DUST SYSTEM**  
Rear discharge with multi-layer dust  
apron included in accessories. The apron  
protects against flying grass and dirt.


\*The turning circle of a lawn tractor involves marking the position of the left rear wheel while the tractor completes a 360-degree circle (on plain ground). Now you measure the distance between the mark and the actual position of the left rear wheel again. Half this distance is the turning circle – included in all product specifications.



**XT1™**  
ENDURO SERIES™



**KEY BENEFITS**



**DIAGONAL ADJUSTABLE SEAT**  
Individually adaptable – pure comfort for all users.



**PUSH BUTTON BLADE START**  
Activate the cutting blades safely and more efficiently.



**MECHANICALLY SUPPORTED CUTTING HEIGHT ADJUSTMENT**  
Quickly and easily select the perfect setting.



**HYDROSTATIC DRIVE SYSTEM**  
Smooth drive system for precise mowing – simply put your foot on the pedal and go.



**MODELS AVAILABLE**



**XT1 OS96**

<b>Cutting width:</b>	96 cm / 38"
<b>Mowing area:</b>	6,000 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	Optional 200 l
<b>Engine:</b>	Cub Cadet
<b>Engine displacement:</b>	547 cm <sup>3</sup>
<b>Drive:</b>	Hydrostatic
<b>Cutting height adjustment:</b>	12 positions



**XT1 OS107**

<b>Cutting width:</b>	107 cm / 42"
<b>Mowing area:</b>	8,000 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	Optional 200 l
<b>Engine:</b>	Cub Cadet
<b>Engine displacement:</b>	547 cm <sup>3</sup>
<b>Drive:</b>	Hydrostatic
<b>Cutting height adjustment:</b>	12 positions



**XT1 OR95**

<b>Cutting width:</b>	95 cm / 38"
<b>Mowing area:</b>	5,500 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	320 l
<b>Engine:</b>	Cub Cadet
<b>Engine displacement:</b>	547 cm <sup>3</sup>
<b>Drive:</b>	Hydrostatic
<b>Cutting height adjustment:</b>	12 positions



**XT1 OR106**


<b>Cutting width:</b>	106 cm / 42"
<b>Mowing area:</b>	7,500 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	320 l
<b>Engine:</b>	Cub Cadet
<b>Engine displacement:</b>	547 cm <sup>3</sup>
<b>Drive:</b>	Hydrostatic
<b>Cutting height adjustment:</b>	12 positions

**UNBELIEVABLE POWER & EFFICIENCY**

The Cub Cadet XT1 lawn tractors are ideally equipped for mowing, collecting and transporting clippings and can be expanded with a range of accessories.



## KEY BENEFITS



**DIAGONAL ADJUSTABLE SEAT**  
Individually adaptable – pure comfort for all users.



**MECHANICALLY SUPPORTED CUTTING HEIGHT ADJUSTMENT**  
Quickly and easily select the perfect setting.



**PUSH BUTTON BLADE START**  
Activate the cutting blades safely and more efficiently.



**HYDROSTATIC DRIVE SYSTEM**  
Smooth drive system for precise mowing – simply put your foot on the pedal and go.

## MODELS AVAILABLE

3-in-1 OPTION Powered by **Kawasaki**



**XT2 PR95**

Cutting width:	95 cm / 38"
Mowing area:	6,000 m <sup>2</sup> /h
Grass bag capacity:	320 l
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	603 cm <sup>3</sup>
Drive:	Hydrostatic
Cutting height adjustment:	12 positions

3-in-1 OPTION Powered by **Kawasaki**



**XT2 QR106**

Cutting width:	106 cm / 42"
Mowing area:	8,000 m <sup>2</sup> /h
Grass bag capacity:	320 l
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	726 cm <sup>3</sup>
Drive:	Hydrostatic
Cutting height adjustment:	12 positions

3-in-1 OPTION Powered by **Kawasaki**



**XT2 PS107**

Cutting width:	107 cm / 42"
Mowing area:	8,500 m <sup>2</sup> /h
Grass bag capacity:	200 l optional
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	603 cm <sup>3</sup>
Drive:	Hydrostatic
Cutting height adjustment:	12 positions

3-in-1 OPTION Powered by **Cub Cadet**



**XT2 PS117**

Cutting width:	117 cm / 46"
Mowing area:	9,000 m <sup>2</sup> /h
Grass bag capacity:	200 l optional
Engine:	Cub Cadet V-Twin dual cylinder
Engine displacement:	679 cm <sup>3</sup>
Drive:	Hydrostatic
Cutting height adjustment:	12 positions

**NEW** Powered by **Kawasaki**



**XT2 QS117**

Cutting width:	117 cm / 46" welded mowing deck
Lawn area (rec.):	9,000 m <sup>2</sup> /h
Collecting volume:	200 l optional
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	726 cm <sup>3</sup>
Drive:	Hydrostatic
Cutting height adjustment:	12 positions

## POWER FOR GREATER CHALLENGES

The Cub Cadet XT2 offers you an even higher level of power, control functions and durability. Tight Turn Xtreme makes them ideal for working on tough terrain, transporting and using additional accessories, whatever the season. At just 17 cm turning circle the XT2 series have the tightest turning radius on the market. Innovative tight turn technology delivers unsurpassed capability in tight places.

## XT2® ENDURO SERIES®



### LI-ION-POWER

Modern battery technology helps provide a long service life as well as speedy charging cycles – once hooked up to an outlet, the battery is fully recharged within 4 hours.

### ZERO-EMISSIONS. SUPERIOR CUT. POWERFUL PERFORMANCE

We have taken the XT Series flagship tractor with its proven strength and performance and combined it with a powerful and convenient lithium-ion battery to create a machine with no power fade and reduced noise for an enjoyable mowing experience; while delivering a superior cut with no compromise on performance. With a running time of approx. 90 minutes, depending on lawn and soil conditions and a cutting width of 107cm / 42", even large lawns can be cut quickly and efficiently. Good for you. Good for the environment.

MOWING TIME  
90 MIN\*  
4 HOURS  
CHARGING TIME



#### XT2 ES107

Cutting width:	107 cm / 42"
Area performance (rec.):	8,000 m <sup>2</sup> /h
Collecting volume:	Optional 200 l
Engine:	Cub Cadet 56 V / 60 Ah / 3,000 Wh
Drive:	Electric drive
Cutting height adjustment:	12 positions

\*Deviations are possible depending on lawn area

- COMFORTABLE CUT & SEW SEAT WITH LEVER SEAT ADJUST**
- USB-PORT**  
Charge your electronic devices while driving, for example your smartphone.
- ZERO EMISSIONS DURING YOUR WORK**
- SERVICE AND MAINTENANCE FRIENDLY**
- FRONT BUMPER**
- VARIABLE SPEEDS WITH FOOT PEDAL CONTROL**
- 107 CM / 42" MOWING DECK**
- 17 cm TURNING RADIUS**
- SIDE DISCHARGE, COLLECT OR MULCH**  
The XT2 ES107 convinces with its standard side discharge mowing function, an integrated mulching kit and the optional grass catcher (as accessory, sold separately). Mulching and collecting may reduce the running time.

4  
LAWN TRACTORS



**XT3™**  
ENDURO SERIES™

Cub Cadet  
**TIGHT TURN  
xTREME**

Just 17 cm turning circle thanks to TIGHT TURN xTREME.



17  
cm

**KEY BENEFITS**



**HYDROSTATIC  
POWER  
TRANSMISSION**



**STRONG V-TWIN  
KAWASAKI ENGINE**  
Two-cylinder engine  
for demanding terrain  
with particularly quiet  
running and low fuel  
consumption.

**HIGH TRACTION  
EVEN ON  
CHALLENGING  
TERRAIN**



**WELDED MOWING DECK**  
For high durability and  
robustness on  
the XT3 QS137.

**MODELS AVAILABLE**



Powered by  
**Kawasaki**

**XT3 QS127**

<b>Cutting width:</b>	127 cm / 50"
<b>Mowing area:</b>	10,000 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	Optional 210 l
<b>Engine:</b>	Kawasaki, V-TWIN dual cylinder
<b>Engine displacement:</b>	726 cm <sup>3</sup>
<b>Drive:</b>	Hydrostatic with differential lock
<b>Cutting height adjustment:</b>	12 positions



Powered by  
**Kawasaki**

**XT3 QS137**

<b>Cutting width:</b>	137 cm / 54" welded mowing deck
<b>Mowing area:</b>	11,000 m <sup>2</sup> /h
<b>Grass bag capacity:</b>	Optional 210 l
<b>Engine:</b>	Kawasaki, V-TWIN dual cylinder
<b>Engine displacement:</b>	726 cm <sup>3</sup>
<b>Drive:</b>	Hydrostatic with differential lock
<b>Cutting height adjustment:</b>	12 positions

Kawasaki is a registered trademark of Kawasaki Heavy Industries, Ltd.



**MAXIMUM STRENGTH AND POWER  
FOR THE TOUGHEST TASKS**

Designed to meet the toughest and most demanding conditions, driven by true power packages and equipped with ultra-strong components – the Cub Cadet XT3 ENDURO SERIES are the ultimate lawn tractors. Brimming with power, capable of mowing dense grass and transporting larger loads including a mechanical differential lock that provides optimum traction however tough the terrain.

## XT1 OS96

## XT1 OS107

ENGINE		
Engine type	Cub Cadet	Cub Cadet
Engine displacement	547 cm <sup>3</sup>	547 cm <sup>3</sup>
Rated power	9.0 kW / 2,300 min <sup>-1</sup>	9.0 kW / 2,250 min <sup>-1</sup>
Cylinders	Single	Single
Tank volume (capacity)	11.4 l	11.4 l
DRIVE SYSTEM		
Transmission	Hydrostatic	Hydrostatic
Speeds	Stepless (f/r)	Stepless (f/r)
Control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard
CUTTING SYSTEM		
Mowing area in m <sup>2</sup> h	6,000	8,000
Cutting width	96 cm / 38"	107 cm / 42"
Cutting height (min-max)	25–100 mm	25–100 mm
Cutting deck	Stamped	Stamped
Number of blades	2	2
Deck engagement	Electric PTO	Electric PTO
Deck height positions	12 positions	12 positions
Deck wheels	2 balls deck wheels	2 balls deck wheels
Wash nozzle/Mulch Kit/mulching blades	–/Standard/Standard	Standard/Standard/ Standard
DISCHARGE SYSTEM		
Bag (capacity)/accessory no.	Optional 200 l/(OEMR190-180A)	Optional 200 l/(19A30030100)
Bag lever/hardtop	–/–	–/–
Bag fill indicator/grass deflector	–/Standard	–/Standard
FRAME		
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Standard	Standard
Turning circle	TIGHT TURN 38 cm	TIGHT TURN 38 cm
Wheel size (f/r in inch)	15 x 6 / 20 x 8	15 x 6 / 20 x 8
Wheel bearings	Sleeve bearings	Sleeve bearings
Frame	Robotically-welded	Robotically-welded
ELECTRIC		
Headlights	LED	LED
COMFORT		
Seat type	Cut & Sew, high back rest	Cut & Sew, high back rest
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	Ergonomic with gentle touch	Ergonomic with gentle touch
Toolbox/Cupholder	Standard/Standard	Standard/Standard
Mow-in-reverse	Standard	Standard
DIMENSIONS		
Vibration value body/K-factor	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	175 cm / 124 cm / 110 cm	175 cm / 134 cm / 110 cm
Net weight	195 kg	195 kg

## XT1 OR95

## XT1 OR106

ENGINE		
Engine type	Cub Cadet	Cub Cadet
Engine displacement	547 cm <sup>3</sup>	547 cm <sup>3</sup>
Rated power	6.2 kW / 2,100 min <sup>-1</sup>	6.6 kW / 2,250 min <sup>-1</sup>
Cylinders	Single	Single
Tank volume (capacity)	11.4 l	11.4 l
DRIVE SYSTEM		
Transmission	Hydrostatic	Hydrostatic
Speeds	Infinitely variable	Infinitely variable
Control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard
CUTTING SYSTEM		
Mowing area in m <sup>2</sup> h	5,500	7,500
Cutting width	95 cm / 38"	106 cm / 42"
Cutting height (min-max)	25–100 mm	25–100 mm
Cutting deck	Stamped	Stamped
Number of blades	2	2
Deck engagement	Electric PTO	Electric PTO
Deck height positions	12 positions	12 positions
Deck wheels	2 balls deck wheels	4 balls deck wheels
Wash nozzle/Mulch Kit/mulching blades	Standard/(196-551-000)/(196-561-000)	Standard/(196-550-000)/(196-560-000)
DISCHARGE SYSTEM		
Bag (capacity)/accessory no.	320 l/ (196-555-603 Anti-Dust-System)	320 l/ (196-555-603 Anti-Dust-System)
Bag lever/hardtop	Rounded ergo telescopic handle/Plastic	Rounded ergo telescopic handle/Plastic
Bag fill indicator/grass deflector	With Blade Shutoff/(196-552A000)	With Blade Shutoff/(196-552A000)
FRAME		
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Standard	Standard
Turning circle	TIGHT TURN 38 cm	TIGHT TURN 38 cm
Wheel size (f/r in inch)	15 x 6 / 18 x 8.5	15 x 6 / 18 x 8.5
Wheel bearings	Sleeve bearings	Sleeve bearings
Frame	Robotically-welded	Robotically-welded
ELECTRIC		
Headlights	LED	LED
COMFORT		
Seat type	Cut & Sew, high back rest	Cut & Sew, high back rest
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	Ergonomic with gentle touch	Ergonomic with gentle touch
Toolbox/Cupholder	Standard/Standard	Standard/Standard
Mow-in-reverse	Standard	Standard
DIMENSIONS		
Vibration value body/K-factor	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>
K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	245 cm / 100 cm / 118 cm	245 cm / 110 cm / 118 cm
Net weight	215 kg	258 kg

	XT2 PR95	XT2 QR106	XT2 PS107
<b>ENGINE</b>			
Engine type	Kawasaki	Kawasaki	Kawasaki
Engine displacement	603 cm <sup>3</sup>	726 cm <sup>3</sup>	603 cm <sup>3</sup>
Rated power	9.3 kW / 2,150 min <sup>-1</sup>	11.6 kW / 2,200 min <sup>-1</sup>	10.4 kW / 2,300 min <sup>-1</sup>
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	11.4 l	11.4 l	11.4 l
<b>DRIVE SYSTEM</b>			
Transmission	Hydrostatic	Hydrostatic	Hydrostatic
Speeds	Infinitely variable	Infinitely variable	Infinitely variable
Control	Foot pedal control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard	Standard
<b>CUTTING SYSTEM</b>			
Mowing area in m <sup>2</sup> h	6,000	8,000	8,500
Cutting width	95 cm / 38"	106 cm / 42"	107 cm / 42"
Cutting height (min-max)	25–100 mm	25–100 mm	25–100 mm
Cutting deck	Stamped	Stamped	Stamped
Number of blades	2	2	2
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	12 positions	12 positions	12 positions
Deck wheels	2 balls deck wheels	4 balls deck wheels	2 balls deck wheels
Wash nozzle/Mulch Kit/mulching blades	Standard/(196-551-000)/(196-561-000)	Standard/(196-550-000)/(196-560-000)	Standard/Standard/Standard
<b>DISCHARGE SYSTEM</b>			
Bag (capacity)/accessory no.	320 l / (196-555-603 Anti-Dust-System)	320 l / (196-555-603 Anti-Dust-System)	Optional 200 l/(19A30030100)
Bag lever/hardtop	Rounded ergo telescopic handle/Plastic	Rounded ergo telescopic handle/Plastic	–/–
Bag fill indicator/grass deflector	With Blade Shutoff/(196-552A000)	With Blade Shutoff/(196-552A000)	–/Standard
<b>FRAME</b>			
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Standard, yellow	Standard, yellow	Standard, yellow
Turning circle	TIGHT TURN xTREME 17 cm	TIGHT TURN xTREME 17 cm	TIGHT TURN xTREME 17 cm
Wheel size (f/r in inch)	15 x 6 / 18 x 8.5	15 x 6 / 18 x 8.5	15 x 6 / 20 x 8
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Frame	Robotically-welded	Robotically-welded	Robotically-welded
<b>ELECTRIC</b>			
Headlights	LED	LED	LED
<b>COMFORT</b>			
Seat type	Cut & Sew, high back rest	Cut & Sew, high back rest	Cut & Sew, high back rest
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	Ergonomic with gentle touch	Ergonomic with gentle touch	Ergonomic with gentle touch
Toolbox/Cupholder	Standard/Standard	Standard/Standard	Standard/Standard
Mow-in-reverse	Standard	Standard	Standard
<b>DIMENSIONS</b>			
Vibration value body/K-factor	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	250 cm / 100 cm / 118 cm	250 cm / 110 cm / 118 cm	180 cm / 134 cm / 100 cm
Net weight	215 kg	253 kg	210 kg

	XT2 PS117	XT2 QS117	XT2 ES107
<b>ENGINE</b>			
Engine type	Cub Cadet	Kawasaki	Cub Cadet 56 V / 60 Ah / 3,000 Wh
Engine displacement/Output Watts (only XT2 ES107)	679 cm <sup>3</sup>	726 cm <sup>3</sup>	2.94 kW
Rated power	11.9 kW / 2,500 min <sup>-1</sup>	12.7 kW / 2,500 min <sup>-1</sup>	2.94 kW / 2,100 min <sup>-1</sup>
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder	–
Tank volume (capacity)	11.4 l	11.4 l	–
<b>DRIVE SYSTEM</b>			
Transmission	Hydrostatic	Hydrostatic	Electric drive
Speeds	Infinitely variable	Infinitely variable	Infinitely variable
Control	Foot pedal control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard	Standard
<b>CUTTING SYSTEM</b>			
Mowing area in m <sup>2</sup> h	9,000	9,000	8,000
Cutting width	117 cm / 46"	117 cm / 46"	107cm / 42"
Cutting height (min-max)	25–100 mm	25–100 mm	25–100 mm
Cutting deck	Stamped	Welded mowing deck	Stamped
Number of blades	2	2	2
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	12 positions	12 positions	12 positions
Deck wheels	4 balls deck wheels	4 balls deck wheels	2 balls deck wheels
Wash nozzle/Mulch Kit/mulching blades	Standard/Standard/Standard	Standard/Standard/Standard	–/Standard/–
<b>DISCHARGE SYSTEM</b>			
Bag (capacity)/accessory no.	Optional 200 l/(19A30030100)	Optional 200 l/(19A30030100)	Optional 200 l/(19A30030100)
Bag fill indicator/grass deflector	–/Standard	–/Standard	–/Standard
<b>FRAME</b>			
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Standard, yellow	Standard, yellow	Standard, blue / –
Turning circle	TIGHT TURN xTREME 17 cm	TIGHT TURN xTREME 17 cm	TIGHT TURN xTREME 17 cm
Wheel size (f/r in inch)	15 x 6 / 20 x 8.5	15 x 6 / 20 x 8.5	15 x 6 / 20 x 8
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Frame	Robotically-welded	Robotically-welded	Robotically-welded
<b>ELECTRIC</b>			
Headlights	LED	LED	LED
<b>COMFORT</b>			
Seat type	Cut & Sew, high back rest	Cut & Sew, high back rest	Cut & Sew, high back rest
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	Ergonomic with gentle touch	Ergonomic with gentle touch	Ergonomic with gentle touch
Toolbox/Cupholder	Standard/Standard	Standard/Standard	Standard/Standard
Mow-in-reverse	Standard	Standard	Standard
USB Port	–	–	Standard
<b>DIMENSIONS</b>			
Vibration value body/K-factor	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	180 cm / 146 cm / 110 cm	180 cm / 144 cm / 110 cm	180 cm / 115 cm / 120 cm
Net weight	215 kg	230 kg	245 kg

## XT3 QS127

## XT3 QS137

ENGINE		
Engine type	Kawasaki	Kawasaki
Engine displacement	726 cm <sup>3</sup>	726 cm <sup>3</sup>
Rated power	15.0 kW / 2,800 min <sup>-1</sup>	16.2 kW / 3,000 min <sup>-1</sup>
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	11.4 l	11.4 l
DRIVE SYSTEM		
Transmission	Hydrostatic, with differential lock	Hydrostatic, with differential lock
Speeds	Infinitely variable	Infinitely variable
Control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard
CUTTING SYSTEM		
Mowing area in m <sup>2</sup> h	10,000	11,000
Cutting width	127 cm / 50"	137 cm / 54"
Cutting height (min-max)	25–100 mm	25–100 mm
Cutting deck	Stamped	Welded mowing deck
Number of blades	3	3
Deck engagement	Electric PTO	Electric PTO
Deck height positions	12 positions	12 positions
Deck wheels	4 balls deck wheels	4 balls deck wheels
Wash nozzle/Mulch Kit/ mulching blades	Standard/Standard/ Standard	Standard/Standard/ Standard
DISCHARGE SYSTEM		
Bag (capacity)/accessory no.	Optional 210 l/(19A30018100)	Optional 210 l/(19A30018100)
Bag lever/hardtop	–/–	–/–
Bag fill indicator/grass deflector	–/Standard	–/Standard
FRAME		
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Bull Bar	Bull Bar
Turning circle	TIGHT TURN xTREME 17 cm	TIGHT TURN xTREME 17 cm
Wheel size (f/r in inch)	16 x 6.5-8 / 22 x 9.5	16 x 6.5-8 / 22 x 9.5
Wheel bearings	Ball bearings	Ball bearings
Frame	Robotically-welded	Robotically-welded
ELECTRIC		
Headlights	LED	LED
COMFORT		
Seat type	Cut & sew, high back rest, with armrests	Cut & sew, high back rest, with armrests
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	Ergonomic with gentle touch	Ergonomic with gentle touch
Toolbox/Cupholder	Standard/Standard	Standard/Standard
Mow-in-reverse	Standard	Standard
DIMENSIONS		
Vibration value body/K-factor	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	197 cm / 155 cm / 110 cm	197 cm / 167 cm / 110 cm
Net weight	260 kg	270 kg



# LAWN TRACTOR ACCESSORIES

The range of Cub Cadet accessories will help with your gardening requirements and means you can use your lawn tractor all year round.

	<b>STEEL CARGO CARRYING PLATFORM FOR XT SERIES SIDE DISCHARGER</b>	<ul style="list-style-type: none"> <li>• Foldable vertically and lockable in place</li> <li>• Easy to install thanks to the FastAttach™ System</li> <li>• Max. weight: 36 kg</li> <li>• Suitable for XT Series side-dischargers</li> </ul>	Part number: 19A30029100
	<b>ELECTRIC SPREADER FOR XT SERIES SIDE DISCHARGER</b>	<ul style="list-style-type: none"> <li>• Easy to install thanks to the FastAttach™ System</li> <li>• Can be switched on/off from the driver's seat</li> <li>• Capacity: 45 kg</li> <li>• Suitable for XT Series side-dischargers</li> </ul>	Part number: 19A30028100
<b>MULCH KITS</b>			
	Mulch Kit (without blades) for model LT1 NS96 and LT2 NS96		Part number: OEM-190-116
	Mulch Kit (without blades) for models LT1 NR92, LT2 NR92 and LT3 PR105		Part number: 196-749A678
	Mulch Kit (without blade) for models XT1 OR106, XT2 QR106, XT2 PR106ie and XT3 QR106, optional mulching blades available (196-560-000)		Part number: 196-550-000
	Mulch Kit (without blade) for models XT1 OR95, XT2 PR95 and XT3 QR95, optional mulching blades available (196-561-000)		Part number: 196-551-000
<b>AGRICULTURAL TYRES</b>			
	Chevron style rear wheels 18" x 9,5". Set consists of 2 cpl. wheels. Fits all tractors with either 18" or 20" rear wheels. Not approved for XT3 models.		Part number: 196-721A678
<b>GRASS BAGS</b>			
	Anti-Dust-System for 360 l grass collection system, XT3 Series		Part number: 196-553-603
	Anti-Dust-System for 320 l grass collection system, XT1 and XT2 Series		Part number: 196-555-603
	Twin bagger, 200 l, for 96 cm / 107 cm decks of LT Series (models - 2022)		Part number: OEM-190-180A
	Twin bagger, 200 l, for 96 cm decks of XT Series (models - 2022)		Part number: OEMR190-180A
	Twin bagger for side discharge lawn tractors, 229 l, for 92 cm decks (model year 2023-), e.g. LT1 NS92, LT2 NS92, with flexible tube and sight window		Part number: 19A30045OEM
	Twin bagger for side discharge lawn tractors 229 l, for 107 cm decks (model year 2023-), e.g. LT3 PS107 with flexible tube and sight window		Part number: 19A30031OEM
	Twin bagger for 200 l, for 107 / 117 cm, with variable tube, inspection window and FastAttach™ System, for decks of XT Series		Part number: 19A30030100
	Triple bagger 210 l, for 127 / 137 cm decks of XT Series		Part number: 19A30018100
<b>ADDITIONAL ACCESSORIES</b>			
Battery charger for LR, LT and XT Series	Part number: 196-967-678	Electrical grass catcher emptying mechanism for XT Series rear discharger system. Suitable for 2018+ models.	Part number: 196-570-600

		<b>FRONT BUMPER</b>	
Front bumper Kit with FastAttach™ fits all LT Series lawn tractors		Part number: OEM-190-679	
		Front Bumper Bull Bar, XT Series	
		Part number: 196-564-000	
		<b>DEFLECTORS</b>	
Rear deflector for all XT Series rear-discharger models		Part number: 196-552A000	
		Rear deflector for LT Series rear-discharger models	
		Part number: 196-750A678	
		<b>LAWN TRACTOR COVER</b>	
Size XL: for large-sized and rear discharge lawn tractors		Part number: 19A19021603	
		<b>SNOW CHAINS</b>	
For 20" x 8.0" wheels incl. adapter		Part number: 196-658-699	
For 18" x 8.5" wheels incl. adapter		Part number: 490-241-0022	
For XT 22" x 9", 5" x 12" and 23" x 9", 5" x 12" wheels		Part number: 490-241-0025	
		<b>DOZER BLADE AND RUBBER LIP</b>	
117 cm dozer blade for LT Series		Part number: OEM-190-833	
Rubber lip – universal – for all dozer blades		Part number: 196-718-678	
117 cm dozer blade for LT und XT Series		Part number: 19A30017OEM	
<b>ADDITIONAL ACCESSORIES</b>			
Rear hitch for LT series with rear discharge	Part number: 196-399-000	Mulch Blades for 106cm XT1, XT2, XT3 direct collect	Part number: 196-560-000
		Mulch Blades for 95cm XT1, XT2, XT3 direct collect	Part number: 196-561-000



# MASSIVE POWER, ZERO-TURN

FIND OUR ALL NEW XZ8  
ON PAGE 95

## ZERO-TURNS

Cub Cadet, the proven innovator of zero-turn technology, has created our strongest line up of zero-turn riders. Our leading 360° turning technology lets you easily mow around obstacles with incredible confidence, making every mowing manoeuvre more efficient. And with models that feature four-wheel steering, you enjoy increased stability, control and faster cutting time.

## XZ3 ENDURO SERIES™



### ZERO-TURNS. INFINITE STRENGTH.

High-performance meets practicality.

The Cub Cadet XZ3 122 has a heavy-duty, fabricated 122 cm / 48" deck with the versatility to mow around fences and trees. The easy-to-see centrally mounted deck maximises mowing accuracy in corners and under low obstacles. A low centre of gravity and wide wheelbase allow the machine to glide over uneven ground and still cut in a completely straight line across hills and slopes. Tough terrain and steep hills are no problem with this added traction and control.

The advanced mulching technology incorporated in this machine re-circulates the airflow around the cutting deck delivering effective and efficient mulching capabilities. A superior mulcher.



WITH STEERING WHEEL TECHNOLOGY




### HYDROSTATIC

#### DUAL HYDROSTATIC TRANSMISSION

The dual hydrostatic transmission provides you with optimal manoeuvrability. Available on the XZ Series and Pro Z Series.

### SYNCHRO STEER® TECHNOLOGY

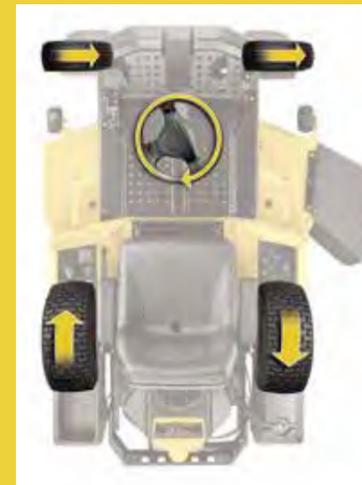

#### UNBEATABLE MANOEUVRABILITY AND UNMATCHED CLIMBING ABILITY

Our unique Zero-Turn riders with a traditional steering wheel provide you with the amazing manoeuvrability of a conventional Zero-Turn but with full control of the front wheels.

Steering and drive are perfectly synchronised to ensure the exact speed and rotating direction of each rear wheel, whatever the position of the front wheels. This revolutionary technology is available for the XZ3 and XZ6 Series.



#### XZ3 122

Cutting width:	122 cm / 48"
Mowing area:	11,000 m <sup>2</sup> /h
Grass bag capacity:	300 l optional
Engine:	Kawasaki OHV, V-TWIN dual cylinder
Engine displacement:	726 cm <sup>3</sup>
Drive:	Dual Hydrostatic
Cutting height adjustment:	15 positions

### KEY BENEFITS



#### ADJUSTABLE STEERING COLUMN

The XZ3 is equipped with an adjustable steering column ensuring you find the perfect position.



#### PNEUMATIC FRONT WHEELS

Controllable pneumatic front wheels which support the Zero-Turn of your XZ3.



#### STEERING WHEEL

A soft grip steering wheel for great control in tough conditions.



#### FLOATING CUTTING DECK

The floating deck follows the contours of the ground for superior cutting, providing a smoother and more uniform look.



#### COMFORTABLE SEAT WITH ARMRESTS

The high-back seat with armrests ensures that your work will be done in comfort.



#### ROUNDED MOWING DECK ROLLERS

Prevent damage to the turf when cornering tight bends.



#### LARGE SIDE EJECTION DEFLECTOR


Helps spread the cuttings over a large area.

**XZ5**  
ENDURO SERIES®




**ENJOY YOUR PRECISE CONTROL**


Our lap-bar technology combined with the robust construction consisting of heavy-duty components and high-performance engines help make the XZ5 Series the ideal solution for large lawn areas.



DRIVING FORWARD




TURNING TO THE RIGHT



TURNING TO THE LEFT



DRIVING REVERSE



EXECUTING A ZERO-TURN

**POWERFUL ENGINES**

Driven by powerful Cub Cadet or Kawasaki engines, the XZ5 models reach speeds of up to 12 km/h.

**LOW VIBRATION**

With soft grips and rubber floor mats.

**LARGE TYRES FOR GOOD TRACTION**

The tyres of the XZ5 127 and XZ5 137 models help provide traction. They also offer stability and control.

**INDIVIDUALLY ADJUSTABLE SEAT**

With high back and armrests for comfort and to help minimize fatigue.

**BRIGHT LED HEADLIGHTS**

Helps provide visibility in poor lighting conditions, e.g. at dawn and dusk.

**RUGGED MOWING DECKS**

The XZ5 models have an robust steel mowing deck and a lightweight tubular steel frame.



**FOOT CONTROLLED DECK LIFT**

Adjust the mowing height in 15 steps with the convenient rotary knob.

**MODELS AVAILABLE**



**XZ5 L107**

Cutting width:	107 cm / 42"
Mowing area:	10,000 m <sup>2</sup> /h
Grass bag capacity:	Optional 230 l
Engine:	Cub Cadet, V-Twin dual cylinder
Engine displacement:	679 cm <sup>3</sup>
Drive:	Dual Hydrostatic
Cutting height adjustment:	15 positions



**XZ5 L127**

Cutting width:	127 cm / 50"
Mowing area:	11,500 m <sup>2</sup> /h
Grass bag capacity:	Optional 230 l
Engine:	Kawasaki OHV, V-Twin dual cylinder
Engine displacement:	726 cm <sup>3</sup>
Drive:	Dual Hydrostatic
Cutting height adjustment:	15 positions



**XZ5 L137**

Cutting width:	137 cm / 54"
Mowing area:	12,500 m <sup>2</sup> /h
Grass bag capacity:	Optional 230 l
Engine:	Kawasaki OHV, V-Twin dual cylinder
Engine displacement:	726 cm <sup>3</sup>
Drive:	Dual Hydrostatic
Cutting height adjustment:	15 positions

Kawasaki is a registered trademark of Kawasaki Heavy Industries, Ltd.

**XZ5**  
ENDURO SERIES®



**NEW**

**THE ULTIMATE MOWING EXPERIENCE - ELECTRIFYING...**

With the new Cub Cadet XZ5 EL107, we add an electric, quiet and low maintenance alternative to our range of Zero-Turn mowers. With the 56V Li-ION battery and the 107cm / 42" mowing deck you are well equipped even in challenging terrain. It comes with a 3-year warranty on the battery and the mower.



MOWING TIME  
90 MIN\*  
4 HOURS  
CHARGING TIME

**NEW**



XZ5 EL107	
Cutting width:	107 cm / 42"
Area performance (rec.):	10,000 m <sup>2</sup> /h
Collecting volume:	Optional 230 l
Engine:	Cub Cadet 56 V / 60 Ah / 3,000 Wh
Drive:	Electric drive
Cutting height adjustment:	15 positions

\*When fully charged. Deviations are possible depending on lawn and weather conditions, and grass thickness.



**5**  
ZERO-TURNS



# XZ6

## ENDURO SERIES®



## SYNCHRO STEER® TECHNOLOGY

### GOOD MANOEUVRABILITY AND SLOPE HANDLING

The Cub Cadet Synchro Steer® Technology is the next step of the evolution of the Zero-Turn technique. Our unique Zero-Turn riders with a traditional steering wheel provide you with the amazing manoeuvrability of a conventional Zero-Turn but retaining control of the front wheels. Steering and drive are synchronized to help control the speed and rotation direction of each rear wheel, whatever the position of the front wheels. This technology is available for the XZ3, XZ6 and the new XZ8 Series.



## STEERING THE WAY FORWARD

High-performance meets practicality for one strong rider. The industry's first Zero-Turn system with steering wheel control and four-wheel steering for strength and stability. From the power of a professional-grade engine to its efficiency and durability, designed for each mow to be as strong as the last.

- ADJUSTABLE STEERING COLUMN**
- COMFORTABLE SEAT WITH ARMRESTS**
- BRIGHT LED HEADLIGHTS**  
Helps provide visibility in poor lighting conditions, e.g. at dawn and dusk.
- ROBUST TUBULAR STEEL FRAME**
- SOLID, WELDED MOWER DECKS**  
For high durability and robustness.
- PNEUMATIC CASTER WHEELS**  
Controllable pneumatic front caster wheels which support the Zero-Turn of your XZ.
- CLEAN CUT**  
The floating deck follows ground contours for excellent cutting and a smooth and uniform look.



### XZ6 S107

Cutting width:	107cm / 42"
Mowing area:	10,000 m <sup>2</sup> /h
Engine:	Cub Cadet V-Twin dual cylinder
Engine displacement:	679cm <sup>3</sup>
Drive:	Dual Hydrostatic
Cutting height adjustment:	15 positions
Deck wheels:	2 front



### XZ6 S117

Cutting width:	117cm / 46"
Mowing area:	10,500 m <sup>2</sup> /h
Engine:	Kawasaki V-Twin dual cylinder
Engine displacement:	726cm <sup>3</sup>
Drive:	Dual Hydrostatic
Cutting height adjustment:	15 positions
Deck wheels:	2 front



### XZ6 S127

Cutting width:	127cm / 50"
Mowing area:	11,500 m <sup>2</sup> /h
Engine:	Kawasaki V-Twin dual cylinder
Engine displacement:	726cm <sup>3</sup>
Drive:	Dual Hydrostatic
Cutting height adjustment:	15 positions
Deck wheels:	2 front and 1 nose


Kawasaki is a registered trademark of Kawasaki Heavy Industries, Ltd.

# XZ7

## ENDURO SERIES®

## DESIGNED FOR YOUR CHALLENGES

The XZ7 Series makes a great impression with its improved stability and durability. You can easily mow with high comfort even under the tough conditions.



**TOP SPEED**  
With a top speed of up to 14,5 km/h, you can mow even large areas in no time.



**BRIGHT LED HEADLIGHTS**  
Helps provide visibility in poor lighting conditions, e.g. at dawn and dusk.

### VERSATILITY

In addition to the included mulching kit the standard rear hitch gives you the option to combine your XZ7 with a wide variety of accessories.

### ROBUST MOWING DECK

The robust tubular steel frame as well as the welded, all-round reinforced AeroForce Max™ mowing deck provides the necessary strength for a consistently high cut quality.



### XZ7 L122 - ULTIMA

Cutting width:	122cm / 48"
Area performance (rec.):	11,000 m <sup>2</sup> /h
Collecting volume:	Optional 380 l
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	726 cm <sup>3</sup>
Drive:	Dual Hydrostatic
Cutting height adjustment:	16 positions



### XZ7 L152i - ULTIMA

Cutting width:	152cm / 60"
Area performance (rec.):	15,000 m <sup>2</sup> /h
Collecting volume:	Optional 380 l
Engine:	KOHLER EFI, V-TWIN dual cylinder
Engine displacement:	747 cm <sup>3</sup>
Drive:	Dual Hydrostatic
Cutting height adjustment:	16 positions

**ROLLOVER PROTECTION**  
Fully welded tubular steel frame as standard equipment.



**HIGH COMFORT**  
The premium seat with a high backrest has padded armrests and special cushioning.

**FOOT CONTROLLED DECK LIFT**  
Adjust the mowing height in 16 steps with the convenient rotary knob.

**SPRING-MOUNTED FRONT-WHEEL SUSPENSION**  
The individually-suspended wheels help for a smooth ride with less vibration, even on difficult lawns.



### DURABILITY

We trust our new XZ8 models with high durability and robustness and offer a warranty of 3 years or up to 500 working hours\* – for commercial or private use. \*Whichever comes first

Kawasaki is a registered trademark of Kawasaki Heavy Industries, Ltd.

**XZ8**  
ENDURO SERIES®

**NEW**

**CONQUER THE HILLS!**

Steering wheel control is something we all are familiar with. The concept of maintaining your terrain from a comfortable and solid position is the basis of the innovative Synchro Steer® Technology we offer exclusively for our Zero-Turn mowers. The new XZ8 series is engineered to mow your lawn precisely and help prevent turf damage – even on sloping terrain. With its robust steel frame and its durable design you can now feel even more confident on challenging terrains.



**SYNCHRO STEER® TECHNOLOGY**

**GOOD MANOEUVRABILITY AND SLOPE HANDLING**

The Cub Cadet Synchro Steer® Technology is the next step of the evolution of the Zero-Turn technique. Our unique Zero-Turn riders with a traditional steering wheel provide you with the amazing manoeuvrability of a conventional Zero-Turn but retaining control of the front wheels. Steering and drive are synchronized to help control the speed and rotation direction of each rear wheel, whatever the position of the front wheels. This technology is available for the XZ3, XZ6 and the new XZ8 Series.



**ROLLOVER PROTECTION**

Fully welded tubular steel frame already as standard equipment.

**TUBULAR STEEL FRAME**

Designed for high durability and a long lifetime.

**FABRICATED MOWING DECKS**

Designed for high performance and resistance.

**PREMIUM HIGH BACK SEAT**

Offers high comfort.

**FOOT CONTROLLED DECK LIFT**

Adjust the mowing height in 16 steps with the convenient rotary knob.

**HYDRO DRIVE SYSTEM**

Helps provide a smooth mowing experience.



**XZ8 S122 - ULTIMA**

Cutting width:	122 cm / 48"
Lawn area (rec.):	11,000 m <sup>2</sup> /h
Collecting volume:	Optional 380 l
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	726 cm <sup>3</sup>
Drive:	Dual Hydrostatic, Hydrogear ZT3100
Cutting height adjustment:	16 positions



**XZ8 S137i - ULTIMA**

Cutting width:	137 cm / 54"
Lawn area (rec.):	13,000 m <sup>2</sup> /h
Collecting volume:	Optional 380 l
Engine:	KOHLER EFI, V-TWIN dual cylinder
Engine displacement:	726 cm <sup>3</sup>
Drive:	Dual Hydrostatic, Hydrogear ZT3200
Cutting height adjustment:	16 positions



**DURABILITY**

We trust our new XZ8 models with high durability and robustness and offer a warranty of 3 years or up to 500 working hours\* – for commercial or private use. \*Whichever comes first

**NEW**

	XZ3 122	XZ5 L107	XZ5 L127	XZ5 L137
<b>ENGINE</b>				
Engine type	Kawasaki OHV	Cub Cadet	Kawasaki OHV	Kawasaki OHV
Engine displacement	726 cm <sup>3</sup>	679 cm <sup>3</sup>	726 cm <sup>3</sup>	726 cm <sup>3</sup>
Rated power	12.3 kW / 2,750 min <sup>-1</sup>	11.4 kW / 2,350 min <sup>-1</sup>	14.7 kW / 2,800 min <sup>-1</sup>	14.7 kW / 2,900 min <sup>-1</sup>
Cylinders	V-TWIN dual cylinder	V-Twin dual cylinder	V-Twin dual cylinder	V-Twin dual cylinder
Tank volume (capacity)	Dual 8.5 litre fuel tanks	13.25 l	13.25 l	13.25 l
Lubrication	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter
<b>DRIVE SYSTEM</b>				
Transmission	Dual Hydrostatic	Dual Hydrostatic	Dual Hydrostatic	Dual Hydrostatic
Control	Dual foot pedal control	Control lever	Control lever	Control lever
Cruise control	Standard	-	-	-
<b>CUTTING SYSTEM</b>				
Mowing area in m <sup>2</sup> /h	11,000	10,000	11,500	12,500
Cutting width	122 cm / 48"	107 cm / 42"	127 cm / 50"	137 cm / 54"
Cutting height (min-max)	25-102 mm	25-115 mm	25-115 mm	25-115 mm
Cutting options	3-in-1 Option	3-in-1 Option	3-in-1 Option	3-in-1 Option
Number of blades	3	2	3	3
Deck engagement	Electric PTO	Electric PTO	Electric PTO	Electric PTO
Deck height positions	15 positions	15 positions	15 positions	15 positions
Deck wheels	2	2	3	3
Wash nozzle/Mulch Kit	Standard/Standard	Standard/Standard	Standard/Standard	Standard/Standard
<b>DISCHARGE SYSTEM</b>				
Bag (capacity in l)/ accessory no.	Triple 300 l optional/ (19A70040100)	Optional 230 l/ (19B70054100)	Optional 230 l/ (19A70055100)	Optional 230 l/ (19A70055100)
Grass deflector	Standard	Standard	Standard	Standard
<b>FRAME</b>				
Front axle	Cast-iron	Steel	Steel	Steel
Front bumper/rear bumper	Standard/-	- / Tubular steel frame	- / Tubular steel frame	- / Tubular steel frame
Turning circle	0 cm	0 cm	0 cm	0 cm
Wheel size (f/r in inch)	13 x 5 / 20 x 10	11 x 6 / 20 x 8	11 x 6 / 20 x 10	13 x 6.5 / 20 x 12
Wheel bearings	Ball-bearings	-	-	-
<b>ELECTRICAL SYSTEM</b>				
Battery	12 V / 230 CCA	12 V / 230 CCA	12 V / 230 CCA	12 V / 230 CCA
Headlights	-	LED	LED	LED
Hour metre/service minder	Standard	-	-	Standard
Safety systems	Standard	Standard	Standard	Standard
<b>COMFORT</b>				
Seat type	High back with armrests and gel suspension	High back, with armrests	High back with armrests	High back with armrests
Seat adjustment	Quick adjuster lever	Quick adjuster lever	Quick adjuster lever	Quick adjuster lever
Steering wheel	Soft-Grip, adjustable steering column	2-way adjustable lap bars with comfort grips	2-way adjustable lap bars with comfort grips	2-way adjustable lap bars with comfort grips
Utility bin	Standard	Standard	Standard	Standard
Mow-in-reverse	Standard	Standard	Standard	Standard
<b>DIMENSIONS</b>				
Vibration value body/K-factor	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	194 cm / 124 cm / 118 cm	203 cm / 132 cm / 114 cm	203 cm / 155 cm / 114 cm	203 cm / 164 cm / 117 cm
Net weight	312 kg	267 kg	285 kg	312 kg

	XZ5 EL107	XZ6 S107	XZ6 S117	XZ6 S127
<b>ENGINE</b>				
Engine type	Cub Cadet 56 V / 60 Ah / 3,000 Wh	Cub Cadet	Kawasaki	Kawasaki
Engine displacement	-	679 cm <sup>3</sup>	726 cm <sup>3</sup>	726 cm <sup>3</sup>
Rated power	2,083 min <sup>-1</sup>	11.9 kW / 2,500 min <sup>-1</sup>	13.8 kW / 2,450 min <sup>-1</sup>	14.5 kW / 2,800 min <sup>-1</sup>
Cylinders	-	V-TWIN dual cylinder	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	-	13.25 l	13.25 l	13.25 l
Lubrication	-	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter
<b>DRIVE SYSTEM</b>				
Transmission	Electric Drive	Dual Hydrostatic	Dual Hydrostatic	Dual Hydrostatic
Control	Foot pedal control	Dual foot pedal control	Dual foot pedal control	Dual foot pedal control
Cruise control	-	-	-	-
<b>CUTTING SYSTEM</b>				
Mowing area in m <sup>2</sup> /h	10,000	10,000	10,500	11,500 m <sup>2</sup> /h
Cutting width	107 cm / 42"	107 cm / 42"	117 cm / 46"	127 cm / 50"
Cutting height (min-max)	25-114 mm	25-114 mm	25-114 mm	25-114 mm
Cutting options	3-in-1 Option	3-in-1 Option	3-in-1 Option	3-in-1 Option
Number of blades	2	2	2	3
Deck engagement	Electric PTO	Electric PTO	Electric PTO	Electric PTO
Deck height positions	15 positions	15 positions	15 positions	15 positions
Deck wheels	2	2	2	3
Wash nozzle/Mulch Kit	-/Standard	-/Standard	-/Standard	-/Standard
<b>DISCHARGE SYSTEM</b>				
Bag (capacity in l)/ accessory no.	Optional 230 l/ (19A70054100)	Optional 230 l/ (19B70054100 + 490-950-C062)	Optional 230 l/ (19B70054100 + 490-950-C062)	Optional 230 l/ (19B70055100 + 490-950-C062)
Grass deflector	Standard	Standard	Standard	Standard
<b>FRAME</b>				
Front axle	Steel	Steel	Steel	Steel
Front bumper/rear bumper	Upper Tube Sub Frame	- / -	- / -	- / -
Turning circle	0 cm	0 cm	0 cm	0 cm
Wheel size (f/r in inch)	11 x 6 / 20 x 8	13 x 6.5 / 20 x 8	13 x 6.5 / 20 x 10	13 x 6.5 / 20 x 12
Wheel bearings	-	Sleeve bearings	Sleeve bearings	Ball-bearings
<b>ELECTRICAL SYSTEM</b>				
Battery	56V	12 V / 230 CCA	12 V / 230 CCA	12 V / 230 CCA
Headlights	LED	LED	LED	LED
Hour metre/service minder	-	Standard	Standard	Standard
Safety systems	-	Standard	Standard	Standard
<b>COMFORT</b>				
Seat type	Cut and sew, high back rest	High back with arm rests	High back with arm rests	High back with arm rests
Seat adjustment	Lever	Quick adjuster lever	Quick adjuster lever	Quick adjuster lever
Steering wheel	2-way adjustable lap bars with comfort grips	Soft-Grip steering wheel, tilt steering column	Soft-Grip steering wheel, tilt steering column	Soft-Grip steering wheel, tilt steering column
Utility bin (Toolbox / Cupholder on XZ5 EL107)	Standard	Standard	Standard	Standard
Mow-in-reverse	Standard	Standard	Standard	Standard
<b>DIMENSIONS</b>				
Vibration value body/K-factor	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	203 cm / 132 cm / 114 cm	203 cm / 132 cm / 114 cm	203 cm / 126 cm / 114 cm	203 cm / 126 cm / 118 cm
Net weight	236 kg	267 kg	285 kg	312 kg

**NEW**

**NEW**

**XZ7 L122 -  
ULTIMA**

**XZ7 L152i -  
ULTIMA**

**XZ8 S122 -  
ULTIMA**

**XZ8 S137i -  
ULTIMA**

ENGINE				
Engine type	Kawasaki	KOHLER EFI	Kawasaki	KOHLER EFI
Engine displacement	726 cm <sup>3</sup>	747 cm <sup>3</sup>	726 cm <sup>3</sup>	747 cm <sup>3</sup>
Rated power	14.4 kW / 2,700 min <sup>-1</sup>	14.8 kW / 2,700 min <sup>-1</sup>	14.4 kW / 2,700 min <sup>-1</sup>	14.8 kW / 2,700 min <sup>-1</sup>
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	20.8 l	20.8 l	20.8 l	20.8 l
Lubrication	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter	Full-pressure with spin-on oil filter
DRIVE SYSTEM				
Transmission	Dual Hydrostatic	Dual Hydrostatic	Dual Hydrostatic (Hydrogear ZT3100)	Dual Hydrostatic (Hydrogear ZT3200)
Control	Control lever	Control lever	Dual foot pedal control	Dual foot pedal control
Cruise control	-	Standard	-	-
CUTTING SYSTEM				
Lawn area (rec./up to)	11,000 m <sup>2</sup> /h	15,000 m <sup>2</sup> /h	11,000 m <sup>2</sup> /h	13,000 m <sup>2</sup> /h
Cutting width	122 cm / 48"	152cm / 60"	122 cm / 48"	137 cm / 54"
Cutting height (min-max)	25–114 mm	25–114 mm	25–114 mm	25–114 mm
Cutting options	3-in-1 Option	3-in-1 Option	3-in-1 Option	3-in-1 Option
Number of blades	3	3	3	3
Deck engagement	Electric PTO	Electric PTO	Electric PTO	Electric PTO
Deck height positions	16 positions	16 positions	16 positions	16 positions
Deck wheels	2	2 + Nose	2	2
Wash nozzle/Mulch Kit	-/Standard	-/Standard	-/Standard	-/Standard
DISCHARGE SYSTEM				
Bag (capacity in l) / accessory no.	Optional 380 l / (49A70001100)	Optional 380 l / (49A70002100)	Optional 380 l / (49A70001100 + 490-950-C062)	Optional 380 l / (49A70002100 + 490-950-C062)
Grass deflector	Standard	Standard	Standard	Standard
FRAME				
Front axle	Steel, with front wheel suspension	Steel, with front wheel suspension	Steel	Steel
Front bumper/rear bumper	- / Tubular steel frame	- / Tubular steel frame	- / Standard	- / Standard
Turning radius (cm)	0 cm	0 cm	0 cm	0 cm
Wheel size (f/r in inch)	13 x 6.5 / 23 x 12	13 x 6.5 / 24 x 12	13 x 6.5 / 22 x 12	13 x 6.5 / 23 x 12
Wheel bearings	n/a	n/a	-	-
ELECTRICAL SYSTEM				
Battery	12 V / 230 CCA	12 V / 230 CCA	210cca AGM	210cca AGM
Headlights	LED	LED	LED	LED
Hour metre/service minder	Standard	Standard	Standard	Standard
Safety systems	Standard	Standard	Standard	Standard
COMFORT				
Seat type	Premium, high back with armrests, individually adjustable suspension	Premium, high back with armrests, individually adjustable suspension	High back with armrests, individually adjustable suspension	High back with armrests, individually adjustable suspension
Seat adjustment	Quick adjuster lever	Quick adjuster lever	Quick adjuster lever	Quick adjuster lever
Steering wheel	2-way adjustable lap bars with comfort grips	2-way adjustable lap bars with comfort grips	Soft-Grip steering wheel, tilt steering column	Soft-Grip steering wheel, tilt steering column
Utility bin	Standard	Standard	Standard	Standard
Mow-in-reverse	Standard	Standard	Standard	Standard
DIMENSIONS				
Vibration value body/K-factor	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	232 / 145 / 134 cm	233 / 177 / 134 cm	218 / 138 / 121 cm	218 / 153 / 122 cm
Net weight	415 kg	450 kg	436 kg	449 kg

## XZ ACCESSORIES

GRASS BAG	
Twin Bag for XZ3 122	Part number: 19A70040100
Twin Bag for XZ5 L107, XZ6 S107 & XZ6 S117	Part number: 19B70054100
Twin Bag for XZ5 L127, XZ5 L137 & XZ6 S127	Part number: 19B70055100
Triple Bag for XZ7 122	Part number: 49A70001100
Triple Bag for XZ7 152	Part number: 49A70002100
Weight Bracket Kit (to fit XZ6)	Part number: 490-950-C062





# ULTIMATE POWER, FOR PROFESSIONAL REQUIREMENTS.

## BUILT FOR YOUR BUSINESS.

When you are looking to update your commercial mowers the key things to consider are performance, durability and operator comfort.

Our PRO Z series of zero-turns will fulfil all your commercial requirements. Providing a fast, premium quality cut, unmatched user comfort and ultimately built for the long haul. Perfect for the challenging environments you face everyday.

The PRO Z series is our strongest, most efficient line up of zero-turn machines.

LESS DOWNTIME, MORE GO TIME.


# PERFORMANCE AND AMAZING MANOEUVRABILITY.

Our patented SyncroSteer® technology with steering wheel means that inexperienced operators can easily use the steering wheel and Dual Hydrostatic Transmission to control all four wheels, minimising the turf being churned up by the wheels and ensuring the ultimate manoeuvrability – an exclusive offering in the commercial sector.

- ▶ Reduces mowing time by up to 10% compared to lap bar mowers
- ▶ Delivers true zero-turn handling with less overlap and straighter lines
- ▶ Four-wheel steering control ensures unmatched hillside stability and enhanced traction on uneven terrain

## GREATER STABILITY AND CONTROL ON BANKS AND SLOPES

Steering wheel control and a wide stance provide better stability and control on banks and slopes up to 25°.

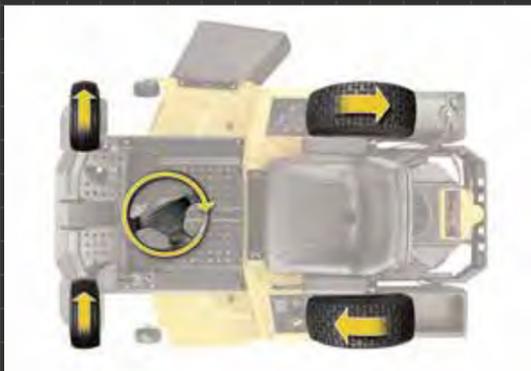

## DUAL HYDROSTATIC TRANSMISSION

The dual hydrostatic transmission ensures the ultimate manoeuvrability and control.




# CUT EVERYTHING INCLUDING DOWNTIME.

The frame and axle on the Z5, Z7 and Z9 powers through the thickest grass in one pass at maximum speeds of up to 12mph meaning you can do the job quicker. High torque commercial transmissions are paired with high horsepower commercial-grade engines to provide optimal and consistent blade speed. A 3" blade overlap ensures a tight, consistent cut. The frame and axle on the Z5 and Z7 float as the machine moves allowing the deck to follow the terrain and stop scalping.

Commercial grade petrol engines rather than diesel from Kohler and Kawasaki provide the consistent power you need to get the job done and maximise your work-day – reducing the downtime which could cost you both time and money. The petrol engines benefit from having lower emissions and reduced fuel usage.

## COMMERCIAL-QUALITY CUT


High-lift Marbain® blades with blade tip speed up to 18,500 fpm

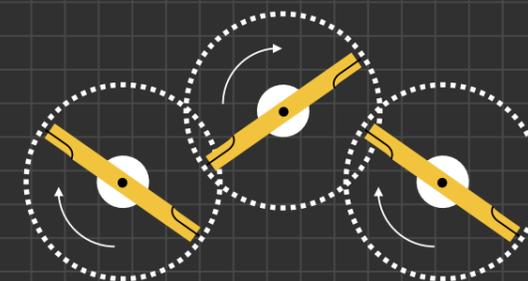

3" total blade overlap (ensures a tight, consistent cut)

## E-COATING


PRO Z mowers are protected with e-coating; a precise, multi-stage process.

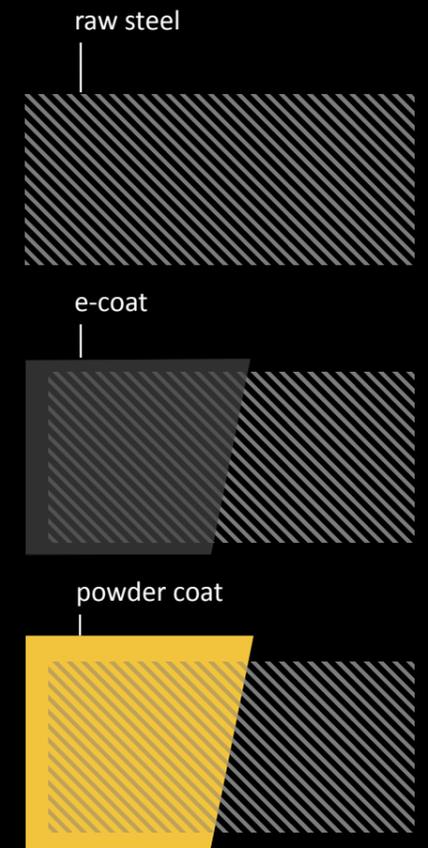



## DURABILITY – HEAVY DUTY

From the frame to the front yoke, every part of the PRO Z is designed to handle serious rigors. The thickness of the cutting deck and the all-around heavy-duty construction will help this Zero-Turn last for the long haul.

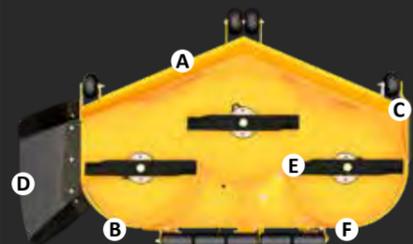

### DURABILITY


- A** 1/4" leading rolled edge
- B** 5/16" steel side reinforcements
- C** 3/4" wear guard

### QUALITY CUT

- D** Flexible rubber discharge chute
- E** High-lift Marbain® blades (with blade tip speed up to 18,500 fpm)
- F** Adjustable rear stripping roller

### BEEFED-UP FRONT END

Designed to absorb the impact of rough terrain with a front-end construction featuring a outstanding combination of axle, hub and yoke size.

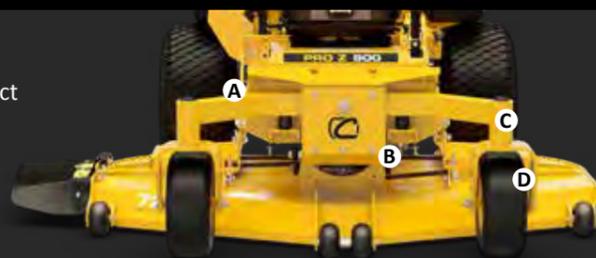

- A** 2" x 3" pivoting front axle
- B** Isolation damping system
- C** 5" steel hubs
- D** 1/2" thick steel front yokes



## COMFORT – WORK HARD. RIDE EASY

The PRO Z can take a beating, but your body shouldn't. Enjoy a smooth ride throughout the day long with the comfort features of the PRO Z Series.



### PRO Z AIR-RIDE SEAT

Our air-ride seat allows riders to adjust the seat firmness to their personal preference.

- A** Isolation damping system under the seat (PRO Z 5/7/9)
- B** Lumbar support
- C** EVC cushion (elastic vibration control)
- D** Angle adjustment
- E** Padded armrests



### PIVOTING FRONT AXLE

A pivoting front axle allows the front end of the PRO Z to negotiate unseen terrain while helping to protect the quality of the cut. The frame and axle float as the PRO Z moves, allowing the deck to follow the terrain profile and minimise scalping.



# Z1 137

The Z1 137 will exceed your expectations, not your budget. Equipped with a powerful cutting deck, it will always produce a commercial-quality cut with landscaper-approved speed, efficiency and comfort.



KOHLER CONFIDANT  
EFI EZT 745

## Z1 137

GREAT PRODUCTIVITY,  
UNBELIEVABLE  
MANOUEVRABILITY.

POWERED BY  
**KOHLER.**

**3 YEARS  
1000 HOURS  
WARRANTY  
PRIVATE &  
BUSINESS**



**A POWER MACHINE**

With its fast speed of up to 9.5mph / 15km/h, the Z1 137 excels in efficiency.

**B MORE COMFORTABLE THAN EVER**

High-comfort seat, suspension and non-slip controls guarantee safe and fatigue-free work.

**C STRONG AND ROBUST**

Welded mowing deck with 137 cm / 54" cutting width for endless power.

**D EXTREMELY AGILE**

The 360° turning radius technology helps you negotiate tight corners and obstacles easily.

Cutting width:	137 cm, 54"
Area performance (rec.):	13,500 m <sup>2</sup> /h
Discharge type:	Side discharge
Engine:	KOHLER Confidant EFI EZT 745, V-TWIN dual cylinder
Engine displacement:	747 cm <sup>3</sup>
Drive:	Dual Hydrostatic
Transmission:	Hydrogear ZT3400
Max. speed:	15 km/h (forward)/7 km/h (reverse), 9.5mph (forward) / 4.5mph (reverse)
Cutting height adjustment:	17 positions
Fuel tank capacity:	2 x 15 litres





KAWASAKI OHV  
V-TWIN DUAL CYLINDER

# Z5 152

Amazing strength and unsurpassed comfort – the perfect combination for true professionals. The Z5 152 maximises your work day with an efficient engine, larger fuel capacity and powerful cutting deck.

## Z5 152

STRENGTH IN EVERY DETAIL.

Powered by  
**Kawasaki**

**3 YEARS  
1000 HOURS  
WARRANTY  
PRIVATE &  
BUSINESS**



- A POWER MACHINE**  
With its fast speed of 10mph / 16km/h, the Z5 152 excels in efficiency.
- B COMFORTABLE MOWING**  
With our high-comfort seat, suspension and non-slip controls.
- C STRONG AND ROBUST**  
Welded mowing deck with 152 cm / 60" cutting width.
- D EXTREMELY AGILE**  
The 360° turning radius technology helps you negotiate tight corners and obstacles.

Cutting width:	152 cm, 60"
Area performance (rec.):	15,000 m <sup>2</sup> /h
Discharge type:	Side discharge
Engine:	Kawasaki OHV, V-TWIN dual cylinder
Engine displacement:	852 cm <sup>3</sup>
Drive:	Dual Hydrostatic
Transmission:	Parker HTG 12 cc
Max. speed:	16 km/h (forward)/8 km/h (reverse), 10mph (forward) / 5mph (reverse)
Cutting height adjustment:	17 positions
Fuel tank capacity:	2 x 34 litres

Kawasaki is a registered trademark of Kawasaki Heavy Industries, Ltd.

[www.cubcadet.co.uk](http://www.cubcadet.co.uk)

PROFESSIONAL ZERO-TURNS / 110



# Z7 183

The Z7 183 makes a hard day's work easy. Step up to greater power; higher top speeds of up to 19.5kmh/12mph, more comfort and a large 183cm/72" cutting deck.



KAWASAKI 31 HP ENGINE

## Z7 183

THE ABSOLUTE POWER PACK FOR TOP REQUIREMENTS.

Powered by **Kawasaki**

**3 YEARS  
1000 HOURS  
WARRANTY  
PRIVATE &  
BUSINESS**



- A POWER MACHINE**  
With its fast speed of 12mph / 19.5km/h, the Z7 183 excels in efficiency.
- B COMFORTABLE MOWING**  
With our high-comfort seat, suspension and non-slip controls.
- C STRONG AND ROBUST**  
Welded mowing deck with 183 cm / 72" cutting width.
- D EXTREMELY AGILE**  
The 360° turning radius technology helps you negotiate tight corners and obstacles easily.

Cutting width:	183 cm, 72"
Area performance (rec.):	18,000 m <sup>2</sup> /h
Discharge type:	Side discharge
Engine:	Kawasaki OHV, V-TWIN dual cylinder
Engine displacement:	999 cm <sup>3</sup>
Drive:	Dual Hydrostatic
Transmission:	Parker HTG 14 cc
Max. speed:	19.5 km/h (forward)/10 km/h (reverse), 12mph (forward) / 6mph (reverse)
Cutting height adjustment:	17 positions
Fuel tank capacity:	2 x 34 litres with fuel gauge

Kawasaki is a registered trademark of Kawasaki Heavy Industries, Ltd.

[www.cubcadet.co.uk](http://www.cubcadet.co.uk)

PROFESSIONAL ZERO-TURNS / 112



## Z9 183id

MADE FOR SLOPES

Powered by  
**Kawasaki**

**3 YEARS  
1000 HOURS  
WARRANTY**  
PRIVATE &  
BUSINESS

**TACKLES  
STEEP SLOPES  
OF UP TO  
25° / 46%.**

### OUTSTANDING MOWING PERFORMANCE

Thanks to the technical equipment, mowing straight lines, zero radius turns and mowing on steep slopes are easy.

### WORK EFFICIENTLY AND DRIVE COMFORTABLY

With the comfort features like power steering, you can enjoy a relaxed ride throughout the day. The air ride seat adjusts the seat firmness to your personal preferences.

### ELECTRONICALLY ADJUSTABLE CUTTING DECK

Adjust the cutting deck to the specific requirements with just the touch of a button.

### CLIMBING ABILITIES

Extremely wide double tyres and the all-wheel steering ensure maximum stability and precision even on steep slopes with inclines of up to 25° / 46%.


### POWER AND ECONOMY COMBINED

Thanks to the electronic direct injection, the robust Kawasaki engine combines maximum performance with low fuel consumption.

### A RELIABLE PARTNER OVER YEARS

Cub Cadet gives you a commercial warranty of 3 years or up to 1000 working hours\* on the new Z9 183id.

\*Whichever comes first

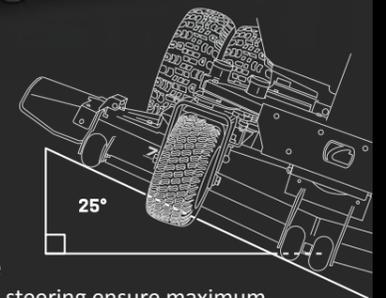

**KAWASAKI FX 1000V EFI  
V-TWIN DUAL CYLINDER**

# Z9 183id

The Z9 183id is a commercial zero-turn mower with extremely wide double tyres – developed to tackle steep slopes of up to 25° / 46%. The Z9 has an extremely robust and multi-reinforced steel cutting deck, outstanding mowing performance and air-cushioned seat. Ideal for commercial users and owners of large properties with challenging terrain, the Z9 will deliver a quality cut time and time again.

Cutting width:	183cm, 72"
Area performance (rec.):	18,000 m <sup>2</sup> /h
Discharge type:	Side discharge
Engine:	Kawasaki FX1000V EFI, V-TWIN dual cylinder
Engine displacement:	999 cm <sup>3</sup>
Drive:	Dual Hydrostatic
Transmission:	Parker HTG 16cc
Max. speed:	19.5 km/h (forward) / 10 km/h (reverse), 12mph (forward) / 6mph (reverse)
Cutting height adjustment:	17 positions
Fuel capacity:	2 x 34 litres with fuel gauge

Kawasaki is a registered trademark of Kawasaki Heavy Industries, Ltd.

[www.cubcadet.co.uk](http://www.cubcadet.co.uk)

PROFESSIONAL ZERO-TURNS / 114



	Z1 137	Z5 152
<b>ENGINE</b>		
Engine type	KOHLER Confidant EFI EZT 745	Kawasaki OHV
Engine displacement	747 cm <sup>3</sup>	852 cm <sup>3</sup>
Rated power	14.4 kW / 2,300 min <sup>-1</sup>	17.2 kW / 2,500 min <sup>-1</sup>
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	2 x 15 l	2 x 34 l
Drive	Dual Hydrostatic	Dual Hydrostatic
Transmission	Hydrogear ZT3400	Parker HTG 12 cc
Lubrication	Pressure oil lubrication	Pressure oil lubrication
<b>CUTTING SYSTEM</b>		
Area performance (rec.)	13,500 m <sup>2</sup> /h	15,000 m <sup>2</sup> /h
Cutting width	137cm / 54"	152cm / 60"
Cutting height (min-max)	26-127 mm	26-127 mm
Cutting options	2-in-1	2-in-1
Number of blades	3	3
Deck engagement	Electric PTO	Electric PTO
Deck height positions	17 positions	17 positions
Deck wheels	4 + 2 Nose	4 + 2 front roller
Mulch Kit	Standard	Standard
<b>DISCHARGE SYSTEM</b>		
Ejection type	Side discharge	Side discharge
Grass deflector	Standard	Standard
<b>FRAME</b>		
Front bumper/rear bumper	- / Standard	- / Standard
Turning circle	0 cm	0 cm
Wheel size (f/r in inch)	13 x 6.5 / 24 x 12	15 x 6 / 24 x 12
Wheel bearings	Ball bearings	Ball bearings
<b>ELECTRICAL SYSTEM</b>		
Battery	230 CCA	230 CCA
Headlights	-	-
Hour metre/service minder	Standard	Standard
Safety systems	Rollover bar	Rollover bar
<b>COMFORT</b>		
Seat type	High back, adjustable	High back with armrests, adjustable
Seat adjustment	Quick adjuster lever	Quick adjuster lever
Steering wheel	Soft-Grip	Soft-Grip
Utility bin	-	-
Mow in reverse	Standard	Standard
Battery charger	-	-
<b>DIMENSIONS</b>		
Vibration value body/K-Factor	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm/K-Factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	180 cm / 145 cm / 130 cm	230 cm / 160 cm / 134 cm
Net weight	360 kg	680 kg

	Z7 183	Z9 183id
<b>ENGINE</b>		
Engine type	Kawasaki OHV	Kawasaki FX1000V EFI
Engine displacement	999 cm <sup>3</sup>	999 cm <sup>3</sup>
Rated power	21 kW / 2,600 min <sup>-1</sup>	28 kW / 2,600 min <sup>-1</sup>
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	2 x 34 l with fuel gauge	2 x 34 l, with fuel indicator
Drive	Dual Hydrostatic	Dual Hydrostatic
Transmission	Parker HTG 14 cc	Parker HTG 16cc
Lubrication	Pressure oil lubrication	Pressure oil lubrication
<b>CUTTING SYSTEM</b>		
Area performance (rec.)	18,000 m <sup>2</sup> /h	18,000 m <sup>2</sup> /h
Cutting width	183cm / 72"	183cm / 72"
Cutting height (min-max)	26-127 mm	26-127 mm
Cutting options	2-in-1	2-in-1
Number of blades	3	3
Deck engagement	Electric PTO	Electric PTO
Deck height positions	17 positions	17 positions
Deck wheels	4 + 2 Nose + 1 deck rear rollers	4 + 2 Nose + 1 deck rear rollers
Mulch Kit	Standard	Standard
<b>DISCHARGE SYSTEM</b>		
Ejection type	Side discharge	Side discharge
Grass deflector	Standard	Standard
<b>FRAME</b>		
Front bumper/rear bumper	- / Standard	- / Standard
Turning circle	0 cm	0 cm
Wheel size (f/r in inch)	16 x 6.5 / 24 x 12	16 x 6.5 / 24 x 12
Wheel bearings	Ball bearings	Ball bearings
<b>ELECTRICAL SYSTEM</b>		
Battery	230 CCA	230 CCA
Headlights	-	-
Hour metre/service minder	Standard	Standard
Safety systems	Rollover bar	Rollover bar
<b>COMFORT</b>		
Seat type	High back with armrests, adjustable	High back with armrests, individually adjustable
Seat adjustment	Quick adjuster lever	Quick adjuster lever
Steering wheel	Soft-Grip	Soft-Grip
Utility bin	-	Standard
Mow in reverse	Standard	Standard
Battery charger	-	-
<b>DIMENSIONS</b>		
Vibration value body/K-Factor	1.0 / 0.5 m/s <sup>2</sup>	1.0 / 0.5 m/s <sup>2</sup>
Vibration value hand/arm/K-Factor	5.0 / 1.5 m/s <sup>2</sup>	5.0 / 1.5 m/s <sup>2</sup>
Dimensions (L/W/H)	226 cm / 185 cm / 131 cm	226 cm / 185 cm / 131 cm
Net weight	732 kg	840kg

## PRO SERIES ACCESSORIES

	<b>SNOW CHAINS</b>	
	Snow chains for Z1	Part number: 490-241-0026
	Snow chains for Z5 and Z7	Part number: 490-241-0036
	<b>DOZER BLADE</b>	
	Dozer blade for Z5 and Z7	Part number: 59B30036150
	<b>ELECTRIC DECK LIFT KIT</b>	
	Electric deck lift for Z1	Part number: 19B70045100
	Electric deck lift for Z5 and Z7	Part number: 59A30050150
	<b>HEAVY DUTY LAWN STRIPING KIT</b>	
	Heavy duty lawn striping kit for Z1	Part number: 19A70019100
	Heavy duty lawn striping kit for Z5, Z7 and Z9	Part number: 59A30052150

