

Specifications / Dimensions

NIRAMI	NRM 3					
	RGB			RGB + IR		
	Primary	Resort	Tertiary	Primary	Resort	Tertiary
Chutes - Quantity	3					
- Width (mm)	336					
RGB Camera with LED Light Source	6					
NIR Camera with LED Light Source	-			3		
Ejector Valves	252 @ 4mm					
Air Consumption (NL/Min)	600-1,500 (5.5-11kW Compressor)					
Power Supply (VAC)	Single Phase 220-240 VAC					
Net Weight (kg)	1,020					
Dimensions (mm)	W 1,728 x L 1,633 x H 1,720					

NIRAMI	NRM 5					
	RGB			RGB + IR		
	Primary	Resort	Tertiary	Primary	Resort	Tertiary
Chutes - Quantity	5					
- Width (mm)	336					
RGB Camera with LED Light Source	10					
NIR Camera with LED Light Source	-			5		
Ejector Valves	420 @ 4mm					
Air Consumption (NL/Min)	1,000-2,000 (7.5-15kW Compressor)					
Power Supply (VAC)	Single Phase 220-240 VAC					
Net Weight (kg)	1,550					
Dimensions (mm)	W 2,447 x L 1,633 x H 1,720					


NIRAMI	NRM 7					
	RGB			RGB + IR		
	Primary	Resort	Tertiary	Primary	Resort	Tertiary
Chutes - Quantity	7					
- Width (mm)	336					
RGB Camera with LED Light Source	14					
NIR Camera with LED Light Source	-			7		
Ejector Valves	588 @ 4mm					
Air Consumption (NL/Min)	1,400-3,500 (11-25kW compressor)					
Power Supply (VAC)	Single Phase 220-240					
Net Weight (kg)	1,960					
Dimensions (mm)	W 3,106 x L 1,633 x H 1,720					

* Sorting performance and capacity vary depending on variety, condition of material and initial contaminations

Full-Color RGB, NIR and Shape Sorting



NRM Series

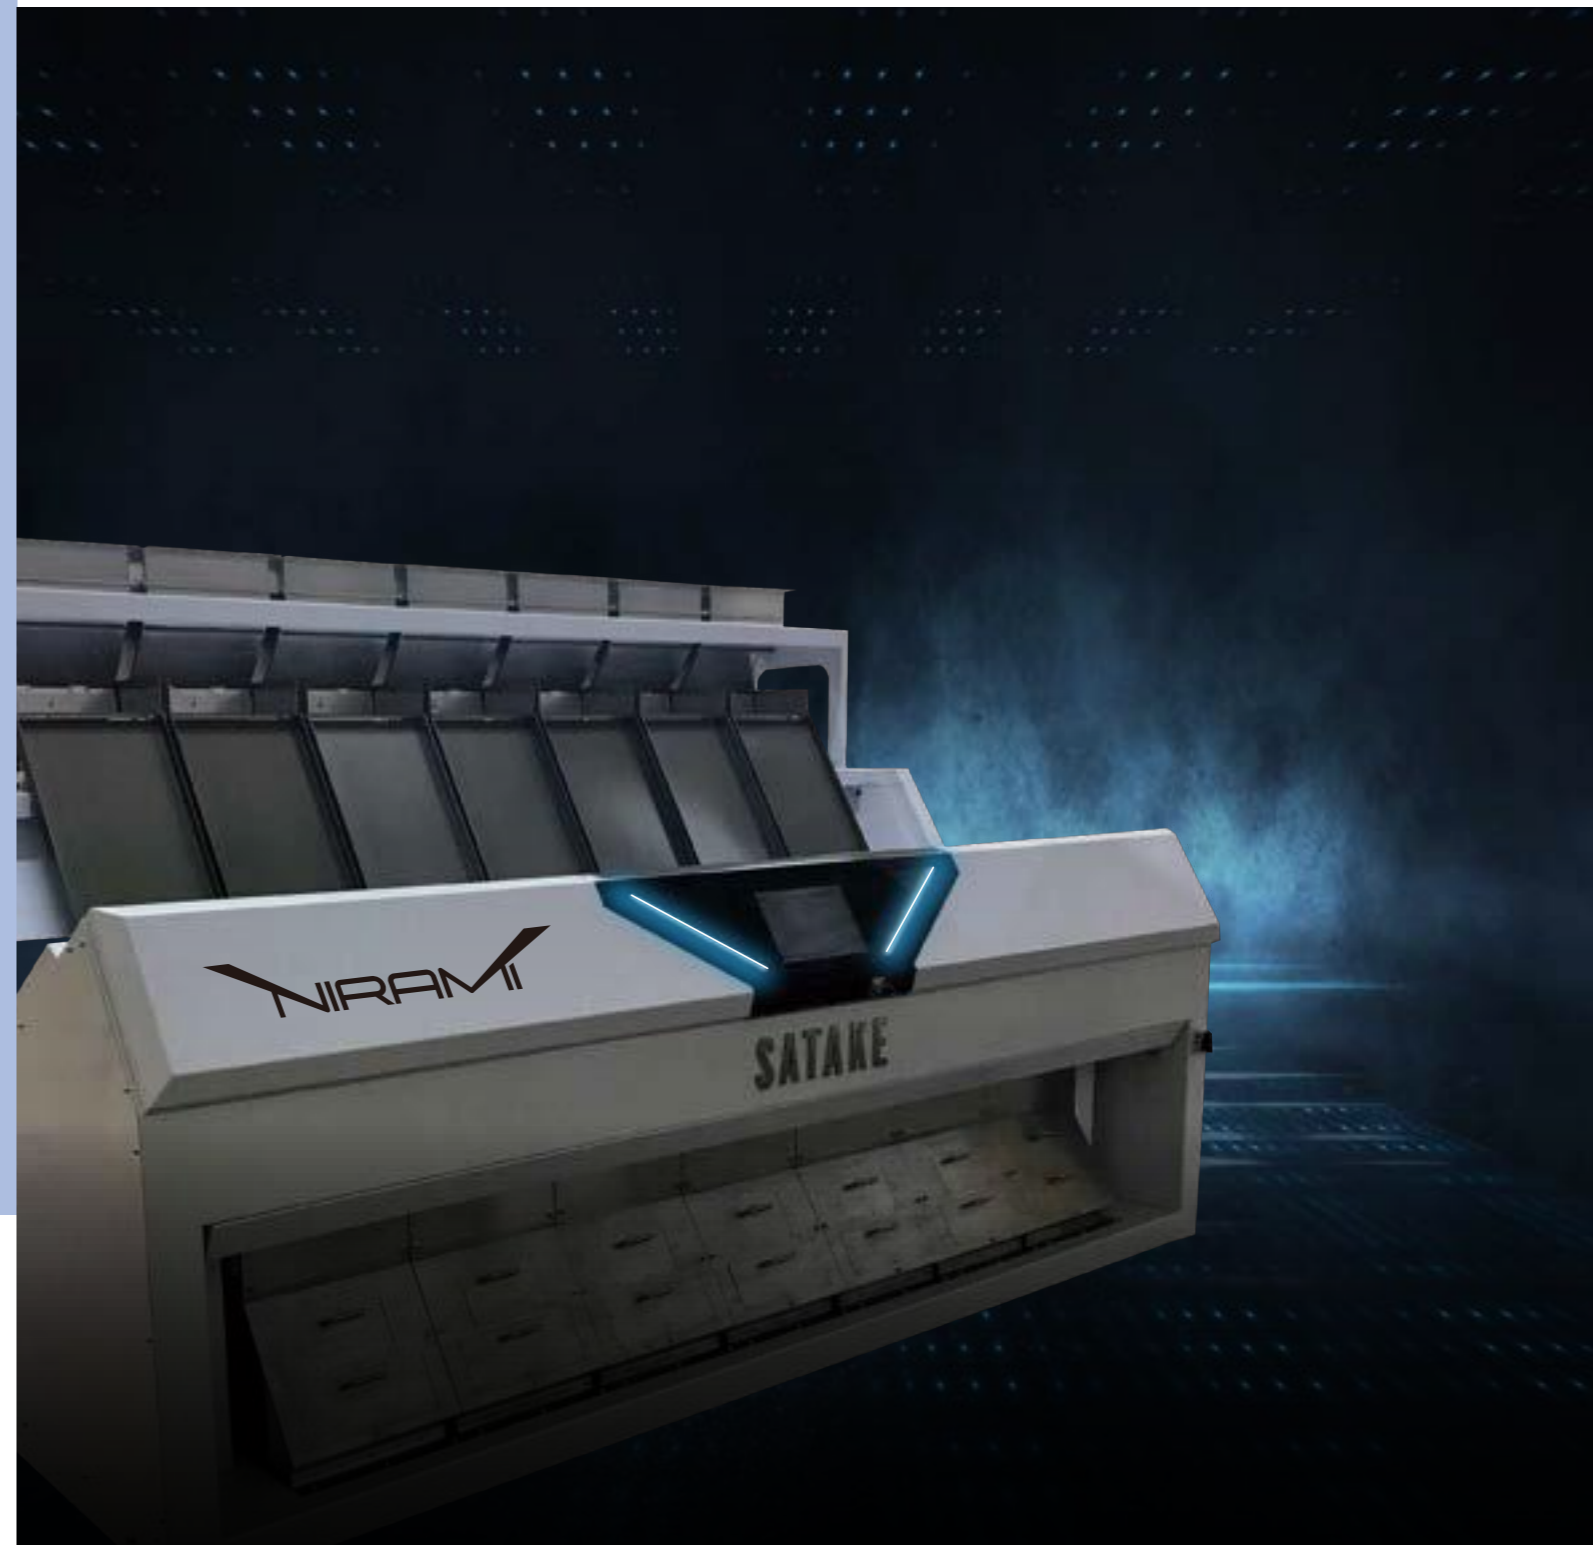

All copyright and trademark rights of this catalog belong to Satake Co., unless otherwise noted. Unauthorized copying, reprinting, etc. are forbidden. All Satake products are the subject of continuous development and, as a result, their specification may change and differ in detail from those shown.

SATAKE CORPORATION

Head Office

2-30 Saijo Nishihonmachi,
Higashi-Hiroshima-shi, Hiroshima-ken,
739-8602, Japan
URL : <https://satake-group.com>

Korea Branch

Daekyo Building, 16F, 239,
Daedeok-daero, Seo-gu, Daejeon,
35229, Korea
URL : <https://satake-group.com>

SATAKE USA INC.

10900 Cash Road,
Stafford, Texas, 77477, U.S.A.
URL : www.satake-usa.com

SATAKE AMERICA LATINA LTDA.

Rua Xavantes, 155-Pav. 20, Bairro
Atradores, CEP 89203-210, Joinville,
Santa Catarina, Brazil
URL : www.satake.com.br

SATAKE EUROPE LTD.

Horsfield Way, Bredbury Industrial Park,
Bredbury, Stockport, Cheshire, SK6 2SU,
U.K.
URL : www.satake-europe.com

SATAKE INDIA ENGINEERING PVT. LTD.

4th Floor, Tower-1, HB Twin Towers, A2,
3, 4, Netaji Subhash Place, Wazirpur
District Centre, New Delhi, 110034, India
URL : www.satakeindia.com

SATAKE (THAILAND) CO., LTD.

133,134 Moo 5, Bangkadi, Mueang
Pathum Thani, Pathum Thani 12000,
Thailand
URL : www.satake-th.com

SATAKE ASIA CO., LTD.

888/84 Mahatun Plaza Bld., 8th Floor,
Ploenchit Rd., Lumpini, Pathumwan,
Bangkok, 10330, Thailand
URL : www.satake-th.com

PT. SATAKE GOBEL INDONESIA

Gedung Surabaya Bumi Mandiri, Lantai
9, Jalan Jenderal Basuki Rachmat
Nomor 129-137, Unit 905 B, Indonesia
URL : <https://satake-group.com>

SATAKE VIETNAM CO., LTD.

Copac Square 12 Ton Dan street, Floor
3A, Ward 13, District 4, HCMC, Vietnam
URL : <https://satakevietnam.com>

SATAKE MANUFACTURING (SUZHOU) CO., LTD.

229 Jin Feng Road, Suzhou New
District, Suzhou City, Jiangsu Province,
215129, China
URL : www.satake.cn

SATAKE AUSTRALIA PTY. LTD.

15 Leland Street, Penrith, N.S.W.,
2750, Australia
URL : www.satake.com.au


ISO 9001 Certification
(Quality Management Systems)

ISO 14001 Certification
(Environmental Management Systems)

SATAKE CORPORATION has obtained ISO9001
and ISO14001 certification.

These international standards for management
systems ensure Satake will continue to provide
high quality products and services.



The *Ultimate* Solution in Optical Sorting

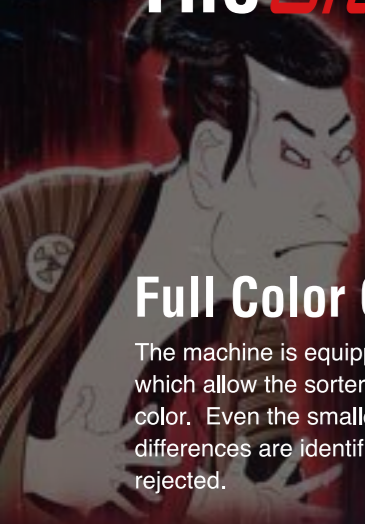

NIRAMI, Satake's brand new full color optical sorter has arrived. Offering the ultimate solution in optical sorting, NIRAMI is sure to fulfill your sorting needs. A distinctive posture seen in the classical Japanese drama of Kabuki, NIRAMI means "to look intensely".


Full Color Cameras

The machine is equipped with Japan's latest full color cameras which allow the sorter to match the eye's ability to see true color. Even the smallest color differences are identified and rejected.

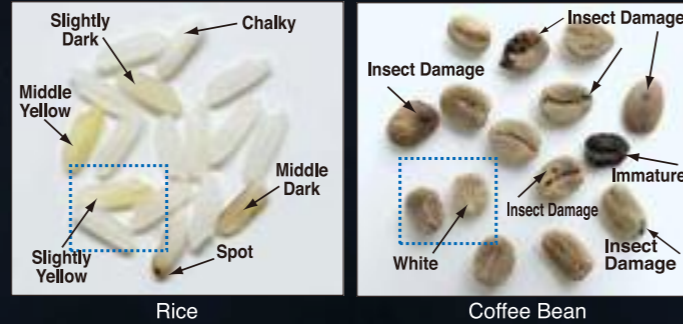

Near Infrared (NIR) Camera


The NIR camera detects inorganic foreign material such as stones, plastic, glass and other items that have a similar color to the accept product. Impurities such as glass, plastic and stones which have the same color as the accept material cannot always be detected by a full color camera. Featuring both NIR high technology camera and RGB full color cameras the NIRAMI has the ability to detect and remove foreign materials.

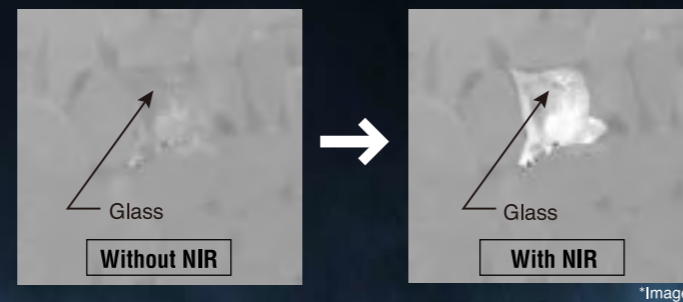

Shape Recognition


Shape recognition technology enables the machine to sort the material by shape (such as broken or adhered) which conventional color sorters could not achieve.

*Sorting performance varies depending on variety, size and contamination of material.

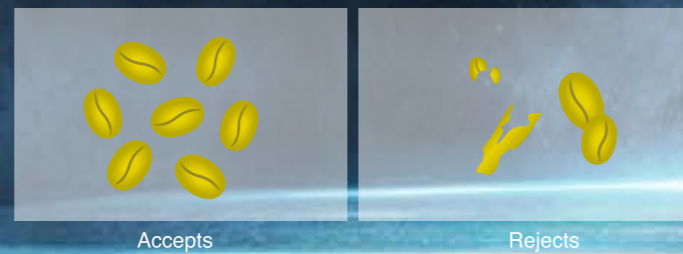

Advanced 3S Software


The 12 inch touch screen is designed for easy use. The user-friendly interface with simple icons and images provides intuitive operation of the machine. The advanced software evaluates the product application and automatically creates the sensitivity for accurate defect removal.

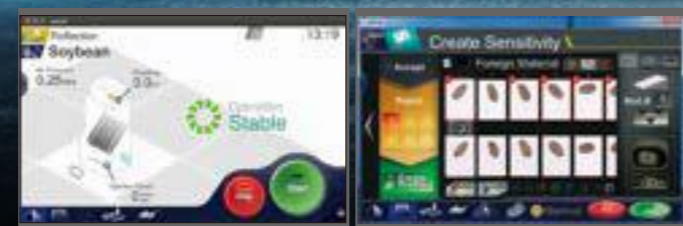

Remote Panel Control

optional service

Optional remote access via secure internet connection allowing the flexibility to monitor performance and provide diagnostic support.

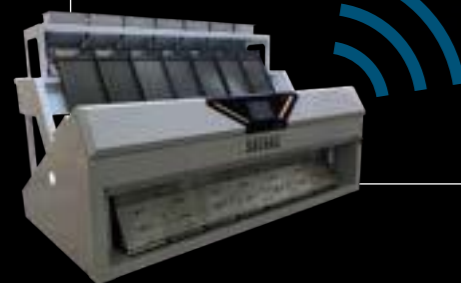

Easy Clean



The open type body enables easy access to the cleaning positions.

Sort Various Materials

The machine serves the latest requirements for sorting rice, lentils, beans, cereals and nuts etc.



High Sorting Capacity



3 to 7 extra-wide chutes (sorting modules) to suit all capacity requirements.

LED Operation Indicator



An LED operation indicator on the front of the NIRAMI allows operators to see the machine status at a glance.

Tertiary Sorting



Precise sorting is achieved with a three stage sorting system. Rejects from the primary sort can be resorted twice, within one unit, to maximise the reject concentration.

