

# **BAMBOO** **FLOORING COMPANY** EST. 2004



PEFC Certified

Bamboo Flooring from  
sustainably managed  
forests

[www.pefc.co.uk](http://www.pefc.co.uk)

## Quality in Every Step

# Contents

About us & Environmental benefits	2
Practical benefits of bamboo flooring	3
What makes bamboo unique?	4
Bamboo styles & finishes	5
Colour Options	6
Solid bamboo flooring	7 - 10
Strand woven bamboo flooring	11 - 27
Bamboo Profiles	28
Flooring comparison chart	29 - 30
Flooring installation	31
Accessories & General Maintenance & Cleaning	32
Measuring your room & delivery information	33
Frequently asked questions	34



F1005

## About Us

### The UK's largest supplier of bamboo flooring

Based in the heart of Leicestershire. Established in 2004, our three main aims are to provide flooring that is:

-  Eco-friendly
-  Cost effective
-  Unique

Our team strives to provide quality products, great knowledge and fantastic customer service whether you shop online or in-store.

Many of our products are delivered nationwide, throughout Europe and to many other destinations across the world, so no matter where you are we can deliver direct to your door.

We are always on the lookout for the latest flooring trends to help give you the widest selection of choice, so check out our bamboo flooring range and find the right floor for you.

## Environmental Benefits



### Clean Air - FloorScore Certified

Our bamboo floors have been certified by 'Floor Score' which assures our customers that no Volatile Organic Compounds (VOCs) from the flooring will affect your indoor air quality or have any negative health effects.



### From Stem to Strip

Hardwood alternatives reach maturity in around 25 years. Bamboo only takes 5 years until it is ready to harvest, making it the most sensible, renewable and abundant resource for flooring.



### Vegan Certified

We are proud to be the first flooring company in the world carry the Vegan Trademark. All of our floors, including the adhesives, stains and lacquers which are used in production, are completely free of animal products or testing.



### Preservation

Bamboo releases around 35% more oxygen into the air than similar sized trees, matures much quicker and in turn helps to improve soil conditions and prevent erosion due to not having to be replanted once cut.



PEFC Certified


Bamboo Flooring from sustainably managed forests

PEFC  
PEFC/16-37-2431

www.pefc.co.uk

### PEFC Certified

Bamboo is a grass and great care is taken to preserve the root for future harvesting. When cultivated in this way, the bamboo can naturally keep growing without the need of replanting vast areas of a plantation.



### Maintenance Free

Plantations of bamboo require very little maintenance, energy and water to grow. It can also be grown without the need of pesticides or chemicals because of its own anti-bacterial agent.



# Practical benefits of bamboo flooring

\*Only available on our Uniclic Strand Woven & Parquet Block bamboo flooring range.



## Water & slip-resistant

Moisture resistant and ideal for kitchen use. Firm under foot, with a slip resistance value of R10 - the highest slip rating available\*.



## Dirt repelling & low maintenance

The lacquered surface repels dirt, spills, and dust mites. Sweep, mop, or vacuum to keep your floor clean and hygienic.




## Mark & stain resistant

Tougher than oak, Strand Woven bamboo flooring can withstand a lot. Marks and stains can easily be removed from the lacquered surface.




## Sandable surface

Sand back the surface up to 3 times and keep your bamboo floor looking its for years to come (Natural & Carbonised colours only).



## Minimal indentation


Our Strand Woven bamboo is proven to withstand wear for years from high heels and stains, ideal for high traffic areas.



## Underfloor heating compatible

Bamboo has a natural warmth and comes with a guarantee for use with underfloor heating (Selected floors only).

# What makes bamboo so unique?



## Minimal shrinkage & expansion

Bamboo flooring is extremely stable due to its construction, giving high dimensional stability to every plank.




## Warranty

Quality guaranteed. 25 year residential and 10 year commercial structural warranty.



## Natural look & feel

Natural in every way, bamboo flooring is a refreshing take on traditional wood, thanks to its unique grain and texture.



## Micro bevelled


A bevelled edge around each plank gives bamboo flooring an even more distinctive look and feel.



# Bamboo styles & finishes


Our bamboo flooring is available in various different colours, sizes, and profiles. Whether it be for a kitchen, lounge or another room in your home, this flooring guide will help you make the right decision.

## Construction Types




### Horizontal Bamboo

The bamboo strips are glued together horizontally to form the plank. The characteristic bamboo knots are clearly visible on surface. **This flooring construction has the same hardness rating as oak.**



### Vertical Bamboo

The strips of bamboo are glued together vertically to form the plank. The bamboo grain appears thinner and is less evident on the surface. **This flooring construction has the same hardness rating as oak.**



### Strand Woven Bamboo

The surface grain is random as the strips of bamboo are torn into strands and then compressed with a resin using a cold press to form the plank. **This flooring construction is twice as hard as oak.**

## Profiles & installation



### Tongue & Groove (Horizontal, Vertical & Strand Woven)

The solid tongue and groove profile is finished with a satin-matt lacquer. This must be glued together over an underlay or glued directly down to the subfloor.




### Tongue & Groove - Parquet Block (Strand Woven only)

The solid tongue and groove profile for our parquet block features a Bona matt / anti-slip lacquered finish. This can only be glued directly down to the subfloor. **Underfloor heating compatible.**



### Solid Uniclic® (Strand Woven only)

The solid Uniclic® patented design clicks together without the need for glue. The surface is finished with Bona matt anti-slip lacquer and can be installed over underlay or glued directly to the subfloor. **Underfloor heating compatible.**



### Engineered Uniclic® (Strand Woven only)

The engineered Uniclic® patented design features a wear layer of bamboo that is glued to a plywood base and clicks together without the need for glue. The surface is finished with Bona matt anti-slip lacquer and can be installed over underlay or glued directly to the subfloor. **Underfloor heating compatible.**

# Colour Options

\*The carbonising process creates a darker shade with our strand woven bamboo products.




### Natural

The natural colour of bamboo



### Carbonised

A heat treated bamboo that turns brown during the process\*




### Stone Grey

Grey coloured stain with distressed features added to the surface.




### Antique Taupe

Taupe coloured stain with distressed features added to the surface.



### Brushed

Carbonised in colour with a wire brushed surface that gives more depth and texture.



### Rustic

Carbonised in colour with black streaks added to the surface



### Chestnut

Chestnut coloured stain with distressed features added to the surface.



### Autumn Hazelnut

Hazelnut coloured stain with distressed features added to the surface.



### Granite Grey

Grey coloured stain with distressed features added to the surface.



F1057





Pack coverage: 2.21m<sup>2</sup>  
(24 planks per pack)  
\*Flooring colours may appear differently depending on the shape, size, and lighting of the room.



Pack coverage: 2.21m<sup>2</sup>  
(24 planks per pack)  
\*Flooring colours may appear differently depending on the shape, size, and lighting of the room.



F1005

# Solid Natural Horizontal Bamboo Flooring

Board Size: (L) 960mm (W) 96mm (D) 15mm



- Tongue & groove fit
- Warranty
- Float over underlay
- Glue down
- Satin-matt lacquer
- Flat finish
- Residential use

- Finish**

Pre-finished with 6 coats of satin German lacquer, including UV protection.
- Profile Type**

Tongue & groove with a micro bevelled edge around all four sides of each plank.
- Construction**

15mm thick solid bamboo flooring glued in horizontal slats to create a wide grain look.
- Installation**

Float over underlay, secret nail, or glue directly down to subfloor.  
(Using Osmo MS wood floor Adhesive)

F1007

# Solid Carbonised Horizontal Bamboo Flooring

Board Size: (L) 960mm (W) 96mm (D) 15mm



- Tongue & groove fit
- Warranty
- Float over underlay
- Glue down
- Satin-matt lacquer
- Flat finish
- Residential use

- Finish**

Pre-finished with 6 coats of satin German lacquer, including UV protection.
- Profile Type**

Tongue & groove with a micro bevelled edge around all four sides of each plank.
- Construction**

15mm thick solid bamboo flooring glued in horizontal slats to create a wide grain look.
- Installation**

Float over underlay, secret nail, or glue directly down to subfloor.  
(Using Osmo MS wood floor Adhesive)





Pack coverage: 2.21m<sup>2</sup>  
(24 planks per pack)  
\*Flooring colours may appear differently depending on the shape, size, and lighting of the room.




Pack coverage: 2.21m<sup>2</sup>  
(24 planks per pack)  
\*Flooring colours may appear differently depending on the shape, size, and lighting of the room.



F1006

# Solid Natural Vertical Bamboo Flooring

Board Size: (L) 960mm (W) 96mm (D) 15mm



- Tongue & groove fit
- 25 YEAR** Warranty
- Float over underlay
- Glue down
- Satin-matt lacquer
- Flat finish
- Residential use

**Finish**  
Pre-finished with 6 coats of satin German lacquer, including UV protection.

**Construction**  
15mm thick solid bamboo flooring glued in horizontal slats to create a wide grain look.


**Profile Type**  
Tongue & groove with a micro bevelled edge around all four sides of each plank.

**Installation**  
Float over underlay, secret nail, or glue directly down to subfloor.  
(Using Osmo MS wood floor Adhesive)

F1008

# Solid Carbonised Vertical Bamboo Flooring

Board Size: (L) 960mm (W) 96mm (D) 15mm



- Tongue & groove fit
- 25 YEAR** Warranty
- Float over underlay
- Glue down
- Satin-matt lacquer
- Flat finish
- Residential use

**Finish**  
Pre-finished with 6 coats of satin German lacquer, including UV protection.

**Construction**  
15mm thick solid bamboo flooring glued in horizontal slats to create a wide grain look.

**Profile Type**  
Tongue & groove with a micro bevelled edge around all four sides of each plank.

**Installation**  
Float over underlay, secret nail, or glue directly down to subfloor.  
(Using Osmo MS wood floor Adhesive)






By sourcing PEFC products, we are supporting sustainably managed forests globally

www.pefc.co.uk


**Parquet block pattern formation**



**Herringbone**  
Laid out at a 45° angle



**Brickbond**  
Laid out parallel



**Basket weave**  
Laid out at a 90° angle

Pack coverage: 1.134m<sup>2</sup>  
(28 planks per pack)

\*Flooring colours may appear differently depending on the shape, size, and lighting of the room.





By sourcing PEFC products, we are supporting sustainably managed forests globally

www.pefc.co.uk

**Parquet block pattern formation**



**Herringbone**  
Laid out at a 45° angle



**Brickbond**  
Laid out parallel



**Basket weave**  
Laid out at a 90° angle

Pack coverage: 1.134m<sup>2</sup>  
(28 planks per pack)


\*Flooring colours may appear differently depending on the shape, size, and lighting of the room.




F1038 **Bona**


Solid Carbonised Strand Woven Parquet Block Bamboo Flooring


Board Size: (L) 450mm (W) 90mm (D) 12mm





- 


Tongue & groove fit
- 


2x Harder than oak
- 


Underfloor heating use
- 

25 YEAR
- 

Glue down
- 

Matt lacquer
- 

Flat finish
- 

Residential use
- 

Commercial use

**Finish**

Pre-finished with Matt Bona Naturale Anti-slip lacquer, Inc UV protection.

**Construction**

Strands of bamboo crushed together with a resin using a cold press.  
(2x harder than Horizontal & Vertical Bamboo flooring)

**Profile Type**

Tongue & groove with a micro bevelled edge around all four sides of each plank.

**Installation**


Glue directly down to subfloor.  
(Using Osmo MS Wood Floor Adhesive)


F1059 **Bona**


Solid Natural Strand Woven Parquet Block Bamboo Flooring


Board Size: (L) 450mm (W) 90mm (D) 12mm





- 


Tongue & groove fit
- 


2x Harder than oak
- 


Underfloor heating use
- 

25 YEAR
- 

Glue down
- 

Matt lacquer
- 

Flat finish
- 

Residential use
- 

Commercial use

**Finish**

Pre-finished with Matt Bona Naturale Anti-slip lacquer, Inc UV protection.

**Construction**

Strands of bamboo crushed together with a resin using a cold press.  
(2x harder than Horizontal & Vertical Bamboo flooring)

**Profile Type**

Tongue & groove with a micro bevelled edge around all four sides of each plank.

**Installation**

Glue directly down to subfloor.  
(Using Osmo MS Wood Floor Adhesive)






Pack coverage: 2.29m<sup>2</sup>  
(20 planks per pack)

\*Flooring colours may appear differently depending on the shape, size, and lighting of the room.



Pack coverage: 2.29m<sup>2</sup>  
(20 planks per pack)


\*Flooring colours may appear differently depending on the shape, size, and lighting of the room.

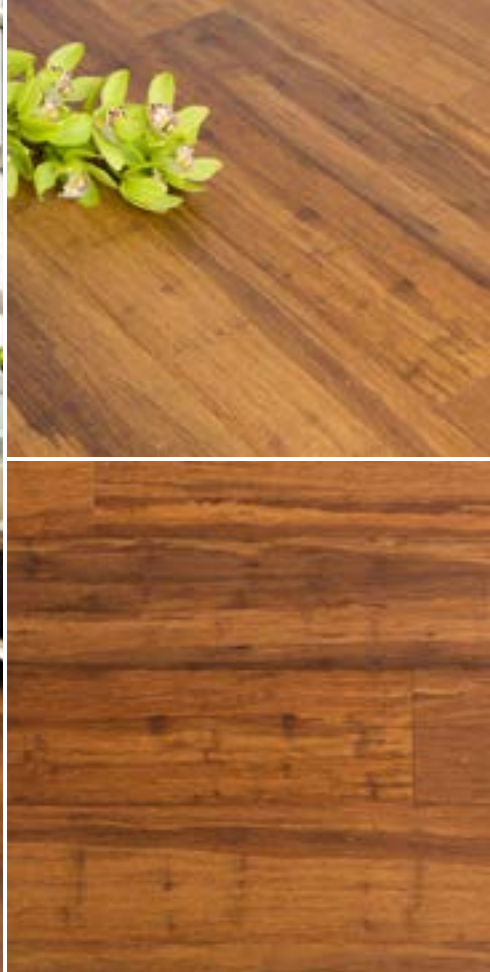


F1037 **UNICLIC** *Bona*


# Solid Natural Strand Woven 125mm Bamboo Flooring

**Board Size:** (L) 915mm (W) 125mm (D) 10mm







Click fit




2x Harder than oak




Underfloor heating use




25 YEAR Warranty




Float over underlay




Glue down




Matt lacquer



Flat finish



Residential use



Commercial use

## Finish

Pre-finished with Matt Bona Naturale Anti-slip lacquer, Inc UV protection.

## Construction

Strands of bamboo crushed together with a resin using a cold press.  
(2x harder than Horizontal & Vertical Bamboo flooring)

## Profile Type

Uniclic® patented design with micro bevelled edge around all four sides of each plank. This requires no glue when fitting.


## Installation


Float over underlay or glue directly down to subfloor.  
(Using Osmo MS Wood Floor Adhesive)

F1039 **UNICLIC** *Bona*


# Solid Carbonised Strand Woven 125mm Bamboo Flooring

**Board Size:** (L) 915mm (W) 125mm (D) 10mm







Click fit




2x Harder than oak




Underfloor heating use




25 YEAR Warranty




Float over underlay




Glue down




Matt lacquer



Flat finish



Residential use



Commercial use

## Finish

Pre-finished with Matt Bona Naturale Anti-slip lacquer, Inc UV protection.

## Construction

Strands of bamboo crushed together with a resin using a cold press.  
(2x harder than Horizontal & Vertical Bamboo flooring)

## Profile Type

Uniclic® patented design with micro bevelled edge around all four sides of each plank. This requires no glue when fitting.

## Installation

Float over underlay or glue directly down to subfloor.  
(Using Osmo MS Wood Floor Adhesive)





Pack coverage: 2.29m<sup>2</sup>  
(20 planks per pack)

\*Flooring colours may appear differently depending on the shape, size, and lighting of the room.



Pack coverage: 2.29m<sup>2</sup>  
(20 planks per pack)


\*Flooring colours may appear differently depending on the shape, size, and lighting of the room.





F1058 **UNICLIC** *Bona*


# Solid Chestnut Strand Woven 125mm Bamboo Flooring


**Board Size:** (L) 915mm (W) 125mm (D) 10mm





- 


Click fit
- 


2x Harder than oak
- 


Underfloor heating use
- 


25 YEAR Warranty
- 

Float over underlay
- 

Glue down
- 

Matt lacquer
- 

Distressed finish
- 

Residential use
- 

Commercial use

**Finish**

Distressed surface features with a chestnut stain applied. Pre-finished with Matt Bona Naturale Anti-slip lacquer, Inc UV protection.

**Profile Type**

Uniclic® patented design with micro bevelled edge around all four sides of each plank. This requires no glue when fitting.

**Construction**

Strands of bamboo crushed together with a resin using a cold press. (2x harder than Horizontal & Vertical Bamboo flooring)


**Installation**


Float over underlay or glue directly down to subfloor. (Using Osmo MS Wood Floor Adhesive)


F1062 **UNICLIC** *Bona*


# Solid Autumn Hazelnut Strand Woven 125mm Bamboo Flooring


**Board Size:** (L) 915mm (W) 125mm (D) 10mm





- 


Click fit
- 


2x Harder than oak
- 


Underfloor heating use
- 


25 YEAR Warranty
- 

Float over underlay
- 

Glue down
- 

Matt lacquer
- 

Distressed finish
- 

Residential use
- 

Commercial use

**Finish**

Distressed surface features with a hazelnut stain applied .Pre-finished with Matt Bona Naturale Anti-slip lacquer, Inc UV protection.

**Profile Type**

Uniclic® patented design with micro bevelled edge around all four sides of each plank. This requires no glue when fitting.

**Construction**

Strands of bamboo crushed together with a resin using a cold press. (2x harder than Horizontal & Vertical Bamboo flooring)

**Installation**

Float over underlay or glue directly down to subfloor. (Using Osmo MS Wood Floor Adhesive)



floor

score

certified by

SCS Global Services

Vegan

PEFC

PEFC/16-37-2431

By sourcing PEFC products, we are supporting sustainably managed forests globally

www.pefc.co.uk

Pack coverage: 2.29m<sup>2</sup>  
(20 planks per pack)

\*Flooring colours may appear differently depending on the shape, size, and lighting of the room.

floor

score

certified by

SCS Global Services

Vegan

PEFC

PEFC/16-37-2431

By sourcing PEFC products, we are supporting sustainably managed forests globally

www.pefc.co.uk

Pack coverage: 2.29m<sup>2</sup>  
(20 planks per pack)

\*Flooring colours may appear differently depending on the shape, size, and lighting of the room.

F1063 **UNICLIC** *Bona*

## Solid Antique Taupe Strand Woven 125mm Bamboo Flooring

**Board Size:** (L) 915mm (W) 125mm (D) 10mm

Click fit

2x Harder than oak

Underfloor heating use

25 YEAR Warranty

Float over underlay

Glue down

Matt lacquer

Distressed finish

Residential use

Commercial use

**Finish**

Distressed surface features with an antique taupe stain applied. Pre-finished with Matt Bona Naturale Anti-slip lacquer, Inc UV protection.

**Profile Type**

Uniclic® patented design with micro bevelled edge around all four sides of each plank. This requires no glue when fitting.

**Construction**

Strands of bamboo crushed together with a resin using a cold press. (2x harder than Horizontal & Vertical Bamboo flooring)

**Installation**

Float over underlay or glue directly down to subfloor. (Using Osmo MS Wood Floor Adhesive)

F1065 **UNICLIC** *Bona*

## Solid Granite Grey Strand Woven 125mm Bamboo Flooring

**Board Size:** (L) 915mm (W) 125mm (D) 10mm

Click fit

2x Harder than oak

Underfloor heating use

25 YEAR Warranty

Float over underlay

Glue down

Matt lacquer

Distressed finish

Residential use

Commercial use

**Finish**

Distressed surface features with a grey stain applied. Pre-finished with Matt Bona Naturale Anti-slip lacquer, Inc UV protection.

**Profile Type**

Uniclic® patented design with micro bevelled edge around all four sides of each plank. This requires no glue when fitting.

**Construction**

Strands of bamboo crushed together with a resin using a cold press. (2x harder than Horizontal & Vertical Bamboo flooring)

**Installation**

Float over underlay or glue directly down to subfloor. (Using Osmo MS Wood Floor Adhesive)

17

18





Pack coverage: 1.5m<sup>2</sup>  
(6 planks per pack)

\*Flooring colours may appear differently depending on the shape, size, and lighting of the room.



Pack coverage: 1.5m<sup>2</sup>  
(6 planks per pack)


\*Flooring colours may appear differently depending on the shape, size, and lighting of the room.





F1056 **UNICLIC**® **Bona**®


# Solid Brushed Carbonised Strand Woven 135mm Bamboo Flooring


**Board Size:** (L) 1850mm (W) 135mm (D) 14mm





- 


Click fit
- 


2x Harder than oak
- 


Underfloor heating use
- 


25 YEAR
- 

Float over underlay
- 

Glue down
- 

Matt lacquer
- 

Brushed finish
- 

Residential use
- 

Commercial use

**Finish**

Pre-finished with Matt Bona Naturale Anti-slip lacquer, Inc UV protection. The wire brushed surface gives a textured feel.

**Construction**

Strands of bamboo crushed together with a resin using a cold press. (2x harder than Horizontal & Vertical Bamboo flooring)

**Profile Type**

Uniclic® patented design with micro bevelled edge around all four sides of each plank. This requires no glue when fitting.


**Installation**


Float over underlay or glue directly down to subfloor. (Using Osmo MS Wood Floor Adhesive)


F1040 **UNICLIC**® **Bona**®


# Solid Natural Strand Woven 135mm Bamboo Flooring


**Board Size:** (L) 1850mm (W) 135mm (D) 14mm





- 


Click fit
- 


2x Harder than oak
- 


Underfloor heating use
- 


25 YEAR
- 

Float over underlay
- 

Glue down
- 

Matt lacquer
- 

Flat finish
- 

Residential use
- 

Commercial use

**Finish**

Pre-finished with Matt Bona Naturale Anti-slip lacquer, Inc UV protection.

**Construction**

Strands of bamboo crushed together with a resin using a cold press. (2x harder than Horizontal & Vertical Bamboo flooring)

**Profile Type**

Uniclic® patented design with micro bevelled edge around all four sides of each plank. This requires no glue when fitting.

**Installation**

Float over underlay or glue directly down to subfloor. (Using Osmo MS Wood Floor Adhesive)







By sourcing PEFC products, we are supporting sustainably managed forests globally

PEFC/16-37-2431 [www.pefc.co.uk](http://www.pefc.co.uk)

Pack coverage: 1.5m<sup>2</sup>  
(6 planks per pack)

\*Flooring colours may appear differently depending on the shape, size, and lighting of the room.





By sourcing PEFC products, we are supporting sustainably managed forests globally

PEFC/16-37-2431 [www.pefc.co.uk](http://www.pefc.co.uk)

Pack coverage: 1.5m<sup>2</sup>  
(6 planks per pack)


\*Flooring colours may appear differently depending on the shape, size, and lighting of the room.




F1041 **UNICLIC**® **Bona**®


## Solid Carbonised Strand Woven 135mm Bamboo Flooring

**Board Size:** (L) 1850mm (W) 135mm (D) 14mm







Click fit




2x Harder than oak




Underfloor heating use




Warranty




Float over underlay




Glue down




Matt lacquer



Flat finish



Residential use



Commercial use

**Finish**

Pre-finished with Matt Bona Naturale Anti-slip lacquer, Inc UV protection.

**Construction**

Strands of bamboo crushed together with a resin using a cold press. (2x harder than Horizontal & Vertical Bamboo flooring)

**Profile Type**

Uniclic® patented design with micro bevelled edge around all four sides of each plank. This requires no glue when fitting.


**Installation**


Float over underlay or glue directly down to subfloor. (Using Osmo MS Wood Floor Adhesive)

F1043 **UNICLIC**® **Bona**®


## Solid Rustic Carbonised Strand Woven 135mm Bamboo Flooring

**Board Size:** (L) 1850mm (W) 135mm (D) 14mm







Click fit




2x Harder than oak




Underfloor heating use




Warranty




Float over underlay




Glue down




Matt lacquer



Flat finish



Residential use



Commercial use

**Finish**

Black streaks on the surface and around the edge of each plank. Pre-finished with Matt Bona Naturale Anti-slip lacquer, Inc UV protection.

**Construction**

Strands of bamboo crushed together with a resin using a cold press. (2x harder than Horizontal & Vertical Bamboo flooring)

**Profile Type**

Uniclic® patented design with micro bevelled edge around all four sides of each plank. This requires no glue when fitting.

**Installation**

Float over underlay or glue directly down to subfloor. (Using Osmo MS Wood Floor Adhesive)





Pack coverage: 1.5m<sup>2</sup>  
(6 planks per pack)

\*Flooring colours may appear differently depending on the shape, size, and lighting of the room.



Pack coverage: 1.58m<sup>2</sup>  
(6 planks per pack)

\*Flooring colours may appear differently depending on the shape, size, and lighting of the room.





F1057 **UNICLIC**® **Bona**®


## Solid Stone Grey Strand Woven 135mm Bamboo Flooring


**Board Size:** (L) 1850mm (W) 135mm (D) 14mm





- 


Click fit
- 


2x Harder than oak
- 


Underfloor heating use
- 


Warranty
- 

Float over underlay
- 

Glue down
- 

Matt lacquer
- 

Distressed finish
- 

Residential use
- 

Commercial use

**Finish**

Distressed surface features with a grey stain applied. Pre-finished with Matt Bona Naturale Anti-slip lacquer, Inc UV protection.

**Construction**

Strands of bamboo crushed together with a resin using a cold press. (2x harder than Horizontal & Vertical Bamboo flooring)

**Profile Type**

Uniclic® patented design with micro bevelled edge around all four sides of each plank. This requires no glue when fitting.


**Installation**


Float over underlay or glue directly down to subfloor. (Using Osmo MS Wood Floor Adhesive)


F1013


## Solid Carbonised Strand Woven 142mm Bamboo Flooring


**Board Size:** (L) 1850mm (W) 142mm (D) 14mm





- 


Tongue & groove fit
- 


2x Harder than oak
- 


Warranty
- 

Float over underlay
- 

Glue down
- 

Satin-matt lacquer
- 

Flat finish
- 

Residential use
- 

Commercial use

**Finish**

Pre-finished satin with 6 coats of German lacquer, Inc UV protection.

**Construction**

Strands of bamboo crushed together with a resin using a cold press. (2x harder than Horizontal & Vertical Bamboo flooring)

**Profile Type**

Tongue and groove with a micro bevelled edge around all four sides of each plank.

**Installation**

Float over underlay or glue directly down to subfloor. (Using Osmo MS Wood Floor Adhesive)








By sourcing PEFC products, we are supporting sustainably managed forests globally

PEFC/16-37-2431 [www.pefc.co.uk](http://www.pefc.co.uk)



Pack coverage: 1.58m<sup>2</sup>  
(6 planks per pack)

\*Flooring colours may appear differently depending on the shape, size, and lighting of the room.

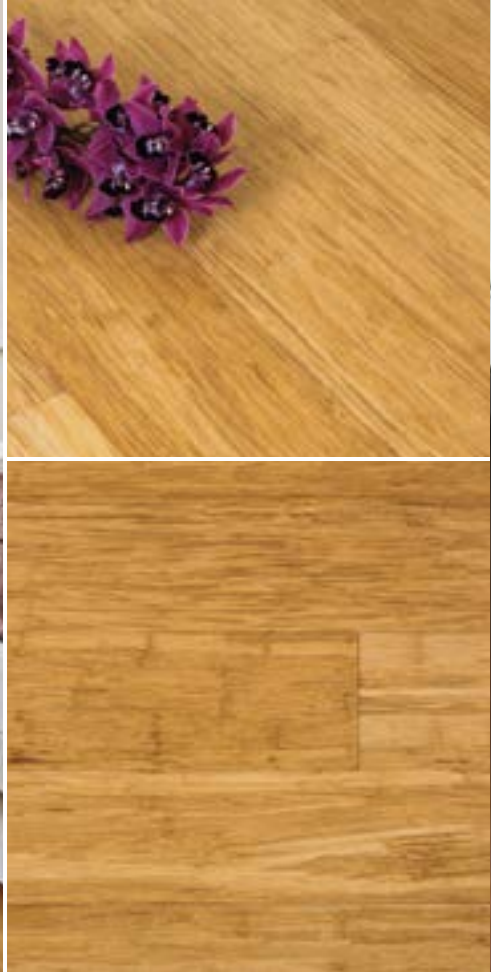



By sourcing PEFC products, we are supporting sustainably managed forests globally

PEFC/16-37-2431 [www.pefc.co.uk](http://www.pefc.co.uk)



Pack coverage: 2.81m<sup>2</sup>  
(8 planks per pack)


\*Flooring colours may appear differently depending on the shape, size, and lighting of the room.




F1014

# Solid Natural Woven 142mm Bamboo Flooring

**Board Size:** (L) 1850mm (W) 142mm (D) 14mm






Tongue & groove fit



2x Harder than oak



25 YEAR




Float over underlay



Glue down



Satin-matt lacquer



Flat finish



Residential use



Commercial use

## Finish

Pre-finished satin with 6 coats of German lacquer, Inc UV protection.

## Construction

Strands of bamboo crushed together with a resin using a cold press. (2x harder than Horizontal & Vertical Bamboo flooring)

## Profile Type

Tongue and groove with a micro bevelled edge around all four sides of each plank.


## Installation


Float over underlay or glue directly down to subfloor. (Using Osmo MS Wood Floor Adhesive)

F1022 **UNICLIC® Bona®**


# Engineered Carbonised Strand Woven 190mm Bamboo Flooring

**Board Size:** (L) 1850mm (W) 190mm (D) 14mm







Click fit




2x Harder than oak




Underfloor heating use




25 YEAR




Float over underlay




Glue down




Matt lacquer



Flat finish



Residential use



Commercial use

## Finish

Pre-finished with Matt Bona Naturale Anti-slip lacquer, Inc UV protection.

## Construction

Plywood base with a wear layer of strand woven on the surface. (2x harder than Horizontal & Vertical Bamboo flooring)

## Profile Type

Uniclic® patented design with micro bevelled edge around all four sides of each plank. This requires no glue when fitting.

## Installation

Float over underlay or glue directly down to subfloor. (Using Osmo MS Wood Floor Adhesive)






Pack coverage: 2.81m<sup>2</sup>  
(8 planks per pack)

\*Flooring colours may appear differently depending on the shape, size, and lighting of the room.

F1023 **UNICLIC®** **Bona®**

# Engineered Natural Strand Woven 190mm Bamboo Flooring

**Board Size:** (L) 1850mm (W) 190mm (D) 14mm



- Click fit
- 2x Harder than oak
- Underfloor heating use
- Warranty
- Float over underlay
- Glue down
- Matt lacquer
- Flat finish
- Residential use
- Commercial use

## Finish

Pre-finished with Matt Bona Naturale Anti-slip lacquer, Inc UV protection.

## Construction

Plywood base with a wear layer of strand woven on the surface. (2x harder than Horizontal & Vertical Bamboo flooring)

## Profile Type


Uniclic® patented design with micro bevelled edge around all four sides of each plank. This requires no glue when fitting.

## Installation

Float over underlay or glue directly down to subfloor. (Using Osmo MS Wood Floor Adhesive)


# Bamboo Profiles

All our profiles are 100% bamboo and will further compliment your choice of bamboo flooring. Each profile is available in various colours to ensure you get a seamless finish throughout.




## T-moulding

Used to cover the join between two floors of the same height.




## Threshold

For installing over carpet edges, lower flooring surfaces and perimeter walls.




## Quarter round

Covers the expansion gap when installing the bamboo flooring against existing skirting boards.




## Skirting

Covers 10mm expansion gap between the bamboo flooring and wall.




## Lip over stair nosing

Covers a 90 degree angle of stair tread. This product can be used with bamboo flooring that is floating over underlay. The bamboo flooring is used to then cover the remainder of the staircase.




## Stair nosing

Covers a 90 degree angle of stair tread. Bamboo flooring is used to cover the remainder of the staircase.



## Flush reducer

Reduces the bamboo flooring down to a lower level. For example, a ceramic floor tile.



## R-profile

Reduces the bamboo flooring down to a lower level. For example, a ceramic floor tile. Can be used when floating the bamboo flooring over underlay.









## Installation Tip

Apply Bona Vertical High Grab Adhesive to any of these bamboo profiles to ensure a secure, long lasting fit.

Flooring Comparison Chart

Shortest length board at the top, longest length board at the bottom.


Board size	Product name	Page number	Fitting method	Pack size	Installation method	Structural Warranty
(L) 450mm (W) 90mm (D) 12mm	F1038 Solid Carbonised Strand Woven Parquet Block F1059 Solid Natural Strand Woven Parquet Block	11 12		28x planks = 1.134m²	Glue down only	Residential, 25 Years Commercial, 10 Years
(L) 915mm (W) 125mm (D) 10mm	F1037 Solid Natural Strand Woven 125mm Uniclic® F1058 Solid Chestnut Strand Woven 125mm Uniclic® F1062 Solid Autumn Hazelnut Strand Woven 125mm Uniclic® F1039 Solid Carbonised Strand Woven 125mm Uniclic® F1063 Solid Antique Taupe Strand Woven 125mm Uniclic® F1065 Solid Granite Grey Strand Woven 125mm Uniclic®	13 15 16 14 17 18		20x planks = 2.29m²	Glue down only or float over underlay	Residential, 25 Years Commercial, 10 Years
(L) 960mm (W) 96mm (D) 15mm	F1005 Solid Natural Horizontal F1007 Solid Carbonised Horizontal F1006 Solid Natural Vertical F1008 Solid Carbonised Vertical	7 9 8 10		24x planks = 2.21m²	Glue down only, float over underlay, or secret nail	Residential, 25 Years
(L) 1850mm (W) 135mm (D) 14mm	F1040 Solid Natural Strand Woven 135mm Uniclic® F1043 Solid Rustic Carbonised Strand Woven 135mm Uniclic® F1057 Solid Stone Grey Strand Woven 135mm Uniclic® F1041 Solid Carbonised Strand Woven 135mm Uniclic® F1056 Solid Brushed Carbonised Strand Woven 135mm Uniclic®	20 22 23 21 19		6x planks = 1.5m²	Glue down only or float over underlay	Residential, 25 Years Commercial, 10 Years
(L) 1850mm (W) 142mm (D) 14mm	F1013 Solid Carbonised Strand Woven 142mm F1014 Solid Natural Strand Woven 142mm	24 25		6x planks = 1.58m²	Glue down only or float over underlay	Residential, 25 Years Commercial, 10 Years
(L) 1850mm (W) 190mm (D) 14mm	F1022 Engineered Carbonised Strand Woven 190mm Uniclic® F1023 Engineered Natural Strand Woven 190mm Uniclic®	26 27		8x planks = 2.81m²	Glue down only or float over underlay	Residential, 25 Years Commercial, 10 Years



# Flooring Installation

Need to know more about how to install your flooring? We stock a complete range of accessories to help with your flooring installation, just ask our technical team for further information.


## Installation Methods



### Float over underlay


There are two methods of fitting when laying over underlay:

1. The Tongue and Groove method - the joints of the bamboo flooring are glued together with a WPVA glue over the underlay. The glue must be applied along the full length and width of each plank to ensure a solid, secure fit when dry. For high traffic areas it is recommended the bamboo flooring is glued directly down to the sub floor using a flexible adhesive.
2. The Uniclic® method - each bamboo flooring plank is clicked together over the underlay without glue. For high traffic areas it is recommended the bamboo flooring is glued directly down to the sub floor using a flexible adhesive.



### Glue down

The bamboo flooring is glued directly to a concrete or wooden subfloor. Flexible adhesive is trowelled across the subfloor and the planks are then bonded directly down.



### Secret nail

The bamboo flooring is 'secretly' nailed down to a wooden sub-floor which has a wood grain present. A specialist nail gun is used to insert the toothed nails at a 45 degree angle on the tongue side of our tongue and groove flooring.

This method of fitting only applies to our Horizontal and Vertical bamboo flooring constructions.



F1022

# Accessories



## Underlay & Fibre Boards

Cut to size and lay directly onto any subfloor. The flooring planks are then laid on top - tongue and groove boards are glued along the full length and width of each plank, our Uniclic® floors are clicked into position without the need for glue. Our range of underlays are stocked for general use and Under Floor Heating use should you require a low tog rating.

Similar to underlay in terms of use. Fibre boards are cut to size with a retractable blade knife and placed into position. Fibre boards help reduce undulations in the sub floor to give you a level floor area.



## Flexible Adhesive

Applied with a notched trowel onto a concrete or wooden subfloor. Once the adhesive is spread, the flooring is then placed directly on top creating a full surface bond between the subfloor and floor covering.



## Liquid DPM & Primer

Applied with a roller, these products form a barrier between the concrete sub-floor and floor covering. Applying this prevents moisture rising from the concrete and attacking the flooring above, preventing board deformation.

## General Maintenance & Cleaning

Keep your flooring looking fresh and clean with specially formulated solutions and specifically designed cleaning equipment to help make cleaning your bamboo floor quick and easy. The Bona Spray Mop is ergonomically designed to clean and maintain your flooring in a sweep - trigger handle releases cleaning spray onto floor surface. The Bona Spray Mop is ergonomically designed to clean and maintain your flooring in a sweep - trigger handle releases cleaning spray onto floor surface. Ready to use and PH neutral, Bona cleaners are the perfect solution to keeping your floor looking its best.

Each Bona pad provides a different use:




Deep clean      General clean      Dusting

Official distributors of **Bona®**

F1063


# Measuring your room

Having problems calculating your room sizes? Send your floor plans by email and we can work them all out for you and email you back a quotation.

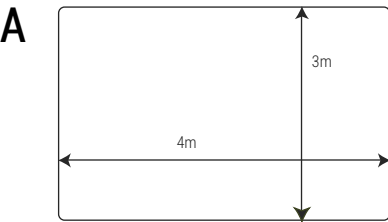

Calculation of area A

$4m \times 3m = 12m^2$

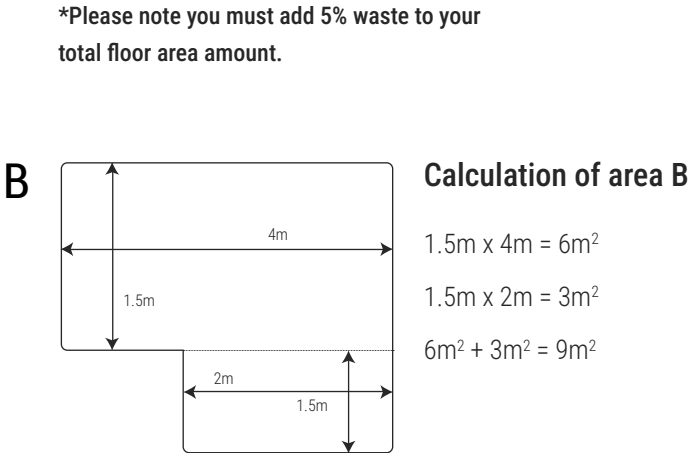

**\*Please note you must add 5% waste to your total floor area amount.**

# Delivery Information


We deliver orders of flooring and accessories to the UK, Ireland and Europe. If you would like a quote please contact us via [mail@bambooflooringcompany.com](mailto:mail@bambooflooringcompany.com) or call 0116 2741050.


 **Mainland UK**


**FREE delivery on all flooring orders over £500 before VAT (excluding Scottish Highlands and any isles)**

For orders below this amount please go to our website or alternatively call us for a delivery price. Smaller orders can be delivered next working day if ordered before 1pm. Larger flooring orders can take 2 - 3 days to deliver.

When ordering online or by phone you can select your preferred day.

 **Ireland (2 - 3 day delivery)**

 **Europe (2 - 6 day delivery)**

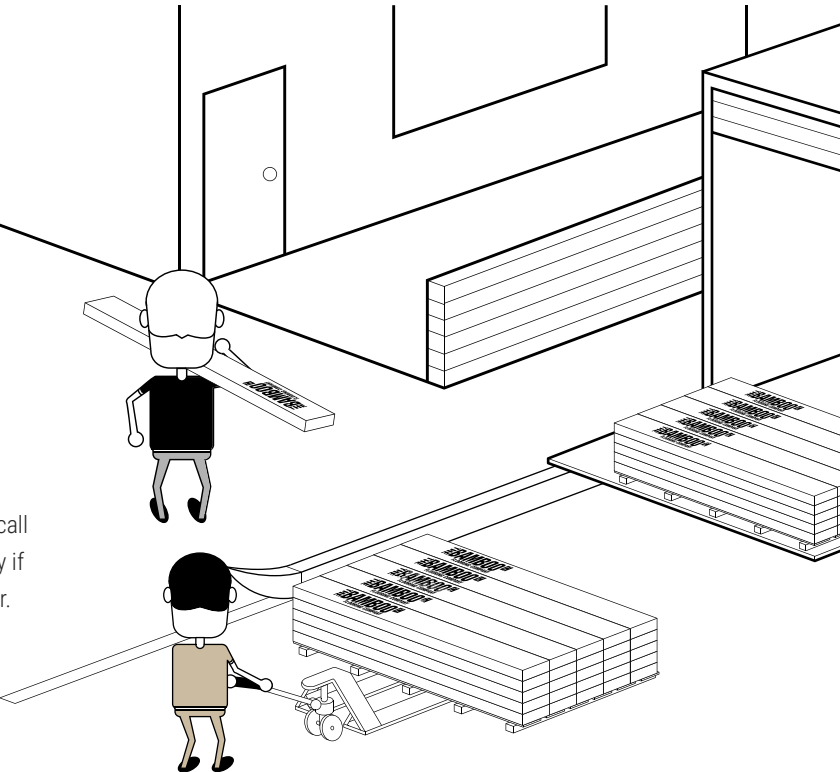

For more information visit, [www.bambooflooringcompany.com/delivery](http://www.bambooflooringcompany.com/delivery)

# Frequently Asked Questions

Our trained staff are always on hand to help.  
Call 0116 2741050 or alternatively send us an email to our technical team to [mail@bambooflooringcompany.com](mailto:mail@bambooflooringcompany.com).

## Is bamboo flooring compatible with underfloor heating?

Yes, all of our solid Uniclic®, engineered and parquet block bamboo floors are fully compatible with underfloor heating. When laying the bamboo flooring a specifically designed underfloor heating underlay can be used or you can adhere the boards directly to the subfloor using a flexible flooring adhesive. All products are very stable and can be used with both wet and electric types, providing the temperature levels are kept within the flooring manufacturers guidelines.

## Can I use bamboo flooring in a bathroom?

No, we cannot recommend any of our bamboo flooring for bathroom use as they are not 100% waterproof. However, many customers do install in bathrooms without any problems. If you do decide to install bamboo flooring into a bathroom it is best to seal all the joints with WPVA glue and once fitted run clear silicone sealant around the outside to stop any water getting into the joints.

## Can you sand bamboo flooring?

Yes, all of our bamboo floors can be sanded down. If the flooring is stained then you will need to reapply the stain once sanded and then seal with a lacquer to ensure it is protected. Our carbonised floors are not stained but smoked, so the colour will be the same all the way through the board, eliminating the need to reapply a stain but a lacquer will still need to be applied to the surface.

To read the full list of FAQs, visit [www.bambooflooringcompany.com/help](http://www.bambooflooringcompany.com/help)

## Do I need to treat bamboo flooring?

All of our bamboo floors are pre-finished and fully protected from wear and tear. If after years of heavy use your floor is starting to look tired then you will need to sand back all of the surface lacquer before applying at least two coats of new lacquer. This will bring your bamboo flooring back to its former glory and ensure many more years of use.

## Can I float solid bamboo flooring over underlay?

Yes, both solid and engineered bamboo flooring can be floated over an underlay. Floating a floor is one of the quickest and easiest methods of installation. When installing any bamboo floor it is essential that the subfloor is checked and well prepared. It must be flat, level and dry before floating a bamboo floor over an underlay. Various types of underlay can be used, including sound proofing underlays, thermal barriers and special low tog underlays that can be used with an underfloor heating system.

## Can I install bamboo flooring in a kitchen?

Yes, all of our bamboo flooring is extremely versatile and can be installed in a kitchen. Bamboo makes a very stable and durable floor covering, so it is able to withstand small fluctuations in humidity, temperature, and moisture, which are all expected in a location such as a kitchen.



# Come & visit us today!



## Leicester Showroom

Unit 5, Euston Street,  
Freemens Common,  
Leicester LE2 7ST

### Opening times:

Mon - Fri, 8am - 5:30pm,  
Sat, 9am - 1pm



## London Display

The Building Centre,  
Store Street,  
London WC1E 7BT

Open to the public 6 days a  
week. Flooring and samples  
available on display.



## Swindon Display

National Self Build & Renovation Centre,  
Lydiard Fields, Great Western Way,  
Swindon SN5 8UB

Open to the public 6 days a week.  
Flooring on display, no samples  
available.



Shop securely online at  
[www.bambooflooringcompany.com](http://www.bambooflooringcompany.com)



**Ambience**  
HARDWOOD FLOORING  
EST. 2004

For quality hardwood flooring visit our sister site  
at [www.ambiencehardwoodflooring.co.uk](http://www.ambiencehardwoodflooring.co.uk)

## Contact Us

0116 2741050

[www.bambooflooringcompany.com](http://www.bambooflooringcompany.com)

[mail@bambooflooringcompany.com](mailto:mail@bambooflooringcompany.com)

The colour samples and photography in this brochure are reproduced as accurately as printing will allow.  
Flooring colours may appear differently depending on the shape, size and lighting of a room.

© 2024 The Bamboo Flooring Company

## Follow Us



@bambooflooringuk



@bambooflooringc



/bambooflooringcompany