



## Brutal 90 days UV

**Usage:**  
Interior and exterior

**Removal time:**  
up to 90 days

**Type of adhesive:**  
Acrylic glue

**Adhesive strength:**  
4

**Material:**  
Washi paper

Tape made of handmade washi paper, originally from Japan. It is ideal for all interior and exterior work. It doesn't bleed through, so drawing sharp edges is very easy to do. UV and water resistance give it the performance to be used in different temperature and climate conditions. It tolerates high pressures and temperatures, so it can be used in the chamber. Removal without adhesive residue for up to 90 days. Highly professional tape. Paper extremely thin but strong. Water-based acrylic glue.

CODE	BARCODE	WIDTH	LENGTH
BW3033	8605043408374	30mm	33m
BW4833	8605043408398	48mm	33m

## Sensitive 21 day UV

**Usage:**  
Interior and exterior

**Removal time:**  
up to 21 days

**Type of adhesive:**  
Acrylic glue

**Adhesive strength:**  
1

**Material:**  
Washi paper

Tape made of handmade washi paper. Originally from Japan. It is ideal for surfaces that require special attention, such as wallpaper, freshly painted walls, painted walls, kitchen elements. The tape has a fine acrylic adhesive that can remain on sensitive surfaces for up to 21 days, after which it is removed without any adhesive residue or damage. Extremely thin but strong, it gives the possibility to immediately see imperfections on the treated surface. UV resistant and water repellent. It is easily bendable and can be written on.

CODE	BARCODE	WIDTH	LENGTH
SENW3033	8605043407841	30mm	33m
SENW4833	8605043408312	48mm	33m

## Universal Strong

**Usage:**  
Interior and exterior

**Removal time:**  
5 days

**Type of adhesive:**  
Natural rubber

**Adhesive strength:**  
4

**Material:**  
Crepe paper

Crepe paper tape intended for application where strenght of adhesion is needed. The special paper and adhesive formula gives this tape excellent adhesive properties on surfaces such as wood, metal, and glass. High temperature and atmospheric conditions resistance gives this tape a wide application range, including the car painting industry. The tape has optimal performance within 5 days of application. Upon removal within the recommended time frame, the tape does not tear or leave glue residue. Color: Yellow

CODE	BARCODE	WIDTH	LENGTH
STRONG1833	8605043408190	18mm	33m
STRONG2433	8605043408206	24mm	33m
STRONG3033	8605043408213	30mm	33m
STRONG3633	8605043408220	36mm	33m
STRONG4833	8605043408237	48mm	33m

## Wooden Floors

**Usage:**  
For interior work

**Removal time:**  
3 days

**Type of adhesive:**  
Natural rubber

**Adhesive strength:**  
4

**Material:**  
Crepe paper

Specially developed to ensure wooden surface protection masking throughout the duration of indoor construction/ decoration/renovation jobs. More resistant to abrasion, wear & tear, water, paint than regular masking tapes. Can be applied to wooden floors, doors, windows, and furniture. Leaves no glue residue upon removal after up to 3 days. Adhesive type: Natural rubber. Color: Yellow.

CODE	BARCODE	WIDTH	LENGTH
PK3033	8605043406455	30mm	33m
PK4833	8605043406899	48mm	33m

## Decorative Line

**Usage:**  
For interior work

**Removal time:**  
2 days


**Type of adhesive:**  
Natural rubber

**Adhesive strength:**  
3

**Material:**  
Crepe paper

Intended for projects involving decorative techniques, contours, and sharp lines with no paint bleed. Type of adhesive: Solvent (natural rubber), high quality adhesion without leaving glue residue upon removal. It's ideal for decorative techniques, especially for combining several techniques. Elastic paper gives the tape the ability to be used on rounded surfaces or placed at angles for contours. Resistance to temperature up to 80°C. Total thickness: 120µm. Standard adhesive strength. Recommended time before removal 48h. Color: Green

CODE	BARCODE	WIDTH	LENGTH
PLK1833	8606017656319	18mm	33m
PLK2433	8606017656326	24mm	33m
PLK3033	8606017656333	30mm	33m
PLK3633	8606017656340	36mm	33m
PLK4833	8606017656357	48mm	33m

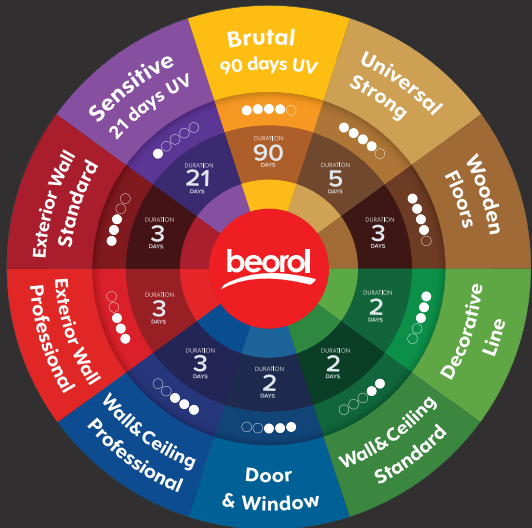

# Masking tapes



## Wall & Ceiling Standard

### Usage:

For interior work

### Removal time:

2 days

### Type of adhesive:

Solvent glue

### Adhesive strength:

2

### Material:

Crepe paper

Intended for quick & low demanding tasks involving interior wall & ceiling masking. The type of adhesive is solvent that ensures quality adhesion without leaving glue marks upon removal. Basic level of adhesion strength. The recommended time for removing the tape off the surface is 24h. Total thickness is 125µm. Resistance to temperature 70°C. Color: White

CODE	BARCODE	WIDTH	LENGTH
MK1833	8606102760402	18mm	33m
MK2433	8606102760419	24mm	33m
MK3033	8606102760426	30mm	33m
MK3633	8606102760433	36mm	33m
MK4833	8606102760440	48mm	33m



## Wall & Ceiling Professional

### Usage:

For interior work

### Removal time:

3 days

### Type of adhesive:

Natural rubber

### Adhesive strength:

3

### Material:

Crepe paper

Intended for indoor painting projects involving wall & ceiling masking. Type of glue is solvent (natural rubber) that ensures quality adhesion, without leaving glue marks upon removal. Standard level of adhesion strength. Recommended time for removal is up to 72h. Total thickness is 135µm. Resistance to temperature 80°C. Color: White

CODE	BARCODE	WIDTH	LENGTH
BK1833	8606102760501	18mm	33m
BK2433	8606102760518	24mm	33m
BK3033	8606102760525	30mm	33m
BK3633	8606102760532	36mm	33m
BK4833	8606102760549	48mm	33m



## Door & Window

### Usage:

For interior work

### Removal time:

2 days

### Type of adhesive:

Natural rubber

### Adhesive strength:

3

### Material:

Crepe paper

Purpose: protection of PVC and Aluminum doors and windows upon interior projects. Type of adhesive: Solvent (natural rubber), high quality adhesion without leaving glue residue on doors and windows upon removal . It does not leave glue marks. Slightly elastic paper allows placing the tape in all corners and joints. The tape is easy to tear by hand. Standard adhesive strength. Total thickness: 130µm. Recommended removal time off the surface is 48h. Resistance to temperature up to 80°C. Color: Blue.

CODE	BARCODE	WIDTH	LENGTH
DK1833	8606017656265	18mm	33m
DK2433	8606017656272	24mm	33m
DK3033	8606017656289	30mm	33m
DK3633	8606017656296	36mm	33m
DK4833	8606017656302	48mm	33m



## Exterior Wall Professional

### Usage:

For exterior work

### Removal time:

3 days

### Type of adhesive:

Natural rubber

### Adhesive strength:

4

### Material:

Crepe paper

Intended for outdoor projects involving surface painting or facade application. The advanced adhesive formula ensures professional grade performance. Type of glue is solvent (natural rubber) that ensures quality adhesion without leaving glue marks upon removal. It is recommended to be used on various types of surfaces (walls, plasterboards, wood, PVC, metal). Advanced adhesive strength. Recommended removal time off the surface is 72h. The total thickness of the tape is 145µm. Resistance to temperature up to 90°C. Color: Brown

CODE	BARCODE	WIDTH	LENGTH
PROK1833	8606017656210	18mm	33m
PROK2433	8606017656227	24mm	33m
PROK3033	8606017656234	30mm	33m
PROK3633	8606017656241	36mm	33m
PROK4833	8606017656258	48mm	33m



## Exterior Wall Standard

### Usage:

For exterior work

### Removal time:

3 days

### Type of adhesive:

Natural rubber

### Adhesive strength:

3

### Material:

Crepe paper

Intended for outdoor projects involving surface painting or facade application. Type of glue is solvent (natural rubber) that ensures quality adhesion without leaving glue marks upon removal. It is recommended to be used on various types of surfaces (walls, plasterboards, wood, PVC, metal). Standard adhesive strength. Recommended removal time off the surface is 72h. The total thickness of the tape is 145µm. Resistance to temperature up to 80°C. Color: Yellow

CODE	BARCODE	WIDTH	LENGTH
FASK1833	8606017657316	18mm	33m
FASK2433	8606017657323	24mm	33m
FASK3033	8606017657330	30mm	33m
FASK3633	8606017657347	36mm	33m
FASK4833	8606017657354	48mm	33m

For optimum performance, ensure that the tape application surface is clean and dry, without dust, grease, or other substances. All end users are advised to evaluate using our products for each individual use and consider the full product specification in comparison.

