



Qu-Air Black FR
fire rated to B-s1-d0

Application Examples

Air and driving raintight finish for:

- Joinery (aluminium, Wood, PU, PVC)
- Curtain walls
- Frames
- OSB
- Façade Claddings
- Fire rated to B-s1-d0

Qu-Air Pro
(High Tack)

Application Examples

Air and driving raintight finish for:


- Joinery (aluminium, Wood, PU, PVC)
- Precast Sandwich Panels
- ICF Blocks
- Curtain Walls
- Frames
- OSB
- Façade Claddings

Advantages

- Vapour Open
- Driving rain and windproof surface
- Black Surface
- Increased fire resistance
- 10 year guarantee on UV resistance for open façade membrane with max.40% joints and a max.joint width of 50mm
- Very powerful, self-adhesive surface
- No construction adhesive required =>very fast and cost-efficient installation
- Self-adhesive performance largely built up after 60 minutes
- Easy installation possible, even on difficult substrates

Advantages

- Vapour Open
- Plasterable
- Driving rain and windproof surface
- Black Surface
- Very powerful, self-adhesive surface
- No construction adhesive required =>very fast and cost-efficient installation
- Self-adhesive performance largely built up after 60 minutes
- Full adhesive strength achieved after approximately 3 days
- Easy installation possible, even on difficult substrates

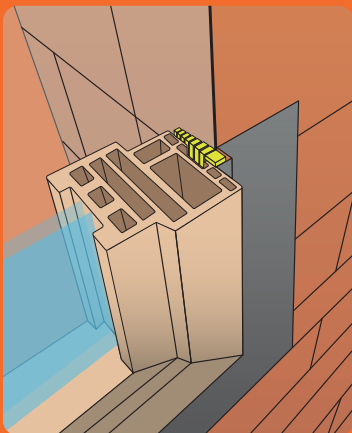

QU-AIR UV PROTECTION TAPE

Single sided tape treated with UV film coating. 2 year UV resistance – ideal for over cladding, sealing of form works and roofs (inside and out), up to -10°C. Airtight connections between vapour barriers and taping cracks between insulation panels. Sizes cut to width from 30mm > 1500mm x 25m rolls.



EXPANDING,
JOINING,
SEALING,
GET THAT
PANDA HUGGIN'
FEELING.



- ✓ WATER TIGHT
- ✓ AIR TIGHT
- ✓ ACOUSTIC INSULATION
- ✓ THERMAL INSULATION



For more information and your free sample call us. 01440 710747 

EPDM ADHESIVE

For bonding and sealing EPDM in facades and on the most commonly used building materials such as aluminium, mineral surfaces, steel, wood and overlaps between EPDM sheets.



SELF ADHESIVE EPDM 0.75MM X 25M

EPDM with an acrylic adhesive layer. Excellent resistance to UV and aging, long term watertightness, recyclable and solvent free. Developed for bonding and sealing most common building materials. Roll widths cut to size.



XPANDA – EXPANDING FOAM TAPE

BBA Approved Xpanda 600 – Pre compressed open cell polyurethane foam backed roll with a self- adhesive tape. Expands to fill gaps and adapts to uneven surfaces, providing long term thermal and acoustic insulation.

