




FIRESIST CLAD®
A2,S1-DO FIRE RATED ALUMINIUM PANELS

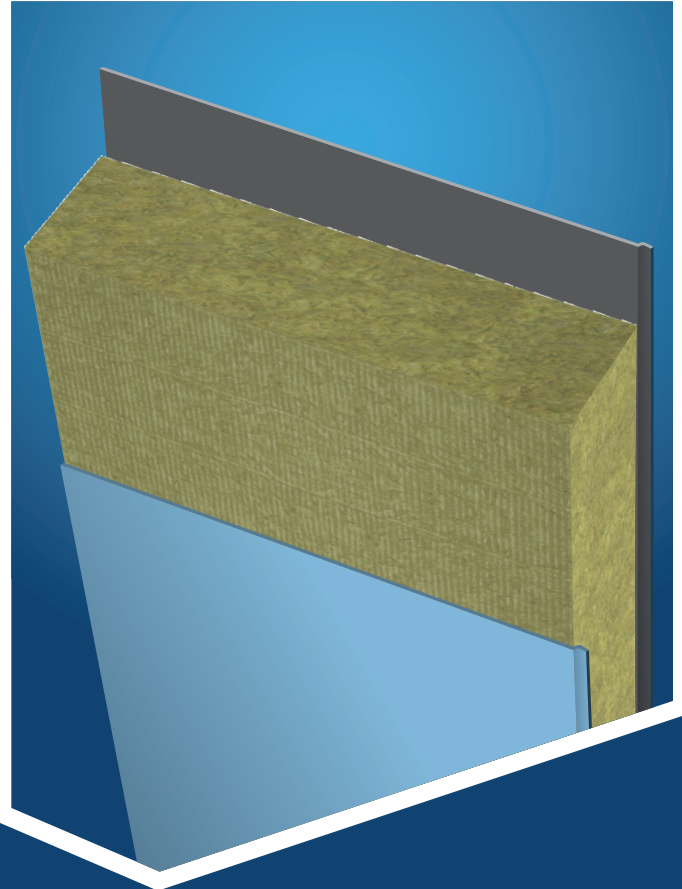

Firesist Clad®

Firesist Clad® meets UK Building Regulations and achieves an A2-S1,d0 classification.

As a UK leading specialist in aluminium fabrication, CPPL can offer the glazing industry Firesist Clad®, a fully-compliant Aluminium Insulated Panel that achieves A2-S1,d0 classification and meets UK Building Regulations for the use of Aluminium Insulated Panels.

To achieve this classification, Firesist Clad® underwent testing against the EN ISO 1716:2018 and EN 13823:2020 standards at the independent System Laboratories UK Ltd.

- **Panel Use:** Firesist Clad® can be used where the building requirements are for an A2,S1-d0 Aluminium Panel
- **Fire Safety Standard:** EN13501-1:2018 (achieving A2-S1, d0 classification)
- **Aluminium Skin Thickness:** 1.5mm, 2mm, or 3mm
- **Panel Thickness:** Ranging from 28mm to 100mm
- **Insulation Core:** 160kg/m³ Nexus Lamella insulation
- **PPC Colours:** All colour ranges
- **Optional Edging:** Promat range
- **Adhesive:** Polyurethane Adhesive



For more information about working with CPPL, contact us today.

Call **01604 810 012** or e-mail **sales@cppluk.com**

Alternatively, visit our website for more in-depth information about our range of products and services at **cppluk.co.uk**



9-11 White House Industrial Estate, Main Road, Earls Barton, Northampton, NN6 0HJ