

# TERMOMETERS FOR HACCP COMPLIANCE

Specialists in the design & manufacture of  
temperature measuring equipment since 1983

HACCP  
✓

eti

20  
26



# THERMAPEN® ONE THERMOMETER

- Reaches temperature in just ONE second
- 5-year guarantee
- Waterproof to IP67
- Auto-intelligent backlit display

The Thermapen ONE is the ultimate kitchen thermometer. Quick, accurate and easy-to-use, measuring temperature over the range of -49.9 to 299.9 °C.

## Unrivalled speed and accuracy

The Thermapen One is currently the fastest instant-read thermometer on the market, reading temperatures in just one second. Accurate to  $\pm 0.3$  °C (-19.9 to 119.9 °C)  $\pm 0.4$  °C (-49.9 to 199.9 °C) otherwise  $\pm 1.0$  °C.

## Designed for kitchen professionals

Designed using industry leading thermocouple technology, the Thermapen One features a patented self-rotating display that can be used with either hand in any position. Its intelligent backlit display is improved with a cool white LCD that senses varying light levels, automatically turning the backlight on and off. The unit also comes with a motion-sensing sleep mode that maximises battery life by automatically turning the device on and off when set down or picked up. Powered by a single AAA battery, the device has a life expectancy of 2,000 hours in normal use, without the backlight. Both low battery (icon) and open circuit indication are displayed, when applicable. The casing is washable and includes Biomaster product protection that reduces bacterial growth.

The Thermapen One is waterproof to IP67 and incorporates a reduced tip, stainless steel, penetration probe that conveniently folds back through 180° into the side of the instrument when not in use.

Each Thermapen One is supplied with a FREE traceable certificate of calibration and 5-year guarantee.



Patented 360° auto-rotating display

Improved  $\pm 0.3$  °C accuracy

ONE second response time due to improved thermocouple technology



Bluetooth®

model available -  
see our website for details.

ACCESSORIES  
see page 5



Specification	Thermapen One
Range	-49.9 to 299.9 °C
Resolution	0.1 °C or 1 °C - user selectable
Accuracy	$\pm 0.3$ °C (-19.9 to 119.9 °C) $\pm 0.4$ °C (-49.9 to 199.9 °C) otherwise $\pm 1.0$ °C
Battery	1 x 1.5 volt AAA
Battery life	2,000 hours (without backlight)
Sensor type	K thermocouple
Display	14.3 mm (horizontal) & 11.85 mm (vertical) LCD
Dimensions	19.3 x 48.2 x 156.2 mm
Weight	115 grams
FREE traceable certificate of calibration included	

Order code	Description	£ each
235-407	Thermapen One - grey	65.00
235-417	Thermapen One - white	65.00
235-427	Thermapen One - yellow	65.00
235-437	Thermapen One - green	65.00
235-447	Thermapen One - red	65.00
235-457	Thermapen One - blue	65.00
235-477	Thermapen One - black	65.00
235-487	Thermapen One - orange	65.00
235-497	Thermapen One - pink	65.00
235-507	Thermapen One - purple	65.00
830-130	Thermapen pouch - charcoal grey	6.80
830-131	Thermapen pouch - beige	6.80
830-140	Thermapen holster - charcoal grey	5.80
830-141	Thermapen holster - beige	5.80
830-455	Silicone cover - glow in the dark	10.00
830-470	Thermapen magnetic band with lanyard	5.50
832-002	Stainless steel wall bracket	13.00

# THERMAPEN® CLASSIC THERMOMETER

- Over 50 % faster than traditional probes
- Reaches temperature in just 3 seconds
- FREE traceable certificate of calibration
- Lightweight and easy-to-use

The Thermapen Classic thermometer incorporates a large digital display with a precise read-out of temperature over the range of -49.9 to 299.9 °C with a 0.1 °C resolution and an accuracy of  $\pm 0.4$  °C. The resolution can be switched to 1 °C, if required, via a switch in the battery compartment. The thermometer will power off automatically after ten minutes, maximising battery life. This feature can be disabled if not required.



The casing is washable and includes Biomaster product protection that reduces bacterial growth and the ergonomic rubber seal minimises the risk of the ingress of water, dust or food. The Thermapen Classic also benefits from being splashproof. The true temperature of a product can be tested in just three seconds. The Thermapen Classic incorporates a reduced tip, stainless steel, food penetration probe (Ø3.3 x 115 mm) that conveniently folds back through 180° into the side of the instrument when not in use.

Both low battery (icon) and open circuit indication are displayed, when applicable. Each Thermapen is powered by two lithium coin cell batteries with a minimum life expectancy of 1500 hours.

- Pro-Surface Thermapen®**

The Pro-Surface Thermapen thermometer measures the temperature of grills, hotplates and other surfaces over the range of -49.9 to 299.9 °C with a user-selectable resolution of 0.1 or 1 °C.

Simply open the probe and take the reading - the pivoting probe and swivel tip ensure perfect surface contact and high accuracy measurement.



- Protective silicone cover**

Protect your instrument against accidental damage by fitting a cover



- Stainless steel wall bracket (832-002)**

Stores the Thermapen safely when not in use. Keyhole slot for hanging (screws not supplied) Measures 27 x 58 x 115 mm



Specification	Thermapen Classic/Pro-Surface
Range	-49.9 to 299.9 °C
Resolution	0.1 °C or 1 °C - user selectable
Accuracy	$\pm 0.4$ °C (-49.9 to 199.9 °C) otherwise $\pm 1$ °C*
Battery	2 x 3 volt CR2032 lithium coin cell
Battery life	1,500 hours
Sensor type	K thermocouple
Display	14.5 mm LCD
Dimensions	19 x 47 x 153 mm
Weight	97 grams

\* Pro-Surface Accuracy:  $\pm 0.4$  °C (-49.9 to 149.9 °C) or  $\pm 1$  %  
FREE traceable certificate of calibration included

# THERMAPEN® IR THERMOMETER

- Patented, automatic 360° rotational display
- Adjustable emissivity for different surfaces

The Thermapen IR combines two advanced ETI products: the RayTemp 2 infrared thermometer and the Thermapen thermometer. Available in red and white.

Housed in a durable PC/ABS case with Biomaster product protection to reduce bacterial growth, it features a motion-sensing sleep mode that conserves battery life by turning the instrument on or off when picked up or set down.

The thermometer has a target ratio of 5:1, so should be positioned as close to the target as possible for accurate readings. The default emissivity is 0.95, but can be adjusted between 0.1 and 1 via the mode button where can also access max/min temperature function.

When the penetration probe is open, the thermometer will read internal temperatures using the probe. When the probe is closed, simply press the scan button to display the surface temperature.

Order code	Description	£ each
228-065	Thermapen IR - white	95.00
228-045	Thermapen IR - red	95.00
228-114	Thermapen IR with air probe	100.00
830-480	Protective silicone cover	9.00
830-001	Zip pouch	6.80
832-002	Stainless steel wall bracket	13.00
830-485	Silicone cover - glow in dark	11.50



model available -  
see our website  
for details.



Thermapen IR  
with air probe  
(228-114)

Specification	Thermapen IR
Range - infrared	-49.9 to 349.9 °C
Range - probe	-49.9 to 299.9 °C
Resolution	0.1 or 1 °C/F - user selectable
Accuracy - infrared	±1 °C (0 to 100 °C) otherwise ±2 °C or ±2 % of reading whichever is greater
Accuracy - probe	±0.4 °C (-49.9 to 199.9 °C) otherwise ±1 °C
Field of view	Target ratio 5:1
Emissivity	0.95 default - adjustable 0.1 to 1
Battery	2 x 3 volt CR2032 lithium coin cell
Battery life	1,000 hours - continuous use
Display	12 mm (horizontal) & 10 mm (vertical) LCD
Dimensions	19 x 50 x 157 mm
Weight	125 grams
FREE traceable certificate of calibration included (probe & IR)	

## THERMAPEN® ACCESSORIES

### • Magnetic band with lanyard

Keep your Thermapen safe and on hand in the kitchen with a magnetic attachment for easy storage on metal surfaces (830-470).



Holster 75 x 190 mm  
(830-140/141)



### • Thermapen pouches & holsters

Embossed with the Thermapen logo, these accessories combine style and durability. For more details visit our website.



Pouch 40 x 75 x 170 mm  
(830-130/131)

Order code	Description	£ each
830-130	Thermapen pouch - charcoal grey	6.80
830-131	Thermapen pouch - beige	6.80
830-140	Thermapen holster - charcoal grey	5.80
830-141	Thermapen holster - beige	5.80
830-260	Protective silicone cover	7.00
830-265	Silicone cover - glow in the dark	9.50
830-470	Thermapen magnetic band with lanyard	5.50
832-002	Stainless steel wall bracket	13.00

## GOURMET THERMOMETER

- CalCheck 0.0 °C function
- $\pm 0.5$  °C accuracy

The water-resistant Gourmet folding probe thermometer is easy-to-use, and ideal for monitoring cooking, cooling and food holding temperatures as part of HACCP and health and safety procedures. The unit incorporates two moulded push buttons (on/off and hold) and a CalCheck function that allows the user to verify the accuracy of the thermometer at any time.

Each unit incorporates a stainless steel, food penetration probe ( $\varnothing 3.5 \times 110$  mm) that conveniently folds back into the side of the instrument when not in use. The housing includes Biomaster product protection that reduces bacterial growth. Available in five colours, ideal for different food types or preparation areas.

Order code	Description	£ each
810-730	Gourmet thermometer - white	22.00
810-732	Gourmet thermometer - yellow	22.00
810-733	Gourmet thermometer - green	22.00
810-734	Gourmet thermometer - red	22.00
810-735	Gourmet thermometer - blue	22.00
830-110	Protective wallet	5.80
830-001	Zip pouch	6.80
832-002	Stainless steel wall bracket	13.00



### Specification Gourmet

Range	-39.9 to 149.9 °C
Resolution	0.1 °C/°F
Accuracy	$\pm 0.5$ °C (-39.9 to 124.9 °C)
Battery	3 volt CR2032 lithium coin cell
Battery life	5,000 hours
Sensor type	Thermistor
Display	16 mm LCD
Dimensions	20 x 52 x 155 mm
Weight	83 grams

## THERMALITE® DIGITAL THERMOMETER

- $\pm 0.5$  °C accuracy
- FREE traceable certificate of calibration

The ThermaLite digital thermometer is lightweight and easy to use, ideal for measuring the temperature of food and semi-solid materials.

The instrument displays temperature over the range of -40 to 300 °C with a 0.1 °C/°F resolution and an accuracy of  $\pm 0.5$  °C (-10 to 100 °C). Each ThermaLite also incorporates a CalCheck function that allows the user to verify the accuracy of the thermometer at any time.

The thermometer features a clear, easy-to-read LCD display with an open circuit 'Err' and battery replacement indication. The auto power-off facility turns the instrument off automatically after ten minutes, maximising battery life and is supplied complete with a FREE traceable certificate of calibration.

Each unit is supplied with a protective probe cover and is waterproof to IP66.

- $\varnothing 2.0 \times 14$  mm Reduced tip for faster and more accurate readings

Order code	Description	£ each
810-305	ThermaLite thermometer	30.00



### Specification ThermaLite

Range	-40 to 300 °C
Resolution	0.1 °C/°F
Accuracy	$\pm 0.5$ °C (-10 to 100 °C)
	$\pm 2.5$ °C (200 to 300 °C)
	$\pm 1.5$ °C otherwise
Battery	3 volt CR2032 lithium coin cell
Battery life	2,000 hours
Sensor type	Thermistor
Display	25 x 23.5 mm LCD
Dimensions	22 x 36.3 x 223 mm
Probe dimensions	$\varnothing 3.3 \times 85$ mm (probe tip $\varnothing 2.0 \times 14$ mm)
Weight	67 grams

FREE traceable certificate of calibration included

# SIZZLE THERMOMETER

- 180° auto-rotating display and 270° rotating probe
- Rear magnet
- Waterproof to IP67
- Bright backlight

The new Sizzle thermometer is a digital instant-read, waterproof, folding probe thermometer designed to deliver accurate readings in three seconds. It measures temperature over the range of -50 to 300 °C and is accurate to  $\pm 0.5$  °C (-20 to 120 °C) otherwise  $\pm 2.0$  °C.

The unit features a large 180° auto-rotating display and a 270° rotating probe for easy readings in either hand, and it boasts a super bright backlight for clear visibility anywhere. The screen will automatically switch on/off when opening or closing the probe and when the instrument is picked up or set down. This maximises the battery life.

The magnetic back allows the user to position the sizzle on a fridge, oven or grill. The unit also has customisable settings to adjust resolution, sleep timer, and calibration trim.

The Sizzle is waterproof to IP67 and is supplied with a FREE traceable certificate of calibration.



NEW



- **Magnetic back**

Store on a fridge, oven or BBQ for quick and easy access.



Order code	Description	£ each
810-704	Sizzle - red	40.00
810-713	Sizzle - stone	40.00
810-715	Sizzle - midnight blue	40.00

Specification	Sizzle
Range	-50 to 300 °C
Resolution	0.1 °C or 1 °C - user selectable
Accuracy	$\pm 0.5$ °C (-20 to 120 °C) otherwise $\pm 2.0$ °C
Battery	2 x 1.5 volt AAA
Battery life	5,000 hours (without backlight)
Sensor type	Thermistor
Display	24 x 40 mm
Dimensions	18 x 41 x 159 mm
Probe dimensions	$\varnothing 3.0 \times 110$ mm (probe tip $\varnothing 1.6 \times 17$ mm)
Weight	98 grams
<b>FREE traceable certificate of calibration included</b>	

# FOOD CHECK THERMOMETER & PROBE

- Ideal for HACCP procedures
- FREE traceable certificate of calibration

The Food Check is designed specifically for the food and catering professional. The thermometer will measure temperature quickly and accurately when monitoring cooked and chilled foods as part of HACCP and health and safety procedures.

The unit features a large, easy-to-read, LCD display with open circuit and low battery indication. The Food Check will power-off automatically after ten minutes, maximising battery life.

Each Food Check is supplied with a permanently attached food penetration probe with a 130 mm stainless steel stem and 500 mm PVC lead.

Order code	Description	£ each
221-018	Food Check - white	79.00
221-028	Food Check - yellow	79.00
221-038	Food Check - green	79.00
221-048	Food Check - red	79.00
221-058	Food Check - blue	79.00
830-221	Protective silicone cover - white*	8.00
832-050	S/steel wall bracket & cover	17.00

\*Various colours available. See website for details.



Specification	Food Check
Range	-49.9 to 299.9 °C
Resolution	0.1 °C
Accuracy	±0.4 °C (-49.9 to 149.9 °C) otherwise ±1 %
Battery & life	3 x 1.5 volt AAA - 10,000 hours
Sensor type	K thermocouple
Display	12 mm LCD
Dimensions	25 x 56 x 128 mm
Weight	160 grams

FREE traceable certificate of calibration included

# THERMAMITE® THERMOMETER & PROBE

- Includes Biomaster product protection
- Simple one-button operation

The Thermamite thermometer offers accuracy, flexibility and ease of use, coupled with the durability and reliability that is required by the food and catering industry in helping to meet today's food hygiene legislation.

The instrument is housed in an ergonomic, robust ABS case that includes Biomaster product protection which reduces bacterial growth. Each unit is supplied with a permanently attached, pointed stainless steel food penetration probe (Ø3.3 x 100 mm) and a 500 mm PVC lead.

Available in five different colours, ideal for different food types or preparation areas, that can help avoid cross contamination.

Order code	Description	£ each
261-010	Thermamite - white	69.00
261-020	Thermamite - yellow	69.00
261-030	Thermamite - green	69.00
261-040	Thermamite - red	69.00
261-050	Thermamite - blue	69.00
830-221	Protective silicone cover - white*	8.00
832-050	S/steel wall bracket & cover	17.00

\*Various colours available. See website for details.



Specification	Thermamite
Range	-50 to 300 °C
Resolution	1 °C
Accuracy	±1 °C / 1 % of reading
Battery & life	3 x 1.5 volt AAA - 10,000 hours
Sensor type	K thermocouple
Display	12 mm LCD
Dimensions	25 x 56 x 128 mm
Weight	160 grams

FREE traceable certificate of calibration included

# CATERTEMP® THERMOMETER & PROBE

- High system accuracy  $\pm 0.4$  °C & 0.1 °C resolution
- FREE traceable certificate of calibration

The CaterTemp professional digital thermometer is designed with the catering and food processing industry in mind and incorporates a combination of proven circuitry and durability.

Each unit is housed in a robust ABS case that includes Biomaster product protection which reduces bacterial growth.

The instrument features a bright, easy-to-read LCD, displaying open circuit and low battery indication, when applicable. Each CaterTemp is supplied with a permanently attached food penetration probe with a 130 mm pointed, stainless steel stem and one metre coiled PU lead.

- Protective silicone cover. Various colours are available - see website for details.



Order code	Description	£ each
221-046	CaterTemp	82.00
830-227	Protective silicone cover - black*	8.00
832-053	S/steel wall bracket & cover	17.00

\*Various colours available. See website for details.



Specification	CaterTemp
Range	-49.9 to 299.9 °C
Resolution	0.1 °C
Accuracy	$\pm 0.4$ °C (-49.9 to 149.9 °C) otherwise $\pm 1$ %
Battery & life	3 x 1.5 volt AAA - 10,000 hours
Sensor type	K thermocouple
Display	12 mm LCD
Dimensions	25 x 56 x 128 mm
Weight	175 grams

FREE traceable certificate of calibration included

## CATERTEMP® METAL THERMOMETER

- Our most durable thermometer yet
- Waterproof to IP67

The CaterTemp Metal thermometer is housed in a robust extruded aluminium waterproof case, offering IP67 protection, with a white powder coated finish. Designed for reliability and ease of use in day-to-day catering and food processing applications.

The CaterTemp Metal thermometer measures temperature over the range of -49.9 °C to 299.9 °C and features a large, easy to read, LCD display.

Each unit is supplied with a permanently attached, water-resistant, heavy duty, food penetration probe with a Ø3.3 x 130 mm stainless steel stem and one metre PU coiled lead. The probe is both strong, versatile and suitable for a variety of applications including liquids, semi-solids and granular materials.

Order code	Description	£ each
221-800	CaterTemp Metal	135.00
832-789	Stainless steel wall bracket	13.00



Specification	CaterTemp Metal
Range	-49.9 °C to 299.9 °C
Resolution	0.1 °C
Accuracy	$\pm 0.4$ °C (-49.9 to 149.9 °C) or otherwise $\pm 1$ %
Battery & life	3 x AAA - 10,000 hours @ 25°C
Sensor type	K thermocouple
Display	12 mm LCD
Dimensions	37 x 61.4 x 177 mm
Weight	325 grams

FREE traceable certificate of calibration included

## THERMA 20 METAL THERMOMETER

- Extruded aluminium case for superior durability
- Waterproof to IP67

The Therma 20 Metal waterproof thermometer offers IP67 protection and is housed in a robust extruded aluminium case. The thermometer utilises state of the art electronic circuitry, designed for reliability and ease of use and can be submerged or washed under a running tap - ideal for food processing applications where cleaning is paramount.

The Therma 20 Metal thermometer measures temperature over the range of -39.9 °C to 149.9 °C with a 0.1 °C resolution. The unit has a large, easy-to-read LCD display and an auto-power-off function.

The instrument incorporates an easy-to-use waterproof Lumberg screw-locking type connector, allowing a wide range of interchangeable thermistor probes to be used. We offer an extensive range of probes, see our website for details.

Order code	Description	£ each
221-700	Therma 20 Metal	130.00
832-789	Stainless steel wall bracket	13.00
174-266	Penetration probe	43.50

The Therma 20 Metal is exclusive of probe



Specification	Therma 20 Metal
Range - thermistor	-39.9 °C to 149.9 °C
Resolution	0.1 °C
Instrument only accuracy	±0.2 °C ±0.1 % of reading
System accuracy	±0.5 °C (-24.9 to 109.9 °C) otherwise 1 °C
Battery & life	3 x 1.5 volt AAA - 10,000 hours @ 25 °C
Sensor type	Thermistor
Display	15 mm LCD
Dimensions	37 x 61.4 x 177 mm
Weight	242 grams

FREE traceable certificate of calibration included

## THERMA K METAL THERMOMETER

- Interchangeable thermocouple probes
- Wide temperature range -99.9 to 1372 °C

The Therma K Metal handheld thermometer is designed for reliability and ease of use in day-to-day catering and food processing applications. It has a sturdy waterproof case with a white powder coated finish and provides IP67 protection.

The thermometer features a large LCD display and measures temperature over the range of -99.9 to 1372 °C, -99.9 to 999.9 with a 0.1 °C resolution, auto-ranging to 1 °C resolution over the range of 1000 to 1372 °C. It also has an auto-power-off feature that turns the unit off after ten minutes to maximise battery life.

The unit has a thermocouple probe socket located at the top of the instrument, allowing for a wide range of interchangeable, thermocouple type K probes to be connected to the instrument. We offer an extensive range of probes, see our website for details.

Order code	Description	£ each
221-900	Therma K Metal	130.00
143-162	Penetration probe	42.00
832-789	Stainless steel wall bracket	13.00

The Therma K Metal is exclusive of probe



Penetration probe (143-162)

Specification	Therma K Metal
Range	-99.9 °C to 1372 °C
Resolution	0.1 °C to 999.9 °C then 1 °C
Accuracy (instrument only)	±0.4 °C ±0.1 % of reading
Battery & life	3 x AAA - 10,000 hours @ 25 °C
Sensor type	K thermocouple
Display	12 mm LCD
Dimensions	37 x 61.4 x 177 mm
Weight	235 grams

FREE traceable certificate of calibration included

# THERMA 20 HIGH ACCURACY THERMOMETER

- Assured accuracy for the life of the thermometer
- Meets the European Standard EN 13485
- 2-year guarantee
- Optional test caps for accuracy checks

The Therma 20 thermistor thermometer has been specifically designed for use in the catering industry with HACCP and health and safety procedures in mind.

The instrument displays temperature to 0.1 °C over the range of -39.9 to 149.9 °C with a high system accuracy of  $\pm 0.5$  °C (-24.9 to 109.9 °C). This accuracy is guaranteed for life, due to the instrument's advanced electronics. The Therma 20 features an easy-to-read, LCD display with low battery indication.

The thermometer can be used in low ambient working temperatures down to -20 °C, which meets the requirements of the European Standard EN 13485 for the temperature monitoring of food through the supply chain, from transport to storage to point of sale.

The instrument is housed in an ergonomic, robust ABS case that includes Biomaster product protection which reduces bacterial growth. The thermometer's auto-power-off facility turns the instrument off automatically after ten minutes.

The Therma 20 incorporates an easy-to-use Lumberg screw-locking connector, allowing both a wide range of interchangeable thermistor probes and self-calibration test caps to perform accuracy checks.



## THERMA 20 PROFESSIONAL CATERING THERMOMETER KIT

### Each kit contains:

- Therma 20 thermometer (226-040)
- Thermistor penetration probe (174-166)
- Air wire probe (170-372)
- Temperature log book (831-100)
- Box of 100 Probe Wipes (836-220)
- ABS carrying case (834-120)



model available -  
see our website for details.



Order code	Description	£ each
226-040	Therma 20	73.00
860-120	Professional catering kit	135.00
174-166	Thermistor penetration probe	37.00
286-001	Thermistor test cap -18 °C	40.00
286-002	Thermistor test cap 0 °C	40.00
286-003	Thermistor test cap 3 °C	40.00
286-004	Thermistor test cap 70 °C	40.00
286-005	Thermistor test cap 100 °C	40.00
830-221	Protective silicone cover - white	8.00
832-050	S/steel wall bracket & cover	17.00

Exclusive of probe when purchased as a unit only

Specification	Therma 20
Range	-39.9 to 149.9 °C
Resolution	0.1 °C
Instrument only accuracy	$\pm 0.2$ °C
System accuracy	$\pm 0.5$ °C (-24.9 to 109.9 °C)
Battery & life	3 x 1.5 volt AAA - 20,000 hours
Sensor type	Thermistor
Display	12 mm LCD
Dimensions	25 x 56 x 128 mm
Weight	130 grams

FREE traceable certificate of calibration included

# THERMA 22 & 22 PLUS THERMOMETERS

- Utilises thermistor or type T thermocouple probes
- Meets the European Standard EN 13485
- Includes Biomaster product protection
- FREE traceable certificate of calibration

The Therma 22 and 22 Plus thermometers accept both thermocouple and thermistor probes. The thermistor sensor gives greater accuracy whilst the type T thermocouple sensor gives a faster response with an extended measurement range.

Both units display temperature over a range of -199.9 to 400 °C (Type T thermocouple) and -39.9 to 149.9 °C (thermistor). The LCD display includes open circuit and low battery indication, and auto-power-off to maximise battery life.

Housed in an ABS case that includes Biomaster product protection, each unit also incorporates a Lumberg screw-locking type connector that supports a range of interchangeable probes. We offer an extensive range of probes, see page 13 for a select range or visit our website for our complete range.

- The Therma 22 Plus incorporates all the features of the Therma 22 thermometer, but with the addition of a backlight display, max/min memory function, hold function and is waterproof offering IP67 protection.

## THERMA 22 FOOD HYGIENE THERMOMETER KIT



Order code	Description	£ each
227-022	Therma 22*	89.00
860-125	Food hygiene kit	165.50
232-041	Therma 22 Plus*	105.00
177-166	Type T penetration probe	45.00
174-266	Thermistor penetration probe	43.50

\*Exclusive of probe when purchased as a unit only



model available -  
see our website for details.







### Each kit contains:

- Therma 22 thermometer (227-022)
- Type T penetration probe (177-166)
- Air wire probe (177-372)
- Temperature log book (831-100)
- Box of 100 Probe Wipes (836-220)
- ABS carrying case (834-120)



Specification	Therma 22	Therma 22 Plus
Range - Type T thermocouple	-199.9 to 400 °C	
Range - Thermistor	-39.9 to 149.9 °C	
Resolution	0.1 °C to 299.9 °C thereafter 1 °C	
Instrument only accuracy	±0.2 °C	
System accuracy - Type T t/c	±0.5 °C (-49.9 to 149.9 °C)	
System accuracy - Thermistor	±0.5 °C (-24.9 to 109.9 °C)	
Battery	3 x 1.5 volt AAA	
Battery life	10,000 hours	7,500 hours
Sensor type	Thermistor/Type T thermocouple	
Display	12 mm LCD	15 mm LCD
Dimensions	25 x 56 x 128 mm	32 x 71 x 141 mm
Weight	130 grams	220 grams
FREE traceable certificate of calibration included		

# NTC THERMISTOR PROBES WITH LUMBERG CONNECTOR

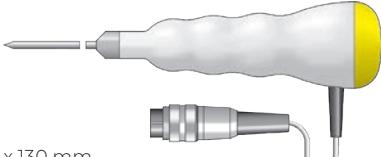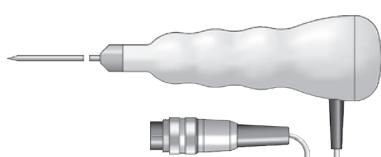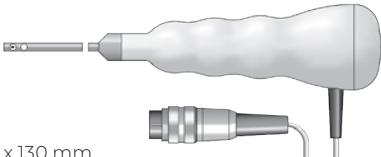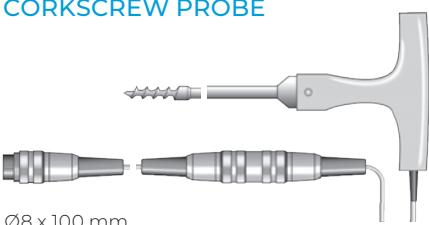		Order code	£ each
<b>PENETRATION PROBE</b>   Ø3.3 x 130 mm	<p>This stainless steel penetration probe is strong, versatile and incorporates a heavy-duty, ribbed, polypropylene handle with a colour-coded end cap. Ideal for measuring liquids, semi-solids and granular materials.</p> <ul style="list-style-type: none"> <li>● Response time less than 5 seconds</li> <li>● Probe temperature range -40 to 150 °C</li> </ul>	<span style="color: blue;">●</span> 174-161 <span style="color: black;">●</span> 174-162 <span style="color: green;">●</span> 174-164 <span style="color: red;">●</span> 174-165 <span style="color: white;">○</span> 174-166 <span style="color: yellow;">●</span> 174-167	37.00 37.00 37.00 37.00 37.00 37.00
<b>FAST RESPONSE PROBE</b>   Ø2.6 x 130 mm	<p>This stainless steel, fast response, needle penetration probe incorporates a heavy-duty ribbed, polypropylene handle. The probe is suitable for liquids and soft semi-solids including fish, fruit and other delicate materials.</p> <ul style="list-style-type: none"> <li>● Response time less than 4 seconds</li> <li>● Probe temperature range -40 to 150 °C</li> </ul>	174-100	42.00
<b>AIR OR GAS WIRE PROBE</b>   Ø3.7 x 30 mm with 1000 mm FEP lead	<p>This fast response, air or gas wire probe is ideal for measuring air temperature in chill cabinets, fridges, freezers, offices, storage areas and similar. Supplied with a one metre FEP lead.</p> <ul style="list-style-type: none"> <li>● Response time less than 2 seconds</li> <li>● Probe temperature range -40 to 150 °C</li> </ul>	170-372	23.50
<b>AIR OR GAS PROBE</b>   Ø3.3 x 130 mm	<p>This stainless steel, fast response air or gas probe incorporates a heavy-duty ribbed, polypropylene handle. The probe is ideal for measuring air temperature in refrigeration units, storage areas and other similar applications.</p> <ul style="list-style-type: none"> <li>● Response time less than 2 seconds</li> <li>● Probe temperature range -40 to 150 °C</li> </ul>	174-300	38.50
<b>FOIL BETWEEN PACK PROBE</b>   40 x 50 mm with 1000 mm FEP lead	<p>This easy-to-use, flexible, fast response, foil between pack probe has been designed to measure between packs or boxes of produce in a variety of applications.</p> <ul style="list-style-type: none"> <li>● Response time less than 3 seconds</li> <li>● Probe temperature range -20 to 75 °C</li> </ul>	170-090	29.00
<b>CORKSCREW PROBE</b>   Ø8 x 100 mm	<p>This frozen food probe incorporates a heavy-duty T-shaped, polypropylene handle and a corkscrew design sensing tip. Ideal for measuring deep frozen foods or other frozen materials. Supplied with a one metre PVC detachable lead.</p> <ul style="list-style-type: none"> <li>● Response time less than 9 seconds</li> <li>● Probe temperature range -40 to 150 °C</li> </ul>	170-175	125.00
<b>CALIBRATION TEST CAPS</b>  	<p>These thermistor test caps are suitable for checking the accuracy of the Therma 20 or any equivalent thermistor thermometer. Simply plug in the desired test cap and the display on the thermometer should show the same temperature as the certified value.</p> <p>Each test cap is supplied with a UKAS Certificate of Calibration with a guaranteed uncertainty of <math>\pm 0.1^\circ\text{C}</math>.</p>	286-001 (-18 °C) 286-002 (0 °C) 286-003 (3 °C) 286-004 (70 °C) 286-005 (100 °C)	40.00 40.00 40.00 40.00 40.00

Please note: the above NTC thermistor probes are suitable for use with the Therma 20 and Therma 22 thermometers

# SOUS VIDE THERMOMETER KITS

## SOUS VIDE PREMIUM THERMOMETER KIT

Each kit contains:

- Therma 1 thermometer (221-041)
- 60 mm Sous Vide needle probe (133-109)
- 120 mm Sous Vide needle probe (133-110)
- Water-resistant countdown timer (806-150)
- Box of 100 Probe Wipes (836-220)
- Sous Vide foam/tape - one metre (600-470)
- ABS carrying case (834-150)

Order code	Description	£ each
860-035	Sous Vide Premium thermometer kit	159.75
600-470	Additional Sous Vide foam/tape	12.50
FREE traceable certificate of calibration included		



## SOUS VIDE STANDARD THERMOMETER KIT

Each kit contains:

- Therma 1 thermometer (221-041)
- 60 mm Sous Vide needle probe (133-109)
- Sous Vide foam/tape - one metre (600-470)
- Zip pouch (830-037)

Order code	Description	£ each
860-036	Sous Vide Standard thermometer kit	111.00
600-470	Additional Sous Vide foam/tape	12.50
FREE traceable certificate of calibration included		

## SOUS VIDE THERMAPEN® THERMOMETER

- Miniature needle probe for Sous Vide cooking
- High accuracy  $\pm 0.4^\circ\text{C}$

The Sous Vide Thermapen thermometer has been specifically designed for sous vide cooking and areas where precise temperature measurement is required.

This model incorporates a miniature, stainless steel needle probe that has a  $\varnothing 1.1 \times 60\text{ mm}$  reduced tip, that conveniently folds back through  $180^\circ$  into the side of the instrument when not in use.

Use in conjunction with sous vide tape to measure the core temperature without suffering water ingress into your vacuum sealed bag.



Please Note: The probe tip is small in diameter and should be used with care.



### OPTIONAL ACCESSORIES:

- Sous Vide foam/tape - one metre (600-470)
- Zip pouch with belt strap (830-001)

# DISHTEMP® THERMOMETER

- Simulates maximum plate surface temperatures
- Waterproof to IP66
- HACCP compatible
- FREE traceable certificate of calibration

The DishTemp thermometer simulates a plate as it's cleaned and sanitised in a commercial dishwasher, accurately recording the maximum surface temperature at the touch of a single button, eliminating the need for costly and inaccurate test strips and stem thermometers that do not stay in place or record the surface temperature of a plate.

The instrument indicates temperature over the range of 0 to 90 °C with a resolution of 0.1 °C/°F and an accuracy of  $\pm 0.5$  °C. Incorporating a durable water-tight seal, the DishTemp thermometer is waterproof to IP66 and is supplied complete with a FREE one point (71 °C) traceable certificate of calibration.



## Bluetooth®

model available -  
see our website for details.

- **Stainless steel wall bracket (832-280)**

This handy, stainless steel, wall-mounted thermometer holder lets you store your DishTemp thermometer safely - wherever you need it.



IP66



Specification	DishTemp
Range	0 to 90 °C
Resolution	0.1 °C/°F
Accuracy	$\pm 0.5$ °C
Battery	3 volt CR2032 lithium coin cell
Battery life	5,000 hours
Display	Custom LCD
Dimensions	14 x Ø127 mm
Weight	120 grams
FREE traceable certificate of calibration included	

Order code	Description	£ each
810-280	DishTemp thermometer	38.00
832-280	Stainless steel wall bracket	13.00

# PIZZA IR THERMOMETER

- Circular laser for precise targeting
- Backlit display

The Pizza IR thermometer is a compact, lightweight, and easy-to-use infrared thermometer that provides fast and accurate temperature readings. It is the ideal tool to determine when your pizza oven's floor is ready to cook the perfect pizza.

The device features a 13-dot circular laser that offers precise targeting, with a fixed emissivity of 0.95. To display the surface temperature, simply aim and pull the trigger.

The thermometer is housed in a soft-touch case with a white backlit display and an auto-power off feature that turns the unit off after 10 seconds.

- 13-dot circular laser that offers precise targeting



Order code	Description	£ each
814-090	Pizza IR thermometer	35.00



Specification	Pizza IR thermometer
Range	-50 to 550 °C
Resolution	0.1 °C
Accuracy	±2 % or 2 °C (0 to 550 °C) otherwise ±4 °C
Distance to target	12:1
Emissivity	0.95 fixed
Battery	9V PP3
Battery life	38 hours
Dimensions	42 x 100 x 155 mm
Weight	186 grams

## IR-POCKET THERMOMETER

- LED spot alignment - safer than a laser
- Max/min, display hold & lock functions

The IR-Pocket non-contact, infrared thermometer has an easy to read, LCD display with low battery indication and an auto-power off facility that turns the instrument off after 15 seconds.

This thermometer features a two-button keypad, simply aim the thermometer at the target and press the 'measure' button to display the surface temperature instantly. Pressing the 'mode' button allows the user to access a variety of functions, i.e. max/min, °C/°F, lock and emissivity. The lock function allows for continuous temperature measurement and the emissivity is adjustable so the user can measure a variety of surface types.

The unit incorporates LED spot alignment, which allows the user to precisely target the diameter of the area being measured.

Order code	Description	£ each
814-060	IR-Pocket	26.00



Specification	IR-Pocket
Range	-9.9 to 199.9 °C
Resolution	0.1 °C/°F
Accuracy	±2 °C or ±2 % whichever is greater
Field of view	Target ratio 1:1
Emissivity	0.95 default - adjustable 0.1 to 1
Battery & life	2 x 1.5 volt AAA - 20 hours continuous use
Display	Custom LCD
Dimensions	25 x 52 x 100 mm
Weight	88 grams

# MINI RAYTEMP® INFRARED THERMOMETER

- Target distance/diameter ratio 12:1
- Laser dot alignment

The Mini RayTemp infrared thermometer is compact, lightweight and ideal for numerous temperature measurement applications where contact with the item to be measured is an issue. Simply aim and pull the trigger to display the surface temperature of the item.

This infrared thermometer has a clear, easy-to-read, LCD display with low battery, backlight indication and an auto-power-off facility that turns the instrument off after ten seconds, maximising battery life.

The unit also incorporates laser assisted alignment as standard, to assist in pin-pointing the area of measurement, and incorporates a 12:1 optic ratio (target distance/diameter ratio) and a fixed emissivity of 0.95 making it suitable for a wide range of catering and food processing applications.

Order code	Description	£ each
814-080	Mini RayTemp	35.00
830-040	Protective nylon pouch	7.00



Specification	Mini RayTemp
Range	-50 to 330 °C
Resolution	0.1 °C/°F
Accuracy	±2 °C (0 to 330 °C) otherwise ±4 °C or ±4 % whichever is greater
Field of view	Target ratio 12:1
Emissivity	0.95 fixed
Battery & life	9 volt PP3 - 80 hours continuous use
Display	Custom LCD
Dimensions	36 x 88 x 131 mm
Weight	143 grams

# RAYTEMP® 3 INFRARED FOOD THERMOMETER

- High accuracy over the critical food range
- Circular laser for precise targeting

The RayTemp 3 infrared food thermometer is compact, lightweight, easy-to-use and ideal for measuring food surface temperatures, eliminating the need to touch or contaminate the food you are measuring, avoiding the risk of cross-contamination. Additionally the unit is suitable for measuring the surface temperature of griddles and hotplates.

Simply aim and pull the trigger to display the temperature of the item being measured. In addition the LCD will display the maximum temperature. The RayTemp 3 incorporates a circular laser with centre dot indicator, which allows you to precisely target the diameter of the area to be measured, backlight indication and an auto-power-off facility that turns the unit off after 15 seconds, maximising battery life.

Order code	Description	£ each
814-040	RayTemp 3	70.00
830-040	Protective nylon pouch	7.00
834-740	ABS carrying case	34.00
814-132	Comparator	46.00



Specification	RayTemp 3
Range	-60 to 500 °C
Resolution	0.1 °C/°F (-9.9 to 199.9 °C) or 1 °C
Accuracy	±1 °C (0 to 65 °C) otherwise ±2 °C or ±2 % whichever is greater
Field of view	Target ratio 12:1
Emissivity	0.97 fixed
Battery & life	2 x 1.5 volt AAA - 140 hours continuous use
Display	Custom LCD
Dimensions	40 x 66 x 155 mm
Weight	180 grams

# THERMADATA® THERMOCOUPLE LOGGER

- Waterproof housing offering IP67 protection
- Temperature range -100 to 1372 °C
- Two channel type K thermocouple input
- Capture multiple logging processes in a single download

The ThermaData Thermocouple Logger is part of a comprehensive range of portable data loggers utilising the latest in electronic technology and housed in a waterproof, ergonomic case designed to meet IP67 protection, with built-in magnets.

This unit features dual type K thermocouple inputs and measures temperatures ranging from -100 to 1372 °C. It provides a resolution of 0.1 °C, automatically switching to 1 °C for readings between 300 and 1372 °C. At programmable intervals, it can record and store up to 120,000 (2 x 60,000) temperature readings.

Each logger incorporates a red and green LED. The flashing green LED indicates that the logger is active/logging, and the flashing red LED indicates that your customised preset alarms have been exceeded. A multi-logging feature also allows this instrument to be started and stopped, in order to map multiple processes, without having to download the data each time.

Featuring an easy-to-read LCD, the unit displays temperature, high and low limits, max/min recorded temperatures and comes with FREE downloadable software and traceable certificate of calibration.

We offer an extensive range of interchangeable type K thermocouple probes for a variety of different applications, visit our website for our complete range.

## Food simulant probe (133-350)

For accurate cold food monitoring. The lead is available in three lengths.



**USB-C® lead**  
Included with the product.

Order code	Description	£ each
291-121	Model TD2TC (Type K)	100.00
133-350	Food simulant temperature probe (1 m)	35.00
133-352	Food simulant temperature probe (3 m)	40.00
133-354	Food simulant temperature probe (5 m)	45.00

ThermaData Thermocouple loggers are exclusive of probes



## ThermaData® Hub: Simple, smart, subscription-free HACCP software

- ✓ All-in-one dashboard
- ✓ No subscription fees
- ✓ Complete HACCP compliance, digitally
- ✓ Actionable insights
- ✓ Customisable reports

For more information, see our website.



Specification	TD2TC
Range	-100 to 1372 °C
Operating range	-20 to 85 °C
Resolution	0.1 °C (up to 300 °C) thereafter 1 °C
Accuracy	±0.4 °C or ±0.1% of reading
Memory	120,000
Sample rate	1 second to 240 minutes
Battery	1 x 2/3 AA Li-CoCl <sub>2</sub>
Battery life	1 year (1 minute sample rate)
Sensor type	Thermocouple
Display	Dual 12 mm LCD
Dimensions	67 x 84 x 30.5 mm
Weight	269.7 grams
FREE traceable certificate of calibration included	

# THERMADATA® THERMISTOR LOGGERS

- Capture multiple logging processes in a single download
- Built-in magnets
- Large memory of up to 120,000 readings
- Waterproof to IP67

The ThermaData Thermistor Logger is part of a comprehensive range of portable data loggers utilising the latest in electronic technology and housed in a waterproof ergonomic case designed to meet IP67 protection.

The unit is available in two models, and offers the choice between internal or external temperature sensors/probes. The fixed temperature probes are supplied with a one metre PVC/PFA lead.


Each logger incorporates a red and green LED. The flashing green LED indicates that the logger is active/logging, and the flashing red LED indicates that your customised preset alarms have been exceeded.

The ThermaData Thermistor Logger measures temperature over the range of -40 to 125 °C (model dependent) with a 0.1 °C resolution. At programmable intervals the logger will record the temperature, up to a maximum of 120,000 readings. A multi-logging feature also allows this instrument to be started and stopped, in order to map multiple processes, without having to download the data each time.

Featuring an easy-to-read LCD, the unit displays temperature, high and low limits and max/min recorded temperatures.

## USB-C® lead

Allow easy connection to any PC with a standard USB port socket. Simply connect lead to the data logger, install software on your PC and go. (Included with the product).

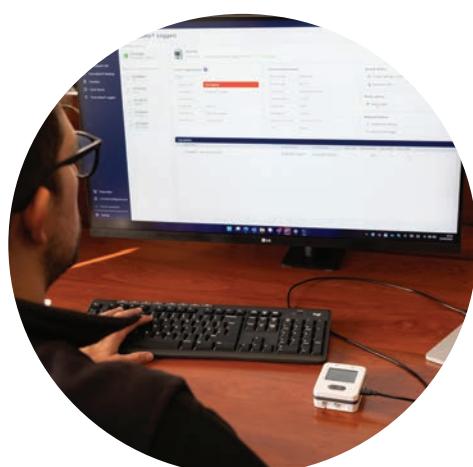

Order code	Description	£ each
291-001	Model TD Thermistor	68.00
291-011	Model TD1F Thermistor	85.00



## ThermaData® Hub: Simple, smart, subscription-free HACCP software

- ✓ All-in-one dashboard
- ✓ No subscription fees
- ✓ Complete HACCP compliance, digitally
- ✓ Actionable insights
- ✓ Customisable reports

For more information, see our website.



CATERING

Specification	TD/TD1F
Range - internal	-20 to 85 °C
Range - external	-40 to 125 °C (TD1F only)
Operating range	-20 to 85 °C
Resolution	0.1 °C
Accuracy	±0.5 °C (instrument only) ±0.1 °C (system)
Memory	120,000
Sample rate	1 second to 240 minutes
Battery	1 x 2/3 AA Li-CoCl2
Battery life	1 year (default settings)
Sensor type	Thermistor
Display	12 mm LCD
Dimensions	67 x 84 x 30.5 mm
Weight	132.9 grams (TD) / 147.8 grams (TD1F)
FREE traceable certificate of calibration included	

# THERMADATA® WIFI LOGGERS FOR TEMPERATURE

- Receive notifications when alarm limits are exceeded
- Access recorded data worldwide via TD Link app
- FREE software with NO ongoing or subscription charges
- Programmable high/low alarms

The new ThermaData WiFi Loggers now feature improved connectivity and convenience. With enhanced WiFi reliability, they stay connected at all times, ensuring uninterrupted data logging. An enhanced Bluetooth pairing setup also simplifies the initial setup, making it quicker and more user-friendly. These battery-powered loggers offer a cost-effective temperature monitoring system that remotely records the temperature of appliances and buildings. Each logger transmits the recorded data to a Wi-Fi router connected to the internet. This data can then be accessed and viewed from anywhere in the world using a PC, laptop, or tablet.

The loggers have a range limited to the specification of the users Wi-Fi router. Each logger has an intuitive LCD displaying; temperature, Wi-Fi and internet connection status, max/min recorded temperatures, alarm status and battery life.


At programmable intervals, the loggers will record temperature from both sensors, recording up to a maximum of 36,000 readings (18,000 from each sensor). The temperature value on the LCD display on each logger will flash to indicate that the customised preset alarms have been exceeded. Each logger communicates directly to the Wi-Fi router at set intervals to push data through the internet into ThermaData Hub. The information is available to be analysed and exported into a report format. Each unit is supplied with a USB lead and FREE wall bracket. ThermaData Hub software is available to download FREE from our website and is licence free, with no ongoing or subscription charges.



## HOW DOES THE THERMADATA WIFI LOGGER WORK?

Using the unique ID of each logger, ThermaData Hub creates a secure connection between logger and software, which can be accessed and viewed anytime and anywhere with an internet connection. Each logger communicates directly to the Wi-Fi router at set intervals to push data through the internet into ThermaData Hub.

Simple setup & easy-to-use software makes the ThermaData WiFi loggers perfect for HACCP analysis

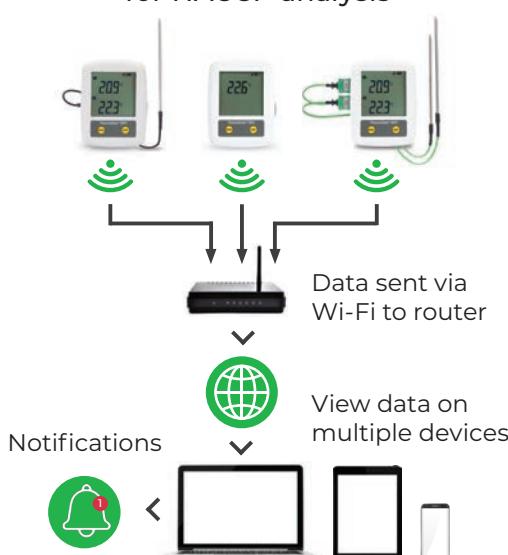

## ThermaData® Hub: Simple, smart, subscription-free HACCP software

- ✓ All-in-one dashboard
- ✓ No subscription fees
- ✓ Complete HACCP compliance, digitally
- ✓ Real-time alerts & notifications
- ✓ Actionable insights
- ✓ Customisable reports

For more information, see our website.

Please note: Wi-Fi routers have a range of 100 metres depending on the make, model, capabilities and setup of the router. Environmental conditions may also affect the signal strength.

## THERMADATA® WIFI ONE/TWO CHANNEL THERMISTOR LOGGERS

The ThermaData WiFi thermistor loggers can be supplied with one internal sensor or a stainless steel general purpose probe (Ø3.3 x 100 mm) with a one metre PUR/PVC fixed lead. **Please Note:** Model TD1F is supplied with one external remote probe and an internal sensor.

Specification	TD	TD1F
Range - internal	0 to 50 °C	0 to 50 °C
Range - external	N/A	-40 to 125 °C
Resolution	0.1 °C/F	
Accuracy	±0.5 °C	
Memory	36,000 readings	2 x 18,000 readings
Sample rate	6 seconds to 330 minutes	
Battery & life	2 x 1.5 volt AA - approximately 1 year	
Display	13.4 mm LCD	
Dimensions	29 x 72.5 x 96 mm	
Weight	165 grams model dependant	
<b>FREE traceable certificate of calibration included</b>		

**NEW  
MODEL**



MAX/  
MIN



2  
YEAR  
GUARANTEE  
MADE IN  
BRITAIN

Order code	Description	£ each
297-001	Model TD	140.00
297-011	Model TD1F*	150.00
832-590 ABS wall bracket also included (see website)		
*Inclusive of thermistor probe(s)		

### ThermaData® Hub software

For more information, see our website.

## THERMADATA® WIFI TWO CHANNEL THERMOCOUPLE LOGGERS

The ThermaData WiFi thermocouple loggers are available in two sensor types, type K and type T Thermocouple. **Please Note:** Each logger is supplied exclusive of probes, see below for a small selection of probes available or for our complete range contact our sales office or visit our website.

Specification	ThermaData WiFi - Thermocouple
Range - type K	-99.9 to 1372 °C
Range - type T	-99.9 to 400 °C
Resolution	0.1 °C/F to 999.9 thereafter 1 °C/F
Accuracy	±0.4 °C ±0.1% of reading
Memory	2 x 18,000 readings
Sample rate	6 seconds to 330 minutes
Battery & life	2 x 1.5 volt AA - approximately 1 year
Display	13.4 mm LCD
Dimensions	29 x 72.5 x 96 mm
Weight	165 grams
<b>FREE traceable certificate of calibration included</b>	

**NEW  
MODEL**



General purpose  
probes (133-158)



MAX/  
MIN



2  
YEAR  
GUARANTEE  
MADE IN  
BRITAIN

Order code	Description	£ each
297-121	Model TD2TC - type K	165.00
297-721	Model TD2TC - type T	165.00
830-800	Magnetic mount	9.00
830-880	Protective cover - black	14.00
<b>Exclusive of thermocouple probes</b>		

			Order code	£ each
<b>GENERAL PURPOSE PROBE</b>		This stainless steel probe is suitable for a wide range of applications. Supplied with a one metre PFA insulated lead and connector.	133-158 (1000 mm)	24.00
		Ø3.3 x 100 mm	133-220 (3000 mm)	28.00
			133-222 (5000 mm)	32.00
<b>FOOD SIMULANT PROBE</b>		This polypropylene simulant probe is designed for use in refrigeration, food storage and chill cabinets. Supplied with a one metre PFA insulated lead and connector.	133-350 (1000 mm)	35.00
		9 x 100 x 100 mm	133-352 (3000 mm)	40.00
			133-354 (5000 mm)	45.00
<b>HEAVY-DUTY PFA WIRE PROBE</b>		This heavy-duty, PFA insulated wire probe is ideal for measuring the air temperature in fridges, freezers, ovens etc.	133-372 (1000 mm)	15.00
		Ø2.4 x 1000 or 2000 mm	133-373 (2000 mm)	17.50
				

Please note: for type T thermocouple probes, replace the third digit (3) of the order code with the number 7

# RFX® MEAT WIRELESS THERMOMETER

- Track core meat temperatures from your device
- Use up to 50 probes with one GATEWAY
- Reliable wireless connection
- Up to 50 hours of battery life with a 10-minute charge

The new RFX® MEAT is a premium wireless meat probe built for reliability. Its powerful radio frequency technology cuts through walls, ovens, and BBQs, giving you consistent, worry-free temperature monitoring from anywhere.

RFX MEAT withstands ambient temperatures up to 538 °C with an ultra-fine 5.4 mm probe, ideal for delicate foods. It is fully (IP69K) waterproof and dishwasher safe and charges in 10 minutes for up to 50 hours of use.

## Commercial-grade Meat Probe

RFX ensures safe and delicious results whilst streamlining your kitchen workflow. Keep track of multiple meats at a glance without opening your oven or BBQ. Insert the wireless RFX MEAT probe into your food, then monitor it remotely using the free ETI app. Get alerted to ensure perfect results, and save your cooking history for easy food safety audits.

Four internal sensors ensure precise core readings. RFX MEAT comes with a free traceable certificate of calibration, available to download.



**NEW**

Must be paired with  
RFX GATEWAY (825-180).  
Sold separately - see  
opposite page.



## HOW RFX MEAT WORKS



- ✓ Set high/low alerts
- ✓ View live and historical temperature graphs
- ✓ Monitor up to 50 RFX MEAT probes at once
- ✓ Cloud subscriptions available

- Charging block and coloured probe rings included with RFX MEAT.



Order code	Description	£ each
825-170	RFX MEAT	79.99

Must be paired with RFX GATEWAY (see opposite)

Specification	RFX MEAT
Range - internal	-18 to 100 °C
Range - external	-18 to 538 °C
Accuracy	±0.5 °C (-10 to 100 °C)
Battery life	Up to 52 hours from a 10-minute charge (80%). Over 65 hours from a 20-minute charge (100%)
Charging block - probe charging	175+ full charges per AAA battery
Charging block - Charging speed	0-80% in 10 minutes; 0-100% in 20 minutes
Charging block - battery	1.5 V AAA
Wireless communication	433MHz radio frequency
Transmission distance	Battery powered RFX GATEWAY: 650 m (2,132 ft.), AC Powered RFX GATEWAY: 385 m (1,263 ft.) (RFX MEAT to RFX GATEWAY)
Sensor type	Thermistor, 4 Sensors
Dimensions - probe	Ø5.4 x 122 mm (reduces to Ø2.8 mm)
Dimensions - charging block	20.5 x 23 x 143 mm
Weight	7 grams (probe only) 60 grams (with charging unit)

FREE traceable certificate of calibration, available to download

# RFX® GATEWAY WIRELESS RECEIVER

- Seamless radio frequency technology
- Blasts readings through ovens and grills
- Connect to WiFi to monitor from anywhere
- Free ETI app for tracking your cooks

The new RFX GATEWAY enables seamless wireless meat monitoring with a completely uninterrupted connection. Pair RFX MEAT with the RFX GATEWAY to transmit accurate temperature readings to your device via WiFi or *Bluetooth*®, Monitor your cook remotely in the free ETI app, receive real-time alerts, and automatically save your cooking history for easy food safety audits.

Advanced radio frequency technology ensures a strong, stable connection through thick ovens, barbecues, and walls. With a 457-metre line-of-sight range and monitoring for up to 50 probes per GATEWAY, setup is effortless. Pair once and you're always connected.

GATEWAY connects to the ETI app, letting you track cooks live and receive notifications wherever you are. Create a FREE ETI Cloud account to access your data from any browser, giving you total flexibility and control. RFX GATEWAY is fully compatible with the Billows BBQ control fan, maintaining your target pit temperature automatically. No more flare-ups, burn-outs, vent adjustments, and constant coal management.

Each unit includes a Pro-Series air probe for precise pit readings, a grate clip, power adaptor, USB-C® cable and probe rings.

- ✓ GATEWAY connects to the ETI app
- ✓ Track cooks in real-time and receive alerts
- ✓ Create a FREE ETI cloud account to access data
- ✓ Compatible with Billows



Order code	Description	£ each
825-180	RFX GATEWAY	79.99
860-170	RFX Starter Kit - 1 probe	160.00
860-172	RFX Starter Kit - 2 Probes	240.00
860-174	RFX Starter Kit - 4 Probes	400.00
860-1710	RFX Starter Kit - 10 Probes	879.89
860-1750	RFX Starter Kit - 50 Probes	4079.49
<b>Must be paired with RFX MEAT</b>		

NEW



Must be paired with RFX MEAT (825-170). Sold separately - see opposite page.

Scan below for ETI app and cloud info



## 860-170 RFX Starter Kit (1 Probe)

Wireless cooking thermometer system. Includes RFX GATEWAY, RFX MEAT, charging block, power adaptor, USB-C® cable, Pro-Series air probe, gate clip and probe rings. Available kits with 1, 2, 4, 10 & 50 probes.



Specification	RFX GATEWAY
Range	-50 to 300 °C
Accuracy	±0.5 °C (-10 to 100 °C) ±1.5 °C (-50 to -20 °C) 100 to 200 °C ±2.5 °C from 200 to 300 °C
Battery life	24 hours
Transmission distance	Battery powered RFX GATEWAY: 650 m (2,132 ft.), AC Powered RFX GATEWAY: 385 m (1,263 ft.) (RFX MEAT to RFX GATEWAY)
Bluetooth	4.2 (set up)
Dimensions	27.25 x 55.85 x 88.5 mm
Wireless	802.11 b/g/n (2.4 GHz)
Weight	117 grams

Please note: Bluetooth LE thermometers have a range of 50 metres depending on the users smart device make and model. Environmental conditions may also affect the signal strength.

## THERMADATA® LITE LOGGER

- LED shows if limits are exceeded
- FREE software to download

The ThermaData Lite logger is a cost effective, self-contained temperature data logger or blind recording thermometer that is designed to record the temperature of the surrounding environment. The logger is housed in a water-resistant polyethylene case and incorporates two LED status indicators.

The ThermaData Hub software allows the user to programme the logging sample/interval rate (6 seconds to 255 minutes), the real-time clock, °C/°F, delayed start (maximum 23 hours, 59 minutes), push-button start, temperature start or time start and a 31-character user ID.

The software also incorporates a password protected calibration adjustment feature that allows the user to check the calibration of loggers and make minor adjustments of 0.1 °C (±3 °C). For more information contact our sales office or visit our website.

Order code	Description	£ each
293-010	ThermaData Lite - white	50.00
293-020	ThermaData Lite - yellow	50.00
293-050	ThermaData Lite - blue	50.00
293-070	ThermaData Lite - black	50.00
812-510	USB-C® lead	4.00



Specification	ThermaData Lite
Range	-40 to 85 °C
Resolution	0.1 °C
Accuracy	±0.5 °C
Memory	16,000
Sample rate	6 seconds to 255 minutes
Battery	3.6 volt ½ AA lithium
Battery life	Minimum 3 years
Dimensions	Ø55 x 25 mm
Weight	40 grams


Optional UKAS Certificate of Calibration available

## THERMADATA® STAINLESS STEEL PRO LOGGERS

- Integral USB interface for setup & download
- 6 probe options available

These ThermaData Stainless Steel Pro loggers are ideal for food, pharmaceutical and other applications where a high temperature data logger is required. The Stainless Steel Pro is housed in a waterproof, food grade 316 stainless steel case to protect the logger from corrosion, impact and moisture (IP67).

The ThermaData Hub software allows the user to programme the logging sample/interval rate (1 second to 255 minutes), the real-time clock, °C/°F, delayed start (maximum 23 hours, 59 minutes), software start, temperature start or time start, a 31-character user ID, and high/low alarm limits.

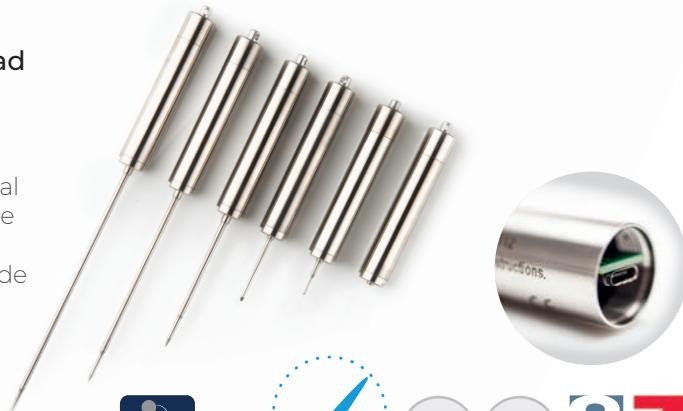

Specification	ThermaData Stainless Steel Pro
Range	-20 to 125 °C
Resolution	0.1 °C
Accuracy	±0.5 °C
Memory	16,000 temperature readings
Sample rate	1 second to 255 minutes
Battery	3.6 volt 2/3 AA lithium
Battery life	3 years (based on 6 sec sample rate)
Dimensions	Ø22.5 x 129 mm (excluding probe)
Weight	170 grams - model dependant

Optional UKAS Certificate of Calibration available

# THERMAPOD USB LOGGER

- No software required to download data
- Records up to 7,500 readings
- Splashproof to IP65
- Temperature range -25 to 85 °C

The ThermaPod USB logger is the ideal choice for logistics and transportation. With no software required, the logger will generate its own PDF report when plugged into a computer, allowing the user to easily accept or reject a delivery.

The ThermaPod measures temperatures over the range of -25 to 85 °C with a 0.1 °C resolution and is splashproof to IP65. Using the two buttons on either side of the LCD screen, the user can program set intervals between six and 255 minutes. The logger can store up to 7,500 readings.


Each unit is powered by a 3-volt CR2032 battery that gives up to 10,000 hours of continuous use. When idle, the display will automatically power off after 30 seconds, maximising battery life.

The unit incorporates an LED that will flash green when the data function is on and red when it is connected to a computer.



- **Download data instantly**

Simply plug the ThermaPod USB Logger into a computer to generate a PDF report

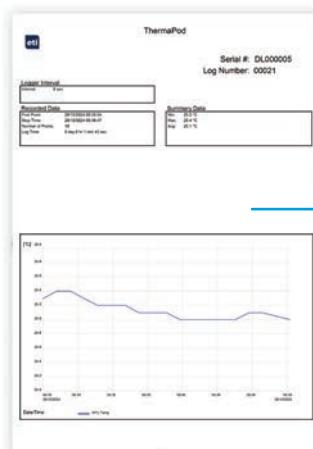

Example of PDF file



Specification	ThermaPod USB Logger
Range	-25 to 85 °C
Resolution	0.1 °C
Accuracy	±0.5 °C (-10 to 70 °C) otherwise ±1 °C
Memory	7,500 readings
Sample rate	6 to 255 minutes
Battery	3 volt CR2032 lithium coin cell
Battery life	10,000 hours
Display	Custom LCD
Dimensions	14.5 x 26 x 76 mm
Weight	26 grams

Order code	Description	£ each
825-290	ThermaPod USB Logger	35.00

# MULTI-FUNCTION THERMOMETER

- Includes CalCheck 0.0 °C function
- Displays both temperature & alarm set temperatures

The Multi-Function is a compact and easy-to-use thermometer ideal for restaurants, bars and cafes as an economical solution for temperature measurement applications.

The thermometer features a display hold facility, max/min memory and a CalCheck 0.0 °C function together with an adjustable audible high/low temperature alarm.

The Multi-Function thermometer housing and probe handle includes Biomaster product protection that reduces bacterial growth.

Each unit is supplied with a stainless steel, food penetration probe (Ø3.5 x 125 mm) with one metre PVC connecting lead, pocket clip and probe cover.



Order code	Description	£ each
810-927	Multi-Function thermometer	12.00

Specification	Multi-Function
Range	-19.9 to 149.9 °C
Resolution	0.1 °C/°F
Accuracy	±1 °C (0 to 120 °C) otherwise ±2 °C
Battery & life	1.5 volt AAA - 5,000 hours
Sensor type	Thermistor
Display	Custom LCD
Dimensions	25 x 75 x 125 mm
Weight	111 grams

# ECOTEMP® THERMOMETER

- Detachable, stainless steel penetration probe
- Large, easy-to-read LCD display

The EcoTemp digital thermometer features a large, easy-to-read, LCD display with display hold and max/min memory functions. The instrument measures temperature over the range of -49.9 to 199.9 °C with a 0.1 °C/°F resolution. Both open circuit and low battery indication are displayed when applicable. This thermometer is ideal for monitoring cooking and food holding temperatures as part of HACCP and health and safety procedures.

The EcoTemp thermometer housing and probe handle includes Biomaster product protection that reduces bacterial growth. Each unit is supplied with a detachable, stainless steel food penetration probe (Ø3.5 x 125 mm) with a 700 mm silicone connecting lead.

Order code	Description	£ each
810-950	EcoTemp thermometer & probe	29.50
810-951	Replacement penetration probe	11.00
810-952	Air wire probe (3m)	8.50
810-954	Air wire probe (1.5m)	8.50
810-955	Oven penetration probe	8.50
830-215	Protective silicone cover - white	9.00



Specification	EcoTemp
Range	-49.9 to 199.9 °C
Resolution	0.1 °C/°F
Accuracy	±1 °C (-49.9 to 149.9 °C)
Battery & life	2 x 1.5 volt AAA - 10,000 hours
Sensor type	Thermistor
Display	Custom 22 mm LCD
Dimensions	20 x 58 x 165 mm
Weight	115 grams

# MICRO POCKET THERMOMETER

- Compact design, ideal for chefs' pockets
- Reduced tip for faster response

The water-resistant Micro Pocket thermometer is the ideal choice for chefs who need a compact and convenient thermometer for spot checks in the kitchen.

Measuring temperature over the range of -50 to 150 °C with a 0.1 °C resolution, the thermometer will power off automatically after 5 minutes, maximising battery life.

The instrument incorporates a Ø2.5 x 100 mm stainless steel penetration probe with a reduced fast response Ø1.6 mm tip.

Available in white, red and blue, each unit is supplied with a protective probe cover that incorporates a pocket clip for safe storage and transportation.



Order code	Description	£ each
810-841	Micro Pocket thermometer - white	21.00
810-844	Micro Pocket thermometer - red	21.00
810-845	Micro Pocket thermometer - blue	21.00



## Specification Micro Pocket

Range	-50 to 150 °C
Resolution	0.1 °C
Accuracy	±0.5 °C (-10 to 100 °C) otherwise 1.0 °C
Battery	1 x 3 volt CR1632 lithium coin cell
Battery life	2,000 hours
Sensor type	Thermistor
Display	13 x 9 mm
Dimensions	22 x 27 x 124 mm
Weight	15 grams

## ThermaStick® thermometer

The ThermaStick is a handy, pocket-sized, waterproof to IP66 thermometer that incorporates a Ø2.5 x 115 mm stainless steel penetration probe with a reduced fast response Ø1.6 mm tip.

The unit measures temperature over the range of -49.9 to 299.9 °C with a resolution of 0.1 °C/°F and accuracy of ±0.5 °C (-10 to 100 °C) otherwise ±2.5 °C and features two easy-to-use push buttons, on/off and max/min.



Specification	ThermaStick
Range	-49.9 to 299.9 °C
Resolution	0.1 °C/°F
Accuracy	±0.5 °C (-10 to 100 °C) otherwise ±2.5 °C
Battery & life	3 volt CR2032 lithium coin cell - 5,000 hours
Sensor type	Thermistor
Display	12 mm LCD
Dimensions	Ø46 x 15 x 188 mm
Weight	28 grams

Order code	Description	£ each
810-401	ThermaStick thermometer - white	19.50
810-404	ThermaStick thermometer - red	19.50
810-405	ThermaStick thermometer - blue	19.50

## ThermaProbe® thermometer

The ThermaProbe is a lightweight, waterproof to IP66 thermometer with a bi-directional auto-rotating display. It comes with a Ø2.5 x 70 mm stainless steel penetration probe with a reduced fast response Ø1.6 mm tip, and includes max/min and on/off buttons.

Each unit is supplied with two batteries and a protective probe cover.



## Specification ThermaProbe

Range	-50 to 300 °C
Resolution	0.1 °C/°F
Accuracy	±0.5 °C (-10 to 100 °C) otherwise ±2.5 °C
Battery & life	2 x 1.5 volt LR44 - 4,000 hours
Sensor type	Thermistor
Display	Custom LCD
Dimensions	Ø51 x 178 mm
Weight	41 grams

Order code	Description	£ each
810-421	ThermaProbe thermometer	21.50

# POCKET-SIZED THERMOMETERS

## Pen-shaped thermometer



This pen-shaped thermometer measures temperature over the range of -49.9 to 149.9 °C, features a Ø3.5 x 120 mm stainless steel penetration probe and incorporates a °C/°F switch and display hold feature. Supplied with a probe cover that includes a pocket clip.

### Specification Pen-shaped

Range	-49.9 to 149.9 °C
Resolution	0.1 °C/°F
Accuracy	± 1 °C (-19.9 to 119.9 °C) otherwise ±2 °C
Battery & life	1.5 volt LR44 - 5,000 hours
Sensor type	Thermistor
Display	6 mm LCD
Dimensions	17 x 20 x 190 mm
Weight	15 grams

Order code	Description	£ each
810-260	Pen-shaped thermometer	14.50

## Waterproof thermometer



This waterproof IP66/67 thermometer incorporates a Ø2.5 x 122 mm stainless steel penetration probe and has been designed for reliability and ease of use in routine day-to-day catering and food preparation applications.


This unit measures temperature over the range of -49.9 to 199.9 °C with a 0.1 °C resolution and features a max/min temperature recording function.

### Specification Waterproof

Range	-49.9 to 199.9 °C
Resolution	0.1 °C/°F
Accuracy	±0.5 °C (-9.9 to 99.9 °C) otherwise ±1.5 °C
Battery & life	3 volt CR2032 lithium coin cell - 5,000 hours
Sensor type	Thermistor
Display	8 mm LCD
Dimensions	15 x 26 x 200 mm
Weight	25 grams

Order code	Description	£ each
810-275	Waterproof thermometer	19.50
830-275	Protective silicone cover	5.00

## T-shaped thermometer

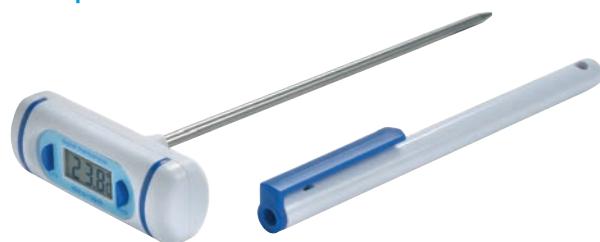

This handy-sized thermometer measures temperature over the range of -49.9 to 149.9 °C, features a Ø3.5 x 120 mm stainless steel penetration probe and incorporates a °C/°F switch and display hold feature. Supplied with a probe cover that includes a pocket clip.

### Specification T-shaped

Range	-49.9 to 149.9 °C
Resolution	0.1 °C/°F
Accuracy	± 1 °C (-19.9 to 119.9 °C) otherwise ±2 °C
Battery & life	1.5 volt LR44 - 5,000 hours
Sensor type	Thermistor
Display	6 mm LCD
Dimensions	20 x 58 x 145 mm
Weight	15 grams

Order code	Description	£ each
810-265	T-shaped thermometer	14.50

## Waterproof T-Shaped thermometers



These waterproof, T-shaped thermometers offer IP66/67 protection and are housed in a robust, polycarbonate case with a strong, stainless steel, penetration probe. The probe measures Ø5 x 125 mm or 300 mm with a reduced tip (Ø3.5 x 20 mm) to improve response time.

These thermometers also feature a max/min memory and display hold function.

### Specification Waterproof T-shaped

Range	-49.9 to 149.9 °C
Resolution	0.1 °C
Accuracy	±1 °C (-19.9 to 119.9 °C)
Battery & life	1.5 volt LR44 - 5,000 hours
Sensor type	Thermistor
Display	12 mm LCD
Dimensions	30 x 88 x 170/345 mm
Weight	50/55 grams

Order code	Description	£ each
810-285	T-shaped - 125 mm probe	20.50
810-287	T-shaped - 300 mm probe	24.50

# TEMPTAG® THERMOMETER

- Portable and versatile max/min thermometer
- Water-resistant to IP65

The TempTag's max/min memory function makes it the ideal thermometer for users looking to record the highest and lowest temperatures.

Measuring temperature over the range of -20 to 60 °C with a resolution of 0.1/1 °C, the TempTag's clear LCD display and °C/°F switchable function make it a versatile thermometer for various applications.

The TempTag is powered by a single CR2032 battery with a life expectancy of 10,000 hours normal use.

This compact unit is available in three colours: white, red or blue. Each unit incorporates a hook into the design for easy wall mounting.

**NEW** Humidity model - see our website for details

Order code	Description	£ each
810-241	TempTag thermometer - white	10.00
810-244	TempTag thermometer - red	10.00
810-245	TempTag thermometer - blue	10.00



Specification	TempTag
Range	-20 to 60 °C
Resolution	0.1/1 °C
Accuracy	±1 °C between 0 to 40 °C, otherwise ±2 °C
Battery	3 volt CR2032 lithium coin cell
Battery life	10,000 hours
Sensor type	Thermistor
Display	Custom LCD
Dimensions	10 x 38 x 54 mm
Weight	25 grams

## FRIDGE OR FREEZER THERMOMETER

- Programmable high/low audible alarm
- Records the max/min temperatures

This fridge or freezer thermometer features a clear LCD display, max/min, audible alarm and incorporates two temperature sensors; a remote water-resistant probe with one metre PVC lead for the appliance temperature and an internal sensor for the room temperature.

The remote probe can be mounted onto the internal wall of the fridge using the suction pad or mounting bracket supplied. The thermometer is housed in a durable ABS case and incorporates a foot stand for shelf mounting.

- Optional UKAS Certificate of Calibration**  
An optional two-point UKAS Certificate of Calibration is available. Each certificate indicates deviations from standards at -18 and 0 °C.

Order code	Description	£ each
810-210	Fridge or freezer thermometer	13.00
891-210	810-210 with UKAS certificate	52.50


**UKAS certificate applies to remote probe only**



Specification	Digital fridge or freezer
Range	-49.9 to 69.9 °C
Resolution	0.1 °C/°F
Accuracy	±1 °C
Battery & life	1.5 volt AAA - 5,000 hours
Display	Custom LCD
Dimensions	15 x 52 x 73 mm
Weight	55 grams

# SPIRIT-FILLED FRIDGE OR FREEZER THERMOMETERS

## Spirit-filled thermometers

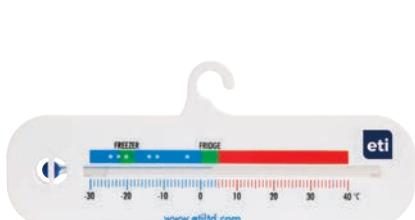

These spirit-filled fridge/freezer thermometers feature clearly marked colour-coded zones for ease of reading.

The horizontal thermometer indicates temperature over the range of -30 to 40 °C in 1°C divisions. The ABS housing measures 53 x 130 mm. The vertical thermometer indicates temperature over the range of -30 to 40 °C in 1°C divisions. The ABS case measures 24 x 150 mm.

Order code	Description	£ each
803-000	Vertical spirit-filled	2.80
803-050	Horizontal spirit-filled	3.50



## Clear spirit-filled thermometer



This spirit-filled fridge/freezer thermometer is encased in a clear ABS housing (20 x 30 x 122 mm). The thermometer's colour-coded zones indicate temperature over the range of -40 to 20 °C and -40 to 80 °F with a 1 °C resolution.

The unit is designed to be hung from a shelf in a fridge, freezer or cold cabinet, alternatively it could be wall-mounted (brackets supplied).

Order code	Description	£ each
803-925	Clear spirit-filled thermometer	3.40
803-930	Clear spirit-filled - box of 10	30.00

## Digital fridge/freezer thermometer



This max/min and alarm fridge/freezer thermometer indicates temperature over the range of -24.9 to 69.9 °C with a resolution of 0.1 °C/°F and an accuracy of  $\pm 1$  °C. The unit features a max/min memory function and a high/low programmable audible alarm.

The unit incorporates two temperature sensors, a remote water-resistant probe with one metre PVC lead for the appliance temperature and an internal sensor for the room temperature. Each thermometer incorporates a foot-stand for shelf mounting and is supplied with a suction pad/ mounting bracket for the remote probe.

Order code	Description	£ each
810-225	Digital fridge or freezer	10.25

## Digital fridge thermometer



This water-resistant (IP65) fridge thermometer incorporates temperature over the range of -9.9 to 49.9 °C with a 0.1 °C resolution.

The unit features a unique food safety zone icon '\*' in the display that will remain on the screen whilst within the range of 0 and 5 °C and will flash to indicate being outside of this range. The energy saving feature turns the unit off when deprived of light, maximising battery life. Powered by a single CR2032 battery with a life expectancy of 10,000 hours normal use.

The unit is housed in an ABS case that measures 26 x 45 x 73 mm and can be free-standing or hung from a shelf.

Order code	Description	£ each
810-251	Digital fridge thermometer	9.50

# FRIDGE OR FREEZER THERMOMETERS

## Ø52 mm dial thermometer




This easy-to-read fridge/freezer thermometer has a Ø52 mm dial that indicates temperature over the range of -30 to 30 °C in 1 °C divisions.

The unit incorporates colour-coded zones for ease of reading. The fridge/freezer thermometer is housed in an ABS case that incorporates a plastic hook to hang from a shelf.

Order code	Description	£ each
800-100	Ø52 mm dial thermometer	2.50
800-101	Ø52 mm dial - box of 20	40.00

## Ø70 mm dial thermometer

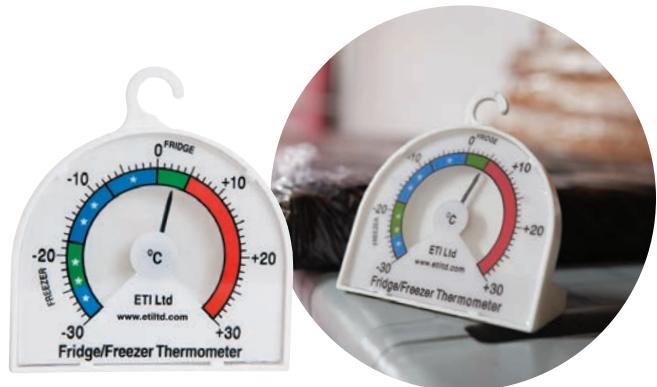

This fridge/freezer thermometer has a Ø70 mm dial that indicates temperature over the range of -30 to 30 °C in 1 °C divisions. The unit incorporates colour-coded zones for ease of reading.

The fridge/freezer thermometer is housed in an ABS case measuring 60 x 70 mm and can be free-standing or hung from a shelf.

Order code	Description	£ each
800-000	Ø70 mm dial thermometer	3.30
800-001	Ø70 mm dial - box of 10	30.00

## Ø50 mm dial thermometer



This stainless steel, fridge/freezer thermometer has a Ø50 mm dial that indicates temperature over the range of -30 to 30 °C in 1 °C divisions.

The colour-coded area indicates when the thermometer is at the correct temperature for a fridge or freezer. The stainless steel housing measures 60 x 70 mm and can be free-standing or hung from a shelf.

Order code	Description	£ each
800-923	Ø50 mm dial thermometer	5.00

## FoodSafe fridge thermometer

The FoodSafe food simulant thermometer is more reliable than traditional thermometers for monitoring fridge temperature. It accurately measures the temperature of food inside, ensuring consistent and safe temperatures for commercial use. It's robust and hygienic.

The unit indicates temperature over the range of -25 to 40 °C with an accuracy of  $\pm 1$  °C over the range of -5 to 20 °C, 2 °C thereafter.

Each FoodSafe measures Ø25 x 150 mm and is supplied with a stainless steel hook for hanging in a fridge or cold cabinet.

Order code	Description	£ each
803-900	FoodSafe thermometer	6.50

# DIGITAL KITCHEN TIMERS

## Countdown/up timer - mins & secs



This countdown/up timer incorporates a louder than average 70 dB audible alarm. The timer is fully programmable, allowing the user to set the time up to 99 minutes and 59 seconds.

The unit is powered by one AAA battery and is designed to sit on a worktop or be attached to an appliance via the magnetic pad at the rear of the instrument.

Order code	Description	£ each
806-101	Countdown/up timer	7.50

## Water-resistant countdown timer



This countdown timer is water-resistant to IP65 and features a large digital display and audible alarm with variable volume control, allowing the user to set up to a maximum volume of 95 dB.

The keypad allows the user to set times up to 99 hours, 99 minutes and 99 seconds. The timer incorporates magnetic pads and a keyhole slot for wall-mounting or attaching to an appliance. The unit measures 22 x 89 x 130 mm and is powered by two AAA batteries.

Order code	Description	£ each
806-150	Water-resistant countdown timer	19.00

## Countdown/up timer - hours, mins & secs



This countdown/up timer features a louder than average 80 dB audible alarm and offers full programmability up to 99 minutes and 59 seconds or 19 hours and 59 minutes.

A single AAA battery provides up to 10 years of use. The unit can sit on any work surface or attach to equipment using the strong magnetic pad on the back.

Order code	Description	£ each
806-105	Countdown/up timer	15.00

## Extra Big & Loud timer



The Extra Big & Loud timer features a rugged housing and is water-resistant to IP65. It includes a variable volume control, allowing the user to set up to a maximum volume of 110 dB - ideal in busy professional kitchens.

When a countdown alarm sounds, the count up timer starts so you will see how much time elapses after your alarm. The memory keeps your last countdown setting. The timer incorporates two magnetic pads and a flip-out stand. The unit measures 28 x 90 x 130 mm and is powered by a 9 volt PP3 battery.

Order code	Description	£ each
806-160	Extra Big & Loud timer	23.00

# MEAT ROASTING & OVEN THERMOMETERS

## Ø55 mm dial oven thermometer

- Indicates temperature over the range of 0 to 300 °C
- Robust stainless steel case

This stainless steel oven thermometer features a clear Ø55 mm dial with colour-coded zones. The green marker indicates the minimum temperature that commercial heated display units should be kept at.

The oven thermometer indicates temperature over the range of 0 to 300 °C in 10 °C divisions. The case measures 43 x 66 x 80 mm.

This oven thermometer can be free-standing or hung from a shelf and should be positioned in the middle of the oven for the most accurate temperature reading.



Order code	Description	£ each
800-809	Ø55 mm dial oven thermometer	5.50

### Specification Dial oven thermometer

Range	0 to 300 °C
Resolution	10 °C
Accuracy	±10 °C
Dimensions	43 x 66 x 80 mm
Weight	49 grams

## Ø45 mm meat dial thermometer



The meat dial thermometer incorporates a Ø45 mm dial with a Ø4 x 105 mm stainless steel pointed probe. The unit indicates temperature over the range of 0 to 120 °C in 1 °C divisions.

For accurate temperature measurement, insert the unit into the thickest part of the meat or poultry. The dial is clearly marked for beef, lamb, pork and poultry.

Order code	Description	£ each
800-804	Ø45 mm meat dial thermometer	4.50

## Ø60 mm meat dial thermometer



This meat dial thermometer features a large Ø60 mm dial with a Ø5 x 102 mm stainless steel pointed probe. The unit indicates temperature over the range of 20 to 100 °C in 2 °C divisions.

For accurate temperature measurement, insert the probe into the thickest part of the meat or poultry. The dial incorporates colour-coded markers for beef, lamb, pork and poultry for fast, easy reading.

Order code	Description	£ each
800-884	Ø60 mm meat dial thermometer	6.50

# DOT - DIGITAL OVEN THERMOMETER

- Programmable high alarm
- Large backlit LCD display

The DOT is an easy-to-use cooking thermometer that displays both the current temperature and alarm set temperature. Simply set the desired temperature using the buttons, insert the probe into your food, the DOT will beep, and the display will flash when the temperature is reached.

The DOT features a large LCD display and loud 70dB audible alarm, ideal for use in busy, commercial kitchens.

The unit is durable and water-resistant and is designed to either sit on a worktop using the fold out stand, or attach to an appliance using the magnetic pads.

Each unit is supplied with a 114 mm penetration probe (810-078) with a 1.2 metre stainless steel braided lead. See below for full probe specification and alternative probes.

Order code	Description	£ each
810-031	DOT - digital oven thermometer - white	32.50
810-030	DOT - digital oven thermometer - charcoal grey	32.50



● Bluetooth®

model available - see our website for details.

- Accessories - see below



## Specification Digital Oven Thermometer

Range	-50 to 300 °C
Resolution	1 °C/F
Accuracy	±1 °C (-20 to 120 °C)
Battery & life	2 x 1.5 volt AAA - 5,000 hours
Alarm volume	70dB
Sensor type	Thermistor
Display	Custom LCD
Dimensions	24 x Ø80 mm
Weight	97 grams

# CHEFALARM® THERMOMETER & TIMER

- Interchangeable Pro-Series probes
- Programmable high/low alarm

The ChefAlarm is a professional cooking thermometer and timer which displays the countdown/up time, current temperature and simultaneously displays both the high/low alarms and max/min temperatures.

The timer is fully programmable, allowing the user to set the countdown/up time to/from 99 hours and 59 minutes. The unit incorporates a large, easy-to-read LCD display with user selectable backlight and a loud audible alarm with adjustable volume to 92dB.

The ChefAlarm also includes a calibration function allowing the user to fine-tune the accuracy of the thermometer (±2.2 °C). The unit is housed in a water-resistant casing and is designed to either sit on a worktop or attach to an appliance using the magnetic pads at the rear of the instrument.

Each unit is supplied in a zip wallet complete with a penetration probe (810-071) and probe holder clip. See website for full probe specification.

Order code	Description	£ each
810-041	ChefAlarm - white	42.00
830-157	Protective zip wallet	11.00
830-310	Probe spool	7.00



- Protective zip wallet (830-157)

- Probe Spool (830-310)

Keep your probes safe and organised. Supplied with an in-built magnet to allow fixing on any metal surface.



## Specification ChefAlarm

Range	-50 to 300 °C
Resolution	0.1 °C/F
Accuracy	±1 °C (-20 to 120 °C)
Battery & life	2 x 1.5 volt AAA - 5,000 hours
Alarm volume	<92dB
Sensor type	Thermistor
Display	Custom LCD
Dimensions	19 x 70 x 152 mm
Weight	165 grams

# MILK FROTHING THERMOMETERS

- Easy-to-read dial with colour-coded zones
- Colour-coded pack available

The barista milk frothing thermometers incorporate a °C/°F dial with colour-coded zones that make them fast and simple-to-use.

Measuring over the range of -10 to 110 °C, these thermometers are available in two probe lengths and dial sizes. Each thermometer is supplied with a stainless steel jug mounting probe clip, plastic calibration spanner and protective probe cover.

Also available as a pack of three colour-coded milk dial thermometers (red, green and blue) for barista's to easily identify different types of milk used in stainless steel jugs, to avoid cross-contamination.



Order code	Description	£ each
800-810	Ø25 x 130 mm milk dial	5.50
800-820	Ø45 x 130 mm milk dial	5.75
800-800	Ø45 x 175 mm milk dial	5.75
800-830	Ø45 x 175 mm milk dial - pack of 3	14.50
830-220	Ø4 mm probe holder clip	2.00



- Ø4 mm probe holder clip

This stainless steel probe holder clips onto the top of a jug, saucepan or similar to hold in place a temperature probe.

## DIGITAL MILK THERMOMETER

- 3 preset temperatures or set your own
- Clear, easy-to-read display

This new digital milk thermometer is a must-have for any barista. Designed to help you steam milk perfectly, the thermometer's alarm will sound when you reach or exceed the required temperature.

There are three preset temperatures: 60 °C, 65 °C and 70 °C (centigrade models) 140, 149, 158 °F (Fahrenheit model only). Alternatively, you can set your own required temperature by using the + or - buttons on the instrument.

Measuring over the range of 0 to 125 °C or 32 to 257 °F (model dependent), the unit includes a stainless steel probe clip, silicone cover, and auto power-off after 5 minutes. Available with green, red, blue band (matching cover) or black band (yellow cover) to easily identify different types of milk used in stainless steel jugs, to avoid cross-contamination. Choose between two lengths, 130 mm or 175 mm, to fit different milk jug sizes.

NEW



8 models available  
2 stem lengths  
130 mm or 175 mm  
(175 mm stem shown)



### Specification Digital milk thermometer

Range	0 to 125 °C / 32 to 257 °F
Resolution	1 °C / 1 °F
Accuracy	±1 °C / ±2 °F
Battery	2 x 1.5 volt LR44
Battery life	Minimum 9,000 hours (normal use)
Display	Custom LCD
Dimensions	39 x 42 x 173 (130 mm) / 216 mm (175 mm)
Weight	40 grams (130 mm) / 41 grams (175 mm)

Order code	Description	£ each
810-850	130 mm yellow cover (°F)	12.00
810-860	175 mm yellow cover (°F)	12.00
810-873	130 mm green cover (°C)	12.00
810-874	130 mm red cover (°C)	12.00
810-875	130 mm blue cover (°C)	12.00
810-883	175 mm green cover (°C)	12.00
810-884	175 mm red cover (°C)	12.00
810-885	175 mm blue cover (°C)	12.00


# FRYING OIL QUALITY TEST STRIPS

- Inexpensive, no sample preparation or special training required
- Use in cold oil under 40 °C

These Frying Oil Quality Test Strips will help you keep the quality of your fried food high, as well as helping save money by preventing the premature disposal of cooking oil. The test strips work equally well in animal, vegetable and A/V blend frying oil (shortening). They are sold in storage bottles of 100 Oil Quality Test Strips which includes an easy-to-read colour chart.

To test your fryer oil, hold the test strip by the long white end, and dip the test strip into the oil (max oil temperature 40 °C) so all of the coloured band is submerged. Hold the test strip in the oil for two seconds, then remove it and wait two minutes, next, compare the strip to the colour chart. It is recommended that the testing of the frying oil is carried out at the start of each shift/working day before the user starts to apply heat to the oil.

To ensure accuracy, the test strips should not be stored in humid conditions or in an area where they may be exposed to water or oil before use.

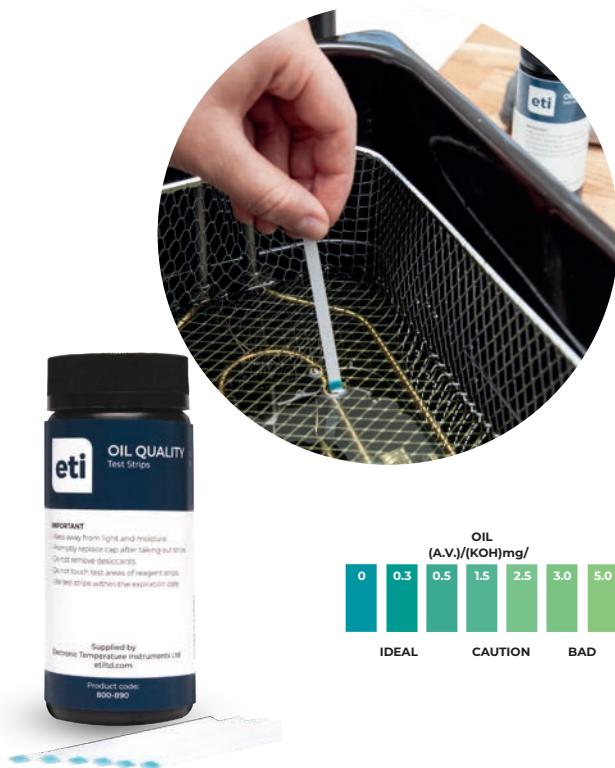

Order code	Description	£ each
800-890	Frying Oil Quality Test Strips x 100	36.00

## Ø50 mm frying thermometer



This frying thermometer incorporates a Ø50 mm dial and a pointed, stainless steel Ø4 x 150 mm probe and indicates temperature over the range of 0 to 300 °C in 10 °C divisions. The temperature of cooking oil is almost always between 177 °C and 190 °C although chips are better cooked at 200 °C.

Each unit is supplied with a stainless steel probe holder clip, ideal for clipping on to the side of pots and pans to hold in place a temperature probe. (see page 35).

Order code	Description	£ each
800-805	Frying thermometer	5.50

## Confectionery & jam thermometers



This stainless steel thermometer indicates temperature over the range of 40 to 200 °C and 100 to 400 °F in 2 °C/°F divisions. The casing incorporates a retaining clip and measures 50 x 240 mm plus a 65 mm plastic handle.

The thermometer's scale is clearly marked for hard crack, soft crack, hard ball, soft ball, thread, jam, caramel, sterilising and deep fry.

The traditional brass thermometer indicates temperature over the range of 40 to 200 °C in 2 °C divisions. The thermometer's brass casing measures 47 x 200 mm plus a 40 mm handle.

The thermometer's scale is clearly marked for caramel, crack, hard ball, soft ball, jam and sterilise.



Order code	Description	£ each
800-806	Cook's thermometer	11.00
800-808	Brass sugar & jam thermometer	19.00

# ANTI-BACTERIAL WIPES & LOG BOOK

Anti-Bacterial wipes are ideal for reducing harmful bacteria in the food industry. Each wipe is pre-saturated with a broad spectrum anti-bacterial solution that is odourless and does not taint food. The wipes are effective against a wide range of bacteria including listeria and salmonella.

## Tubs of 180 QAC free Probe Wipes



This stainless steel wall bracket enables a single tub of 180 wipes to be conveniently positioned to dispense wipes at work-stations and counters, or wherever the user requires.



- Stainless steel wall bracket  
832-305

Each tub contains 180 blue QAC free, anti-bacterial Probe Wipes that measure 130 x 130 mm.

The tubs are supplied in cartons of six tubs of 180 Probe Wipes.

An optional wall bracket is available, enabling a single tub of wipes to be conveniently positioned. (screws not supplied).

## Single-use Probe Wipes



These convenient, single-use, white, anti-bacterial Wipes are safe and easy-to-use and designed for one-time use.

836-220 Box of 100, each wipe measures 30 x 60 mm

Order code	Description	£ each
836-220	Box of 100 single use Probe Wipes	6.00

## Temperature log book



Each log book allows the user to enter three readings per day consisting of the temperature, the time and the initials of the person responsible for recording the data.

Log books are available as singles or a pack of ten log books.

Order code	Description	£ each
831-100	A5 temperature log book	2.75
831-105	A5 log book - pack of 10	25.00

# REFERENCE THERMAPEN® THERMOMETER

- High accuracy with 0.01 °C or 0.1 °C resolution
- Backlight display

The Reference Thermapen thermometer is a high accuracy PT100 instrument that is supplied with a five-point UKAS Certificate of Calibration. Each certificate indicates deviations from standards at various check points: -18, 0, 40, 70 and 100 °C. Special points may be certified by arrangement with our UKAS calibration laboratory.

The Reference Thermapen thermometer is ideal for comparison checking of the accuracy of other thermometers and probes, when used in conjunction with a stable temperature heat or chill source. The instrument measures temperature over the range of -69.99 to 199.99 °C, featuring a user selectable resolution of 0.01 or 0.1 °C and an accuracy of  $\pm 0.05$  °C.

The Reference Thermapen incorporates a stainless steel, penetration probe ( $\varnothing 3.3 \times 108$  mm) that conveniently folds back through 180° into the side of the instrument when not in use.

## • ACCESSORIES

See page 5 for details

Order code	Description	£ each
222-215	Reference Thermapen	140.00
830-455	Silicone cover with magnets	10.00
832-002	S/steel wall bracket	13.00

The Thermapen is supplied in a zip pouch (830-001)



Specification	Reference Thermapen
Range	-69.99 to 199.99 °C
Resolution	0.01 °C or 0.1 °C - user selectable
Accuracy	$\pm 0.05$ °C (-30 to 149.99 °C) otherwise $\pm 0.2$ °C
Battery	1 x 1.5 volt AAA
Battery life	500 hours (without backlight)
Sensor type	PT100
Display	9.8 mm LCD
Dimensions	19.3 x 48.2 x 156.2 mm
Weight	115 grams
UKAS Certificate of Calibration included	

# REFERENCE THERMOMETERS

- 5-point UKAS Certificate of Calibration included
- Supplied complete with high accuracy probe

The Reference thermometers are high accuracy PT100 instruments that are supplied with a five-point UKAS Certificate of Calibration. Each certificate indicates deviations from standards at various check points: -18, 0, 40, 70 and 100 °C. Special points may be certified by arrangement with our UKAS calibration laboratory.

Each unit features a simple on/off push button with open circuit 'Err' and low battery indication, when applicable. The Reference Plus thermometer incorporates the additional features of a max/min and hold function.

The Reference thermometers are supplied with a permanently attached, high accuracy probe with 1/10th DIN PT100 sensor. The probe measures  $\varnothing 3.3 \times 130$  mm and is supplied with a one metre PVC lead.

Order code	Description	£ each
222-055	Reference	240.00
222-063	Reference Plus	260.00
830-221	Protective silicone cover - white	8.00
814-132	Comparator	46.00



Specification	Reference & Reference Plus
Range	-199.99 to 199.99 °C
Resolution	0.01 °C
Accuracy	$\pm 0.03$ °C (-49.99 to 149.99 °C) otherwise $\pm 0.1$ °C
Battery & life	3 x 1.5 volt AAA - 2,000 hours
Sensor type	PT100 1/10 <sup>th</sup> DIN
Display	10 mm LCD
Dimensions	25 x 56 x 128 mm
Weight	210 grams
UKAS Certificate of Calibration included	

# UKAS CALIBRATION

- Temperature range -100 to 250 °C
- Rapid turnaround
- Certified uncertainties (CMCs) from  $\pm 0.027$  °C
- Custom points available

Our in-house UKAS accredited calibration laboratory for temperature has a wide measurement range of -100 to 250 °C with a calibration and measurement capability of  $\pm 0.027$  °C. The laboratory can also measure resistance up to 1 MΩ (i.e. resistance decade boxes and PT100/RTD temperature simulators) and DC voltage 0 to 100 mV (i.e. thermocouple simulators and calibrators). Original UKAS Certificates provide proof that instruments and probes have been calibrated against nationally approved standards.

## ● Thermometers & Probes

Each UKAS Certificate indicates the deviations from standards at various check points, the standard being -18, 0, 40, 70 and 100 °C with a guaranteed uncertainty, dependant on the probe type. See calibration and measurement capability table below.

## ● Test Caps & Simulators

Each UKAS Certificate indicates the deviations from standards at specific check points (-18, 0, 3, 70 and 100 °C) to an uncertainty of  $\pm 0.06$  °C (resistance) or  $\pm 0.18$  °C (thermocouple).

## ● Data Loggers

Each UKAS Certificate indicates the deviations from standards at three check points (-18, 0 and 40 °C) to an uncertainty of  $\pm 0.06$  °C.



Order code	UKAS Certificate - Temperature	£ each
890-200-5	Instrument only standard 5-point	88.00
890-210-5	Instrument & probe system 5-point	78.00
890-215	Checker 3-point	76.00
890-230	Test cap 1-point	22.00
890-235	Simulator 5-point	88.00
890-240-3	Data logger 3-point	78.00

# PRODUCT INDEX

DESCRIPTION	PAGE NO.
Bi-metal dial thermometers	31, 33, 35-36
CaterTemp® thermometer	9
CaterTemp® Metal thermometer	9
ChefAlarm® thermometer & timer	34
Colour-coded thermometers	3-4, 6-8, 27, 29, 35
Comparator	17, 38
Confectionery & jam thermometers	36
Dial/Meat roasting	33
DishTemp® dishwasher thermometer	15
DOT - digital oven thermometer	34
EcoTemp® thermometer	26
Food Check thermometer	8
Fridge or freezer thermometers	29-31
Frying thermometer & frying oil test strips	36
Gourmet thermometer	6
Infrared (IR) thermometers	5, 16-17
Kits	11-12, 14
Log book	37
Micro Pocket thermometer	27
Milk - digital thermometer	35
Milk - frothing dial thermometers	35
Multi-Function thermometer	26
Oven thermometers	33-34
Pizza IR Thermometer	16
Pocket sized thermometers	27-28
Pro-Surface Thermapen® thermometer	4
Probes - K or T thermocouple	21
Probes - NTC thermistor	13
Reference thermometers	38
RFX® MEAT	22
RFX® GATEWAY	23
Sizzle Thermometer	7
Sous Vide® Thermapen & sous vide kits	14
TempTag® Thermometer	29
Test caps	11
Therma 20 thermometer	11
Therma 22 & 22 Plus thermometers	12
Therma 20 Metal thermometer	10
Therma K Metal thermometer	10
ThermaData® loggers	18-21
ThermaData® Thermocouple logger	18
ThermaData® Thermistor logger	19
ThermaData® WiFi loggers	20-21
ThermaLite® thermometers	6
Thermamite® thermometer	8
Thermapen® IR thermometer	5
Thermapen® ONE thermometer	3
Thermapen® thermometers	3-5, 14, 38
ThermaPod USB logger	25
ThermaProbe® thermometer	27
ThermaStick® thermometer	27
Timers	32, 34
UKAS temperature calibration	39
Waterproof thermometers	3, 6-7, 9-10, 12, 15, 18-19
Wipes - probe	22-24, 27-28, 32, 38
	37



Subscribe to the ETI  
email newsletter:



British Manufacturer

**ELECTRONIC TEMPERATURE INSTRUMENTS LTD**  
Worthing · West Sussex · BN14 8HQ  
01903 202151 · [sales@etilt.com](mailto:sales@etilt.com) · [etilt.com](http://etilt.com)



771-2625/2026

ETI stand as a proud British exporter and since 2012 have won **four Queen's Awards for Enterprise**.