

# Movable drying racks, essential for a quick and efficient work process




**STANDARD AND  
CUSTOM-MADE  
DRYING RACKS**

**Available in various configurations.  
Choose from our wide range of products or  
enquire about a customised solution.**

# TRIVECPAINT

## UNIQUE ADVANTAGES

### The unique advantages of TrivecPaint adjustable drying racks

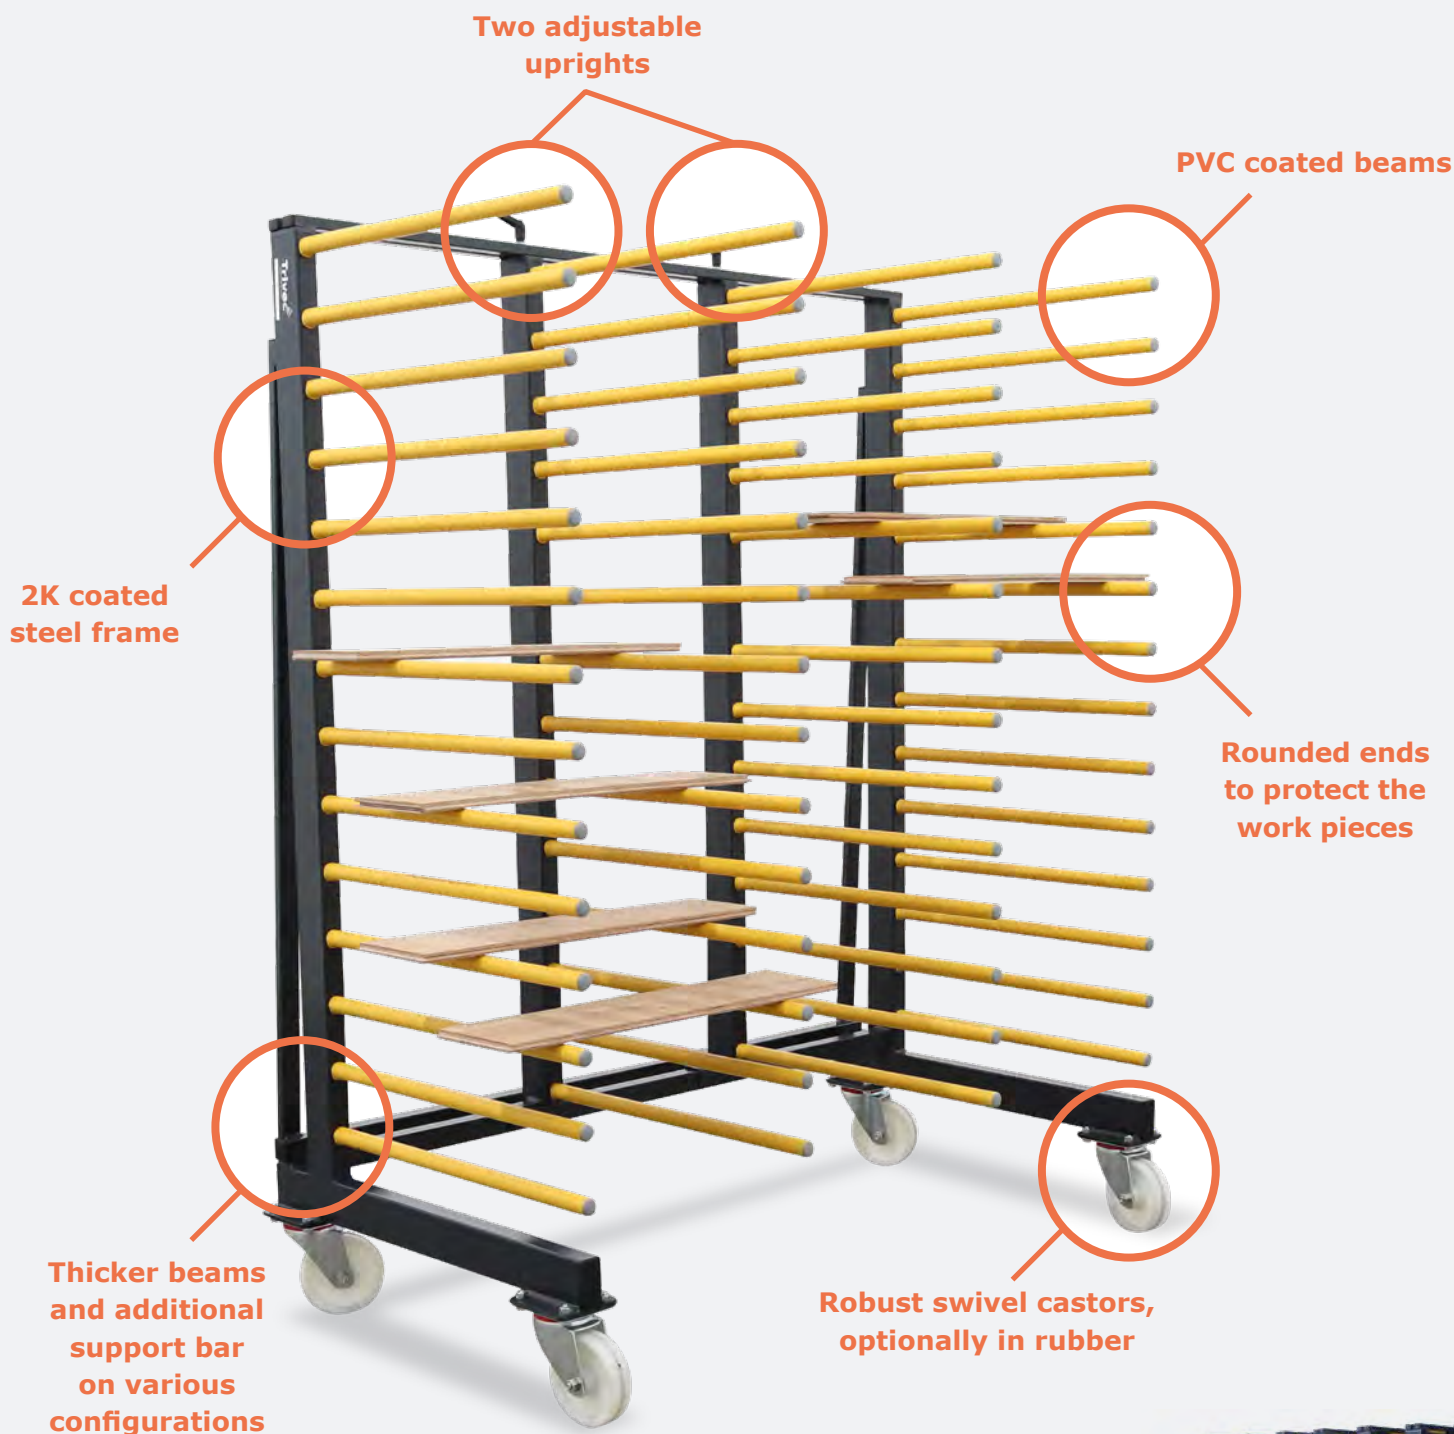

#### Choose your model

Choose the drying rack that fits your business operations. In need for a custom solution? Contact us for additional support and options, we love a good challenge.

#### Nesting feature

The Trivec drying racks can be nested together to save space when not in use.



# TRIVECPAINT

## STANDARD DRYING RACKS



Suitable for storing long and solid work pieces such as beams, doors and panels that are not prone to sagging.

This drying rack can be fitted with additional uprights.

up to  
**250**  
kg

### VEC 250B

#### Specifications

Carrying capacity:

250 kg

Dimensions HxWxD:

1950/1500/750 mm

Number of uprights:

2 fixed uprights

Moveable uprights:

None

Number of levels:

14

Level height:

90 mm

Loading depth:


670 mm



Version with one movable middle upright. Workpieces that are vulnerable to sagging are optimally supported in this way. Also suitable for storing and drying alternating lengths.

This drying rack can be fitted with up to 4 additional uprights.

up to  
**350**  
kg



ADJUSTABLE  
SIDEWAYS

### VEC 350S

#### Specifications

Carrying capacity:

350 kg

Dimensions HxWxD:

1950/1500/750 mm

Number of uprights:

2 fixed uprights

Moveable uprights:

1

Number of levels:

14

Level height:

90 mm

Loading depth:

670 mm



With two adjustable uprights, it can be adjusted to almost any size workpiece. Suitable for furniture panels, kitchen fronts, herringbone parquet and parts of varying length. The uprights can be adjusted to the size of the workpieces easily and without tools.

up to  
**350**  
kg



ADJUSTABLE  
SIDEWAYS

### VEC 350SW

#### Specifications

Carrying capacity:

350 kg

Dimensions HxWxD:

1950/1500/750 mm

Number of uprights:

2 fixed uprights

Moveable uprights:

2

Level height:

14

Etagehoogte:

90 mm

Loading depth:

670 mm

# TRIVECPAINT

## DRYING RACKS WITH HIGHER LOAD CAPACITY



Suitable for storing solid workpieces such as beams, (solid) doors and panels that are not vulnerable to sagging. Drying racks with a higher load capacity have a heavier frame and thicker beams.



HEAVY-DUTY FRAME

**OPTIONAL**  
LOADING DEPTH 1000 MM

up to  
**400**  
kg

### VEC 400B

#### Specifications

Carrying capacity:

400 kg

Dimensions HxWxD:

1950/1500/750 mm

Number of uprights:

2 fixed uprights

Moveable uprights:

None

Number of levels:

14

Level height:

90 mm

Loading depth:

670 or 1000 mm



Version with one movable middle upright. Suitable, among other things, for parts of varying lengths. Because of the support offered by the additional middle upright, parts that are vulnerable to sagging can also be placed.



ADJUSTABLE SIDEWAYS



HEAVY-DUTY FRAME

**OPTIONAL**  
LOADING DEPTH 1000 MM

up to  
**700**  
kg

### VEC 700S

#### Specifications

Carrying capacity:

700 kg

Dimensions HxWxD:

1950/1500/750 mm

Number of uprights:

2 fixed uprights

Moveable uprights:

1

Number of levels:

14

Level height:

90 mm

Loading depth:

670 or 1000 mm



With two movable uprights, the rack can be adjusted to almost any workpiece size. Suitable for furniture panels, kitchen fronts, herringbone parquet and parts of various lengths. The middle uprights can be adjusted to suit your workpieces, tool-free.



ADJUSTABLE SIDEWAYS



HEAVY-DUTY FRAME

**OPTIONAL**  
LOADING DEPTH 1000 MM

up to  
**700**  
kg

### VEC 700SW

#### Specifications

Carrying capacity:

700 kg

Dimensions HxWxD:

1950/1500/750 mm

Number of uprights:

2 fixed uprights

Moveable uprights:

2

Number of levels:

14

Level height:

90 mm

Loading depth:

670 or 1000 mm

# TRIVECPAINT

## DRYING RACKS WITH EXTRA FLEXIBILITY



Can be used as a flexible and multi purpose drying rack in various situations and spaces. Suitable for drying varying lengths. Tool-free adjustability from 600 to 1500 mm.



ADJUSTABLE  
SIDEWAYS

**EXPANDABLE**

up to  
**300**  
kg

### VEC 300ADJ

#### Specifications

Carrying capacity:

300 kg

Dimensions HxWxD:

1950/600-1500/750 mm

Number of uprights:

4 fixed uprights

Moveable uprights:

-

Number of levels:

14

Level height:

90 mm

Loading depth:

670 mm



Features even more flexibility with detachable beams. Ideal for workpieces such as beams and frames where the standard 90 mm height is not sufficient or differs per production run.



DETACHABLE  
BEAMS



ADJUSTABLE  
SIDEWAYS



HEAVY-DUTY  
FRAME

**POSITION BEAMS  
AS YOU REQUIRE**

up to  
**700**  
kg

### VEC 700SW DET

#### Specifications

Carrying capacity:

700 kg

Dimensions HxWxD:

1950/1500/1400 mm

Number of uprights:

2 fixed uprights

Moveable uprights:

2

Number of levels:

0-14

Level height:

Minimaal 90 mm

Loading depth:

670 - 1000 mm

## DOUBLESIDED DRYING RACKS AND CUSTOM BUILDS



Should you require a drying rack with different dimensions or load capacity, please contact us. We are happy to help.



ADJUSTABLE  
SIDEWAYS

up to  
**700**  
kg

#### Specifications

Carrying capacity:

700 kg

Dimensions HxWxD:

1950/1500/1400 mm

Number of uprights:

2 fixed uprights

Moveable uprights:

0 - 6

Number of levels:

14 per zijde

Level height:

90 mm

Loading depth:

670 mm

## Trivec fan trolley



The ventilator trolley is an aid for speeding up the drying process by applying a constant airflow over the workpiece surface. The trolley is a supplement to the Trivec drying racks. An even air flow across all layers of workpieces in the paint drying rack significantly speeds up the drying process. The fan trolley with robust swivel castors (with brake) has two air flow settings and a tiltable fan module.

### Specifications

Length:	Ventilator diameter:
600 mm	800 mm
With:	Airflow:
1000 mm	9180 - 10200 m <sup>3</sup> /h
Height:	Power supply:
1900 mm	230 V
Power:	Ventilator speeds:
Max. 0,4 kW	2

## Trivec rotary spray table



Practical tool for example, spraying kitchen fronts, panels, stairs, or other similar types of workpieces. The adjustable arms are each equipped with two pivoting points, allowing them to support virtually any shape or size.

### Specifications

Carrying capacity:
100 kg
Adjustable height:
750 - 1000 mm
Width:
0 - 1200 mm
Depth:
0 - 800 mm



RUBBER  
PROTECTION  
CAPS



PROTECTION  
AGAINST STAINS  
ON HINGED  
PARTS

**Haven't found the right solution yet? Contact us for the possibilities.  
We will gladly advise you about the appropriate solution.**

**Trivec**paint  
equipment

Trivec Paint & Eco Equipment

Showroom (by appointment only) Barn 2, Greens Norton Park, Blakesley Hill, Greens Norton NN12 8DP | Great Britain  
+44 7900 224 429 | tim@trivecpainteco.com | www.trivecpaint.co.uk