




DOUBLE OAK
ENGINEERED FLOORING

Manufacturing excellence since 1999



ADVANCED DOUBLE OAK STRUCTURE

- Symmetrical, true balanced, double oak construction for maximum all-dimensional stability
- Ideal for underfloor heating
- Eco-friendly, high quality materials
- Rich palette of colours, tones and finishes
- Chevron and herringbone patterns available
- 100% European product

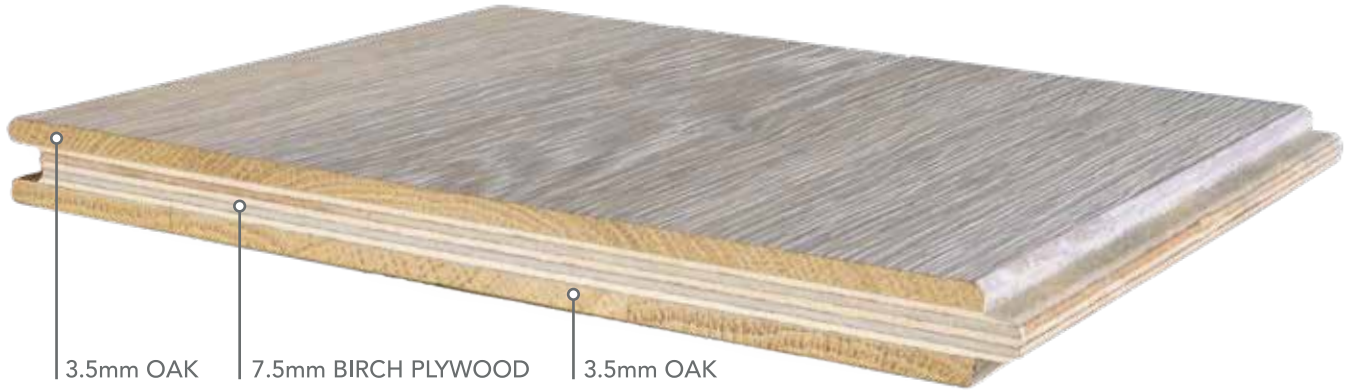

WHAT WE ARE PROUD OF





A close-up photograph of oak wood grain, showing vertical lines and natural variations in color from light tan to medium brown. The texture is smooth and detailed.

EXTRA WHITE

The beauty of oak
in a white shade



OCEAN BREEZE

Tailor - made

Currents of calm





NATURAL OAK

Brimming with classic





EBONY

Refined simplicity



A close-up photograph of a walnut wood surface, showing a rich, dark brown color with prominent, vertical, wavy grain patterns and some natural knots. The lighting is even, highlighting the texture of the wood.

WALNUT

Elegant and relaxing



WATERFALL
Tailor - made

Cascades of nature
to fall in love with



WILD ROSE

Tailor - made

Artistic and impressive





ANTIQUE

Genuinely distinguished



ANTHRACITE

Tailor - made

Consistent integrity



The background of the entire image is a close-up, vertical wood grain texture. The wood has a warm, medium-brown tone with prominent, dark, wavy vertical lines representing the grain. The texture is consistent throughout the image.

GRAPHITE

Strong mineral warmth





GREY

Brilliance in oak




NORDIC WHITE

Tailor - made

Why white?
My life is colourful



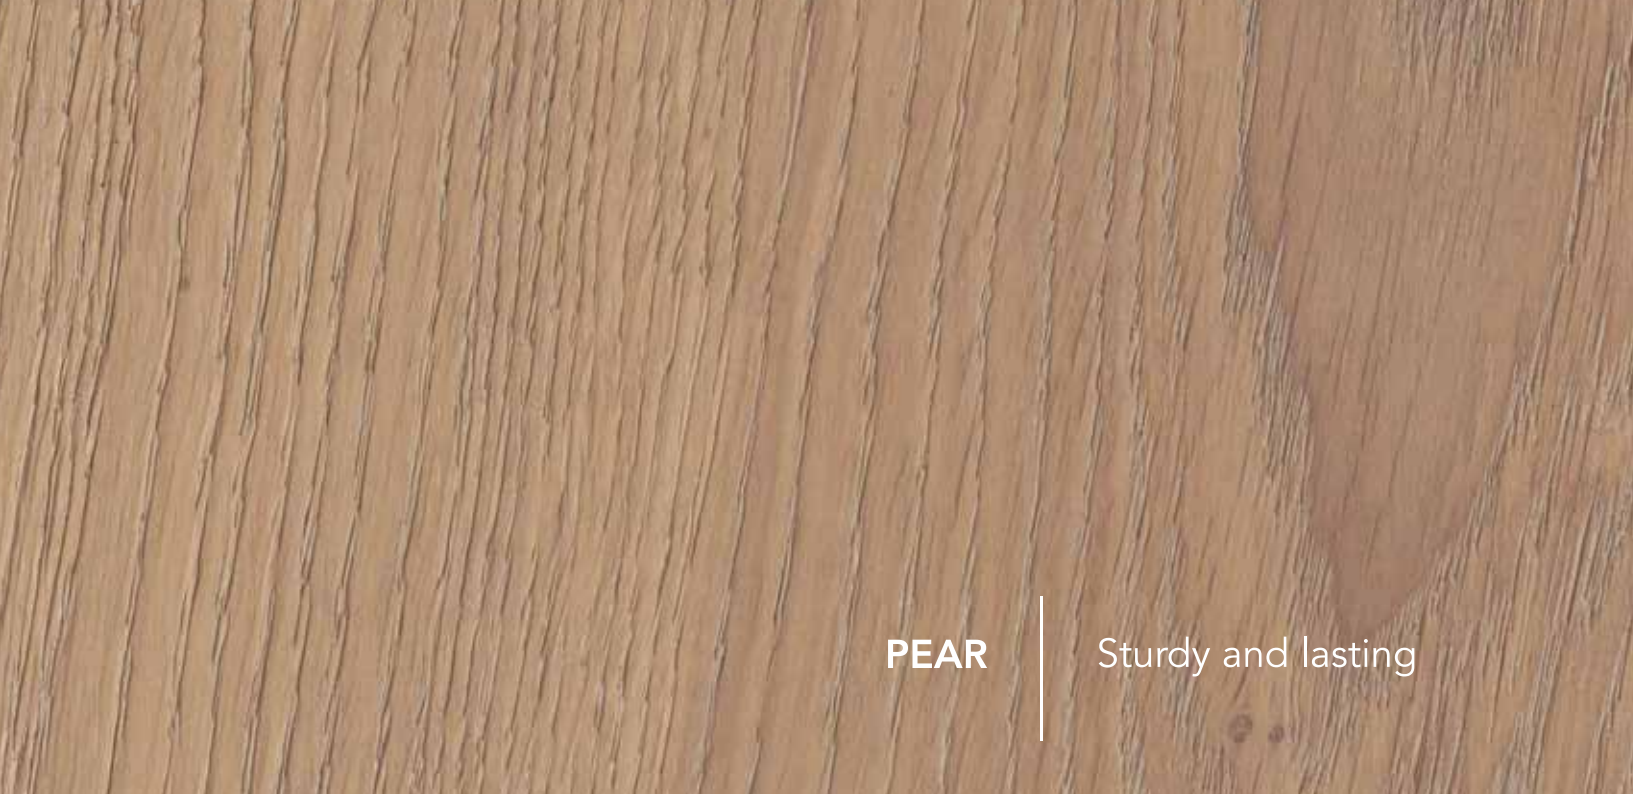

PEAR

Sturdy and lasting



The background of the entire image is a close-up, vertical view of a wood grain. The grain is composed of numerous vertical lines of varying thickness and color, ranging from light tan to a medium brown. The texture is natural and organic, with some areas showing more pronounced grain patterns than others.

WHITE TRANSPARENT

Like alabaster,
translucent and soft



FOREST LAKE

Tailor - made

Soul refreshing



COGNAC

Tailor - made

Powerfully intoxicating



DEEP BLACK

Tailor - made

Timelessly classic



NATURALE

Tailor - made

In harmony with nature





ROSEWOOD

A subtle flush of red blush



The background is a close-up of a wood grain, showing vertical lines and a central knot. A thin white vertical line is positioned to the right of the text.

SILVER DUST

Tailor - made

Like a shimmering sunset





CASK

Stunning representation
of the original



DUNES
Tailor - made

Nature framed in
your flooring



A close-up photograph of a light-colored wood grain, specifically a 'light nut' finish. The wood has a warm, golden-brown hue with prominent, vertical, wavy grain patterns. The texture is smooth and natural, showing the characteristic growth rings and fibers of the wood.

LIGHT NUT

Cool and effortless



TOBACCO

Tailor - made

Jazzy and soulful



SILK
Tailor - made

Glowing strength



A close-up photograph of birch wood grain, showing a fine, vertical, wavy pattern with a warm, light brown color palette. The texture is smooth and consistent across the surface.

BIRCH

Neutrally vibrant



IVORY
Tailor - made

Peace and harmony



BROWN COFFEE

Tailor - made

Awakening illusion



MODERN CONCRETE

Tailor - made

Strength of texture



STEEL
Tailor - made

Bold and beautiful



CASCADE

Tailor - made

Blend of sophistication
and elegance



DARK CHOCOLATE

Tailor - made


Rich and velvety



PATTERNS

CHEVRON 30°

14.5 x 115 x 575mm
14.5 x 115 x 690mm
14.5 x 140 x 700mm
14.5 x 140 x 840mm

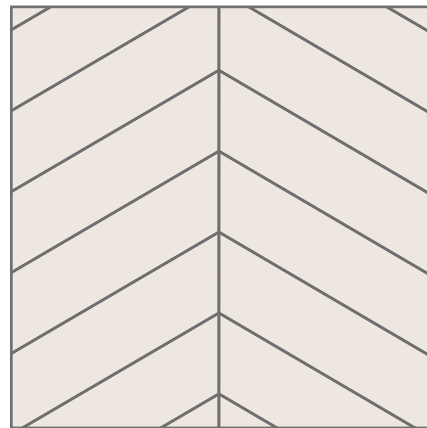


A close-up photograph of a wood-look floor featuring a chevron pattern. The planks are arranged in a V-shape, with each plank rotated 30 degrees relative to the horizontal. The wood grain is a mix of light and dark brown tones, with visible knots and natural grain patterns. The lighting is even, highlighting the texture of the wood.

CHEVRON 30°

PATTERNS

CHEVRON 45°

14.5 x 115 x 575mm
14.5 x 115 x 690mm
14.5 x 140 x 700mm
14.5 x 140 x 840mm

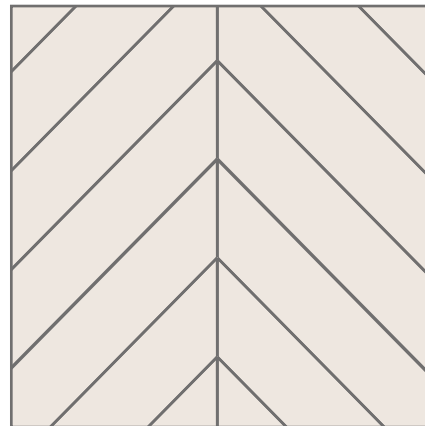



CHEVRON 45°

PATTERNS

HERRINGBONE 90°

14.5 x 115 x 575mm


14.5 x 115 x 690mm

14.5 x 140 x 700mm

14.5 x 140 x 840mm

14.5 x 85 x 425mm

Other dimensions are available on request.

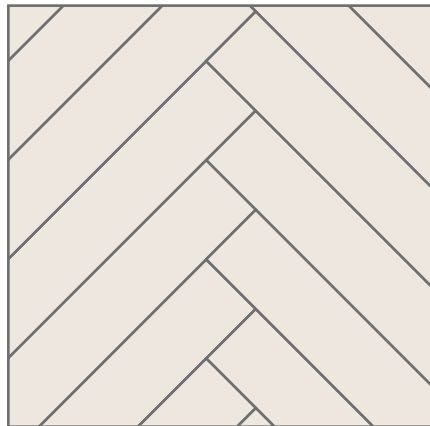

A close-up photograph of a wood floor with a herringbone pattern. The planks are arranged in a V-shape, with each plank rotated 90 degrees relative to the others. The wood has a rich, dark brown color with prominent, wavy grain patterns. The lighting is soft, highlighting the texture and natural imperfections of the wood.

HERRINGBONE 90°





CHARACTER GRADE

Oak floorboards have knots, more colour variations, natural micro-cracks. Boards of this nature feature contrasting wood patterns with sound (live) knots and larger filled knots that are not limited. Core boards may also be present. Knots emphasise the liveliness of the wood, and the variety of colours reveals its true beauty.





SELECT GRADE

Oak floorboards have small, moderate knots and natural colour differences. A limited number of knots, both small and larger, healthy, and filled, emphasises the oak's natural beauty. Sapwood and core boards are not permitted. There are many interior solutions that work well with these expressive and reserved oak floorboards.





PRIME GRADE

Oak floorboards are characterised by low variations in colour, and only single, small sound (live) knots are approved in their manufacturing process. Both natural oak colours and multilayer (natural oil) finishes look great on such floorboards.



Our recommended installation method is to glue planks to the subfloor to ensure maximum stability

INSTALLATION GUIDE

- The humidity of the environment should be within the range of 40 – 65%
- Wall moisture content should be 2%
- Screed moisture content shouldn't exceed 1.5%
- If you have underfloor heating, the sub-floor temperature should be between +18° - +21°C and must be maintained during and at least three days after installation

- The room temperature should be between +18° - +24°C
- Use glue that doesn't contain water
- Leave a gap of 1cm - 1.5cm from the walls
- Only raise the heating temperature by 2°- 3°C a day
- The maximum heating temperature cannot exceed +27°C

PLANK DIMENSIONS

THICKNESS: 14.5mm, 18mm

WIDTHS: 115mm, 140mm, 180mm, 230mm

LENGTHS: Random lengths averaging 2000mm (1000mm - 2400mm)
Short and medium length boards available on request

COMPARISON

	PREMIUM BALANCED DOUBLE OAK FLOORING (ECO HARDWOOD)	MULTI-PLY FLOORING (SOFTWOOD BASE)	MULTI-PLY FLOORING (BIRCH PLYWOOD BASE)	SOLID OAK FLOORING
100% REAL WOOD FLOOR	YES	YES	YES	YES
OAK AMOUNT (%) IN 1M ²	48.28%	16-27%	16-27%	100%
WOOD SHRINKAGE & SWELLING	MINIMIZED	INTERMEDIATE	INTERMEDIATE	HEAVY
FLOORBOARD STABILITY	PERFECT	GOOD	GOOD	AVERAGE
UNDERFLOOR HEATING SUITABILITY	PERFECT	SUITABLE	SUITABLE	NOT RECOMMENDED
ROOMS WITH VARYING CONDITIONS	PERFECT	SUITABLE	SUITABLE	NOT RECOMMENDED
USE IN KITCHENS & BATHROOMS	SUITABLE	NOT RECOMMENDED	NOT RECOMMENDED	NOT RECOMMENDED
LASTS A LIFETIME	YES	YES	YES	YES



WE ARE ECO-FRIENDLY

- Highest standards of responsible forest management
- FSC® certified (FSC® C007915)
- Formaldehyde-free PU glue
- Finished with eco-friendly Saicos oil (which is also used to make children's toys)
- Sustainable use of renewable energy in manufacturing our products
- To reduce our carbon footprint, we only source materials from Europe
- Our team plants over 2000 oak trees every spring as part of our contribution to European forestry



Ecohardwood Ltd, 191 Field End Road, Pinner, HA5 1QR, London
020 3759 0771, info@ecohardwood.co.uk, ecohardwood.co.uk

