

TS 4 E

TS 4 VP

Main Data	TS 4 E	TS 4 VP
Capacity, kg/lbs	4 (8.8)	4 (8.8)
Hanging length, m (ft)	16 (52.5)	16 (52.5)
Heating effect, kW	1.5	-
Part no	131041	131040
Consumption data, normal temperature		
Drying time, min	120	90
Energy consumption, kWh*	2.5	1.2

*Drying of 4 kg cotton (dry weight) washed and high-spinned.

TS 43 E/VP

Compact Drying Cabinets

TS 43 and TS 43 VP are excellent drying cabinets, perfect for rooms where space is limited. The cabinets are 60 cm (23.4 inches) wide and holds 4 kg (8.8 lbs) of laundry. They are equipped with an extendible hanging system which simplifies the laundry operation.

Drying cabinets are great complements to tumble dryers since they dry without any mechanical action. In TS 43 E all controls and electrical components are placed in a pull-out fan package which makes it easy to repair and maintain. TS 43 VP uses heat pump technology for an even more efficient and gentle drying.

Details

- Capacity 4 kg (8,8 lbs)
- Hanging length 16 m (52,5 ft)
- Energy consumption 2,5 resp. 1,2 kWh
- Compact design
- Control panel with LCD
- Two humidity controlled automatic programs
- Timed drying - TS 43 E
- Extendible hanging system
- The door can be ordered right or left hanged - TS 43 E
- Overheat protection
- Baskets as optional extra
- Hook rack as optional extra
- Touch buttons - TS 43 VP
- 5 selectable languages - TS 43 VP

About PODAB

PODAB is a Swedish company that has been in the laundry business since 1945. We develop, manufacture and market quality products at competitive prices for multiple apartment buildings, laundry rooms and for professional use.

Contact us




If you have any questions, please feel free to contact us on 020 8936 7083. You can also visit our website at www.podab.co.uk.

Drying Cabinet		TS 43 E	TS 43 VP
Electrical connections	Phase/Voltage/Frequency	1~N/230V/50-60Hz	1~N/230V/50-60Hz
	Total effect, kW	1.54	0.9
	Fuse, A	10	10
	Cable length, mm (inch)	2000 (78.7)	2500 (98.4)
Air connections	Outlet exhaust, Ø mm (inch)	100 (3.93)	-
	Outlet air flow, m³/h (ft³/h)	45 (1589)	-
Heat pump	Condensate pipe, Ø mm (inch)	-	13 (1/2)
	Refrigerant	-	R407C
	Amount of refrigerant, g (oz)	-	300 (10.6)
Optional extras	Air exchanger 1 vent., part no	141009	-
	Air exchanger 2 vent., part no	141018	-
Sound level	Airborne sound level, dB(A)	60	52
Weight	Net, kg (lbs)	61 (134)	95 (209)
	Shipping data net, kg (lbs)	65 (143)	100 (220)

Front

Left Side

Rear Side

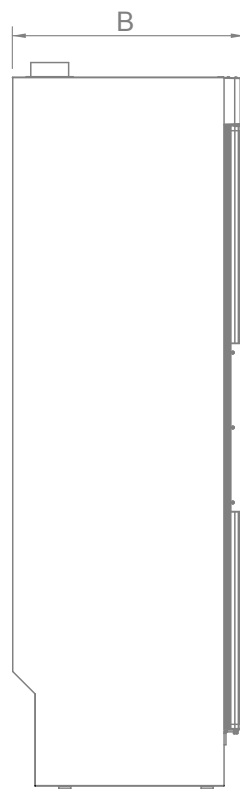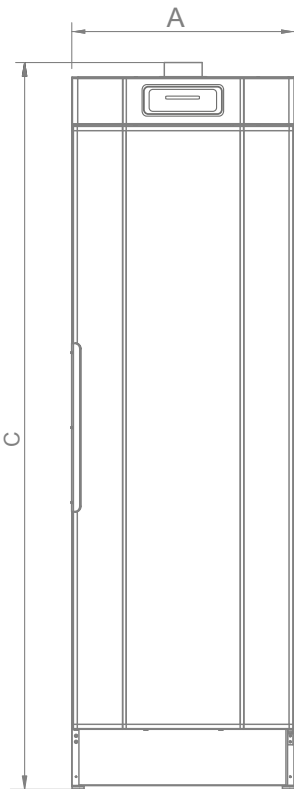

Dimensions, mm (inch)	A	B	C	D
	Width	Depth	Height	Exhaust position from back
TS 43 E	595 (23.4)	619 (24.4)	1939 (76.3)	100 (3.9)
TS 43 VP	595 (23.4)	675 (26.6)	1925 (75.8)	-



2014-11-30. Changes can be made without prior notice.