

FlexiPlumb

Flexible Plumbing Fittings



KEY FEATURES

-  Flexible connection to compensate for plumbing misalignment.
-  Quick and easy to install and remove.
-  Adjustable and can be used on mismatched pipe sizes.
-  Allows for easy access for pipework servicing and repairs.
-  Creates an excellent seal around existing pipework.
-  Highly durable and suitable for long term application.
-  Compatible with conventional solvent weld, push fit and compression waste systems.
-  No adhesives required.

SPECIFICATION

Material - EPDM Rubber
(Ethylene Propylene Diene Monomer)

Made to British & European
Standard - BS-EN-681-1

High resistance to water, heat,
chemicals aging and ozone/weathering.

Operating Temperature - 15°C-130°C

Fastened with Stainless-Steel worm
drive hose clamps.



Environmental
Products and Services Ltd

Award Winning Technology


www.epas-ltd.com

sales@epas-ltd.com

HEAD OFFICE +44 (0) 28 3083 3081


GB OFFICE +44 (0) 161 477 5555

FLEXIPLUMB - STRAIGHT CONNECTOR




Fitting Size	34mm (1¼")	40mm (1½")	54mm (2")
(A) Internal Diameter	34mm (1.3")	40mm (1.6")	54mm (2.1")
(B) External Diameter	45mm (1.8")	51mm (2")	65mm (2.6")
(C) Insertion Depth	30mm (1.2")	33mm (1.3")	36mm (1.4")
(D)	64mm (2.5")	70mm (2.8")	76mm (3")

FLEXIPLUMB - 90° BEND

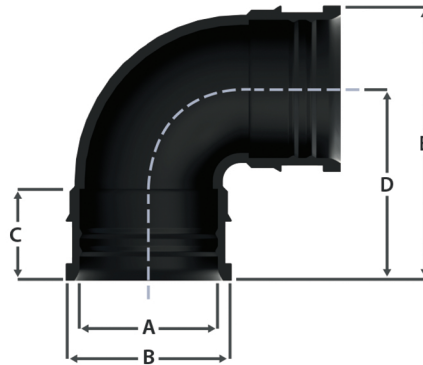


Fitting Size	34mm (1¼")	40mm (1½")	54mm (2")
(A) Internal Diameter	34mm (1.3")	40mm (1.6")	54mm (2.1")
(B) External Diameter	45mm (1.8")	51mm (2")	65mm (2.6")
(C) Insertion Depth	30mm (1.2")	33mm (1.3")	36mm (1.4")
(D)	57mm (2.2")	64mm (2.5")	75mm (3")
(E)	80mm (3.1")	90mm (3.5")	108mm (4.3")

FLEXIPLUMB - 45° BEND

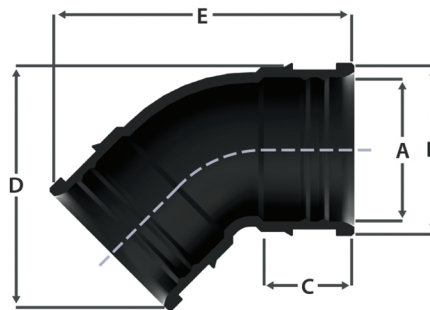


Fitting Size	34mm (1¼")	40mm (1½")	54mm (2")
(A) Internal Diameter	34mm (1.3")	40mm (1.6")	54mm (2.1")
(B) External Diameter	45mm (1.8")	51mm (2")	65mm (2.6")
(C) Insertion Depth	30mm (1.2")	33mm (1.3")	36mm (1.4")
(D)	68mm (2.7")	77mm (3")	93mm (3.7")
(E)	89mm (3.5")	99mm (3.9")	114mm (4.5")

FLEXIPLUMB - ADAPTOR REDUCER

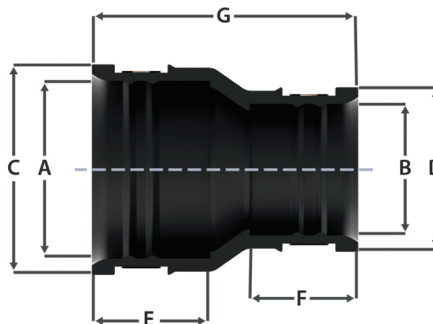


Fitting Size	34-40mm (1¼-1½")	34-54mm (1¼-2")	40-54mm (1½-2")
(A) Internal Diameter 1	34mm (1.3")	34mm (1.3")	40mm (1.6")
(B) Internal Diameter 2	40mm (1.6")	54mm (2.1")	54mm (2.1")
(C) External Diameter 1	44mm (1.7")	44mm (1.7")	50mm (2")
(D) External Diameter 2	50mm (2")	64mm (2.5")	64mm (2.5")
(E) Insertion Depth 1	30mm (1.2")	30mm (1.2")	33mm (1.3")
(F) Insertion Depth 2	33mm (1.3")	36mm (1.4")	36mm (1.4")
(G)	75mm (3")	78mm (3.1")	81mm (3.2")

FLEXIPLUMB - TEE CONNECTOR

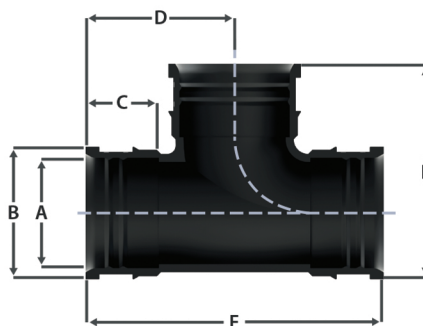


Fitting Size	34mm (1 1/4")	40mm (1 1/2")	54mm (2")
(A) Internal Diameter	34mm (1.3")	40mm (1.6")	54mm (2.1")
(B) External Diameter	45mm (1.8")	51mm (2")	65mm (2.6")
(C) Insertion Depth	30mm (1.2")	33mm (1.3")	36mm (1.4")
(D)	57mm (2.2")	66mm (2.6")	73mm (2.9")
(E)	80mm (3.1")	92mm (3.6")	106mm (4.2")
(F)	114mm (4.5")	132mm (5.2")	146mm (5.7")

FLEXIPLUMB - ENDCAP

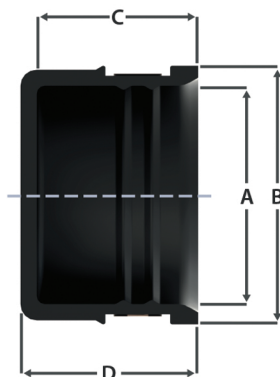


Fitting Size	34mm (1 1/4")	40mm (1 1/2")	54mm (2")
(A) Internal Diameter	34mm (1.3")	40mm (1.6")	54mm (2.1")
(B) External Diameter	46mm (1.8")	50mm (2")	64mm (2.5")
(C) Insertion Depth	30mm (1.2")	34mm (1.3")	40mm (1.6")
(D)	34mm (1.3")	38mm (1.5")	44mm (1.7")

FLEXIPLUMB - RUNNING TRAP

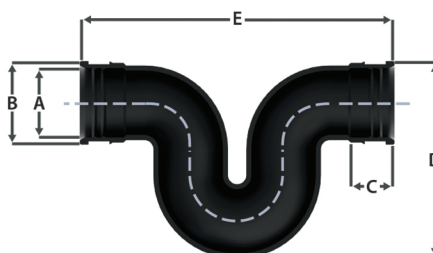



Fitting Size	34mm (1 1/4")	40mm (1 1/2")	54mm (2")
(A) Internal Diameter	34mm (1.3")	40mm (1.6")	54mm (2.1")
(B) External Diameter	45mm (1.8")	51mm (2")	65mm (2.6")
(C) Insertion Depth	30mm (1.2")	33mm (1.3")	36mm (1.4")
(D)	110mm (4.3")	124mm (4.9")	154mm (6.1")
(E)	180mm (7.1")	202mm (8")	244mm (9.6")

FLEXIPLUMB - P TRAP

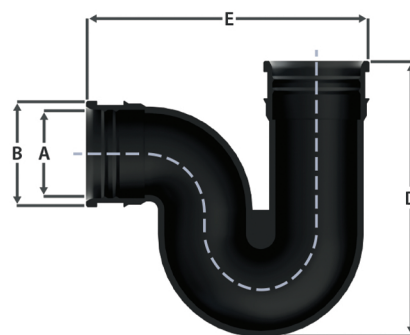


Fitting Size	34mm (1 1/4")	40mm (1 1/2")	54mm (2")
(A) Internal Diameter	34mm (1.3")	40mm (1.6")	54mm (2.1")
(B) External Diameter	45mm (1.8")	51mm (2")	65mm (2.6")
(C) Insertion Depth	30mm (1.2")	33mm (1.3")	36mm (1.4")
(D)	133mm (5.2")	143mm (5.6")	169mm (6.7")
(E)	128mm (5")	140mm (5.5")	174mm (6.9")

FLEXIPLUMB - SEWER BOSS

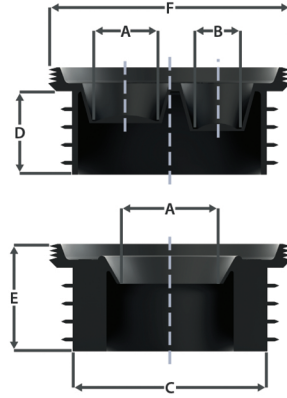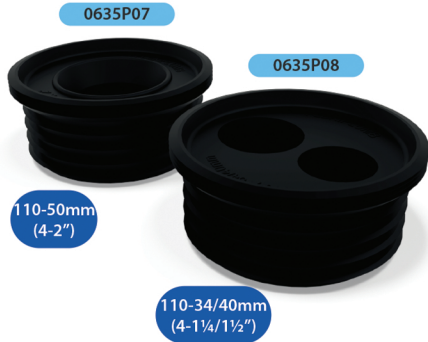



Fitting Size	110-34/40mm (4-1¼/1½")	110-50mm (4-2")
(A) Internal Diameter 1	34mm (1.3")	50mm (2")
(B) External Diameter	40mm (1.6")	N/A
(C) Insertion Depth	98mm (3.6")	98mm (3.6")
(D)	42mm (1.7")	42mm (1.7")
(E)	54mm (2.1")	54mm (2.1")
(F)	122mm (4.8")	122mm (4.8")

FLEXIPLUMB - SPACE SAVER RUNNING TRAP

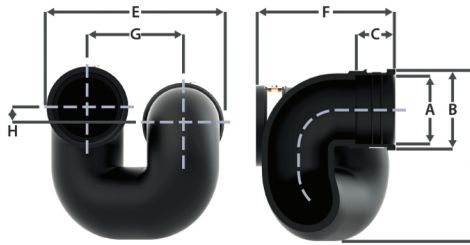


Fitting Size	54mm (2")
(A) Internal Diameter	54mm (2.1")
(B) External Diameter	65mm (2.6")
(C) Insertion Depth	32mm (1.3")
(D)	138mm (5.4")
(E)	141mm (5.6")
(F)	112mm (4.4")
(G)	76mm (3")
(H)	13mm (0.5")

FLEXIPLUMB - SAMPLING POINT

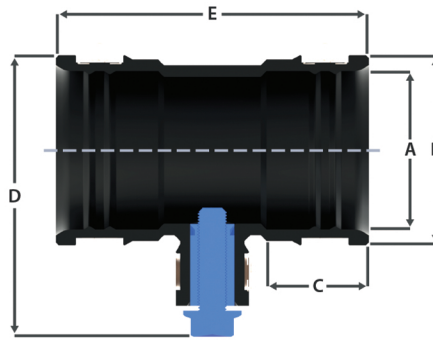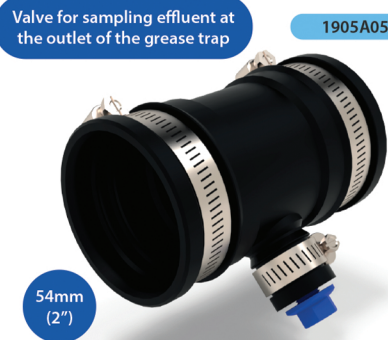

Fitting Size	54mm (2")
(A) Internal Diameter	54mm (2.1")
(B) External Diameter	65mm (2.6")
(C) Insertion Depth	35mm (1.4")
(D)	96mm (3.8")
(E)	107mm (4.2")

FLEXIPLUMB - VORTEX FLOW CONTROLLER

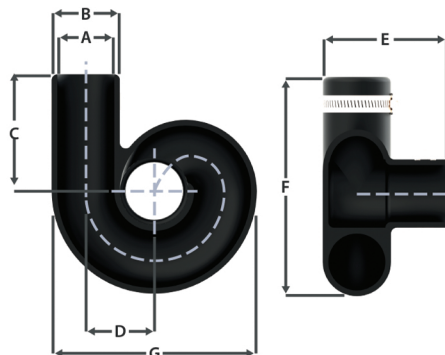

Fitting Size	40mm (1½")
(A) Internal Diameter	40mm (1.6")
(B) External Diameter	48mm (1.9")
(C) Insertion Depth	82mm (3.2")
(D)	48mm (1.9")
(E)	88mm (3.5")
(F)	154mm (6.1")
(G)	144mm (5.7")