


**GENUINE MERLO ATTACHMENTS  
FOR YOUR MACHINE**

TreEmme Attachments

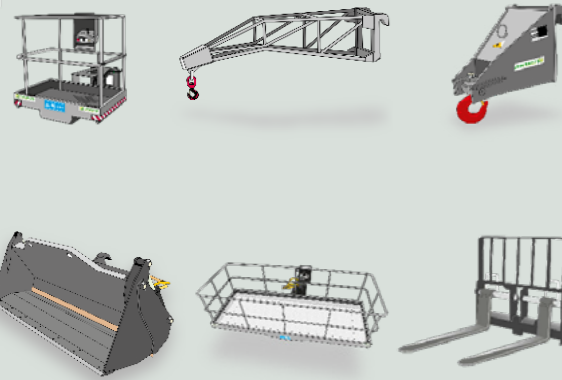

Many more attachments available.  
Speak to your local Merlo dealer:

**ELECTRIC**



**KEY FEATURES**

- ✓ 100% electric telehandler
- ✓ Compact and manoeuvrable
- ✓ Zero emissions, noise and fuel consumption
- ✓ 8 hour work cycle

**MIN TO MAX CAPACITY**



**COMPACT**



**KEY FEATURES**

- ✓ Compact & manoeuvrable
- ✓ Widest Cab of its class
- ✓ Hydraulic gear pump
- ✓ 40km/h, hydrostatic transmission

**MIN TO MAX CAPACITY**



**MEDIUM CAPACITY**



**KEY FEATURES**

- ✓ Powerful load sensing, flow sharing hydraulics for ultimate control
- ✓ 40km/h proven 2 speed hydrostatic transmission for smooth and efficient operation
- ✓ Cab suspension options available

**MIN TO MAX CAPACITY**



**DUMPER**



**KEY FEATURES**

- ✓ Dual view cab for bidirectional work
- ✓ 180° Hardox lined swivel body
- ✓ 3 mode 4-wheel steering
- ✓ 2 Speed EPD\* hydrostatic transmission
- ✓ 40 km/h max speed

\*Eco Power Drive - up to 18% fuel savings

**CONSTRUCTION RANGE**



ELECTRIC TELEHANDLERS	EW25.5-60	EW25.5-90
Maximum load capacity (kg)	2500	2500
Lift height (m)	4,8	4,8
Unladen weight (kg)	4950	4950
Front standard tyres	AS 504 10,0/75-15,3 18PR	AS 504 10,0/75-15,3 18PR
Rear standard tyres	AW702 10,0/75-15,3 18PR	AS 504 10,0/75-15,3 18PR
Width (mm)	1540	1540
Height (mm)	1975	1975
Length (mm)	3320	3320
Turning radius to the frame (mm)	2850	3250
Engine	2 x Electrical	3 x Electrical
Battery (type and V)	Lead-acid - 48 V	Lead-acid - 48 V
Nominal capacity	960 Ah	960 Ah
Engine power (kW/HP)	44/60	66/90
Maximum speed (km/h)	25	25
Traction	2WD, 3 traction modes	4WD, 3 traction modes
Autonomy (hours)	8h	8h
Recharge time (hours)	9h (220V)	9h (220V)
Hydraulic pump	G+FS	G+FS
Delivery/pressure (l/min-bar)	42 l/min (210 bar)	42 l/min (210 bar)
FOPS level I and ROPS	✓	✓

COMPACT TELEHANDLERS	P27.6PLUS	TF30.9-G	TF33.7-G
Max. capacity (kg)	2700	3000	3300
Lifting height (m)	5,9	8,6	6,6
Unladen weight (kg)	4850	7100	6400
Standard tires	12-16.5	405/70-24	405/70-24
Width (mm)	1860	2100	2100
Height (mm)	1960	2170	2170
Length (mm)	3910	4330	4310
Boom side shift (mm)	-	-	-
Frame levelling (%)	-	-	-
Engine	Rehiko 2504 TCR	Rehiko KDI 2504 TCR	Rehiko KDI 2504 TCR
Anti-pollution technology Stage V	DPF+DOC	DPF+DOC	DPF+DOC
Displacement/Cylinders (l)	2.5/4	2.5/4	2.5/4
Engine power (kW/HP)	55,4/75,1	55,4/75,1	55,4/75,1
EPD	-	✓	✓
Number of speeds	1	2	2
Max. speed (km/h)	40	40	40
Hydraulic pump	G	G	G
Flow/pressure (l/min-bar)	95 - 210	98 - 210	98 - 210
ASCS	-	-	-
ROPS-FOPS level II	✓	✓	✓
Cab suspension	-	-	-

MEDIUM CAPACITY TELEHANDLERS	TF38.10-116	TF42.7-116
Max. capacity (kg)	3800	4200
Lifting height (m)	9,5	7
Unladen weight (kg)	8300	7800
Standard tires	400/70-24	400/70-24
Width (mm)	2310	2310
Height (mm)	2530	2530
Length (mm)	4760	4730
Boom side shift (mm)	-	-
Frame levelling (%)	-	-
Engine	Perkins 904J	Perkins 904J
Anti-pollution technology Stage V	SCR+DPF+DOC	SCR+DPF+DOC
Displacement/Cylinders (l)	3.6/4	3.6/4
Engine power (kW/HP)	85,9/116,8	85,9/116,8
EPD	✓	✓
Number of speeds	2	2
Max. speed (km/h)	40	40
Hydraulic pump	LS+FS	LS+FS
Flow/pressure (l/min-bar)	151-250	151-250
ASCS	Light	Light
ROPS-FOPS level II	✓	✓
Cab suspension	-	-

DUMPER	DM9
Unladen weight (kg)	8100
Max. operating capacity (kg)	9000
Heaped volume ISO 6483	4,9 m³
Max. tipping angle	75 °
Skip rotation	± 90°
Fuel tank capacity (l)	200
Engine	Deutz TCD3.6
Engine power(kW/HP)	74,4/100
Maximum speed (km/h)	40
Standard tyres	18-19.5
Height (mm)	2880
Length (mm)	4920
Width (mm)	2335
Anti-pollution technology Stage V	SCR+DPF+DOC
Displacement/Cylinders (l)	3.6/4
EPD	✓
ROPS Cab	✓
Permanent four-wheel drive	✓
Number of gears	2

FIND YOUR LOCAL  
MERLO DEALER



FIND YOUR LOCAL  
MERLO DEALER

