



SEL IN **SWIMMING POOL ELECTROLYSER**

Compact and efficient salt treatment

- Ultra compact & easy install
- 4 operating modes + 2 Boost modes
- Pool-Terre included
- Low salinity 3g/L
- Cell guaranteed "Long Life" 10 000h

NEW 2024

30g/h for 120m³

WARRANTY
Control panel + Cell **5 YEARS**

5 VERSIONS AVAILABLE

6 operating modes

Cover	Spring	Summer	Comfort	Boost	Boost ++
25%	50%	75%	100%	150%	300%

Efficiency and longevity in an ultra compact system, the Sel-In comes with a set of essential accessories for easy installation and maintenance.

As a new generation electrolyser, the Sel In is a concentration of advanced technologies in a compact electrolysis cell with on-board electronics.

The Sel In puts aside all the frills to focus on the essential components that define the quality of an electrolyser. This approach allows it to remain as accessible as possible.

The electronics of this new generation salt chlorinator are integrated into the cell to facilitate installation. A cell that is nevertheless ultra-compact in order to place the device in the smallest possible space.

As for the leading electrolyses on the market, the electrolysis plates are made of titanium treated with ruthenium/iridium. 1mm in thickness guarantees them a life span of 10,000 hours.

Add to this a cell that is automatically cleaned with reverse the polarity. Poolex goes further to simplify annual maintenance by providing the necessary accessories for cleaning and winterizing the chlorinator.

The Sel In offers 6 operating modes calibrated according to the temperature of the pool water, including two boost modes and a manual "cover" mode only if your cover remains in place for more than 3 days.


The range is available in 5 models from 4g/h to 20g/h* to serve pools from 20 to 90 m3. In short, with the Sel In electrolyser you are at the service of all pool owners, above ground and in ground.

* Sodium hypochlorite (natural chlorine)


Accessories included




Intuitive use

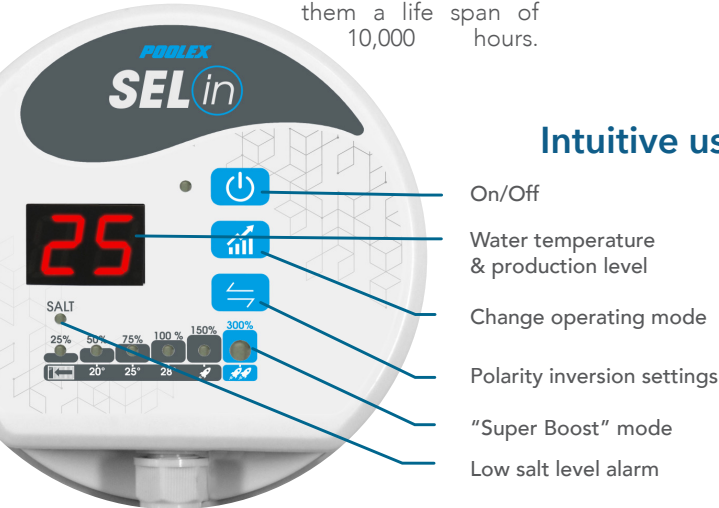

Use made easy

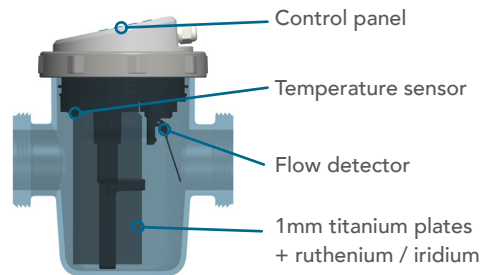

2 compact dimensions

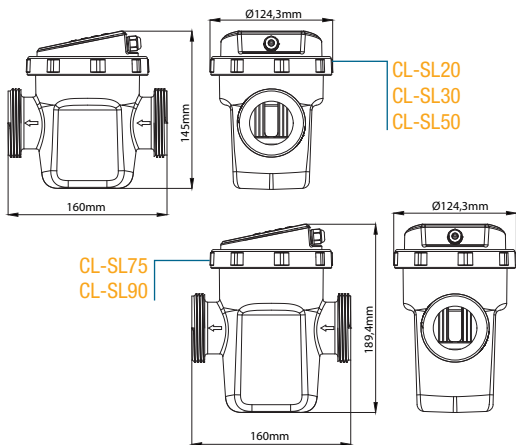

Reference	CL-SL20	CL-SL30	CL-SL50	CL-SL75	CL-SL90
Pool volume (m ³)	20	30	50	75	90
Production g/h	4	6	10	15	20
Connection	50mm to glue / adapters 32/38mm				
Salinity	3,5ppm				
Protection	IPX4				
Closed pool mode	Yes, manual				
Self-cleaning	With adjustable reverse polarity				
Alarms	Too much / not enough salt, water flow not fast enough				
Cell orientation	Horizontal or vertical				
Box dimensions	125 x 160 x 145 mm			125 x 160 x 190 mm	
Cell dimensions	Length 40cm with connectors - DN 50mm				
Modes	Automatic / Winterizing / Shock Chlorine				
Warranty	5 years: control panel + cell 10,000h				