
EnwaMatic® Mini Midi



Side stream filtration and water treatment for smaller heating and cooling systems





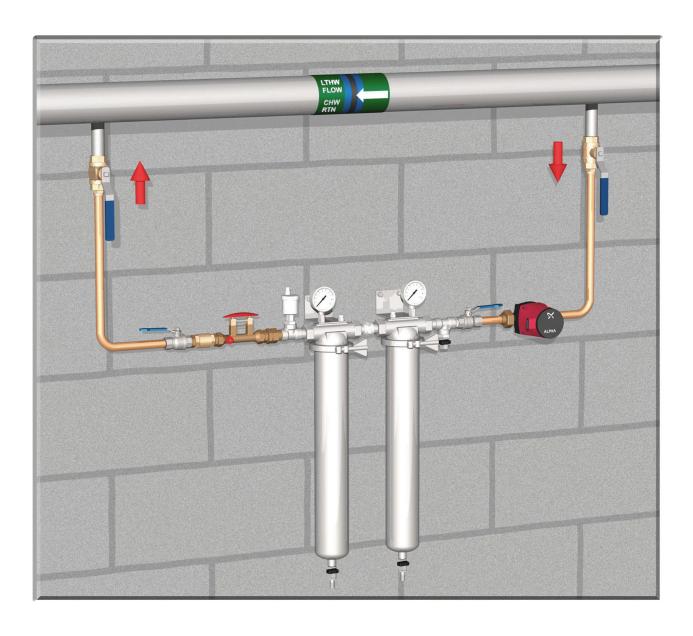



Side stream filtration to < 10 microns



Corrosion inhibition



Scale control



pH regulation (9.0 - 10.5)



Air separation




Restriction of bacterial growth







- Increases energy efficiency
 - **E** Reduces maintenance cost
 - Green technology
 - Improves Health & Safety

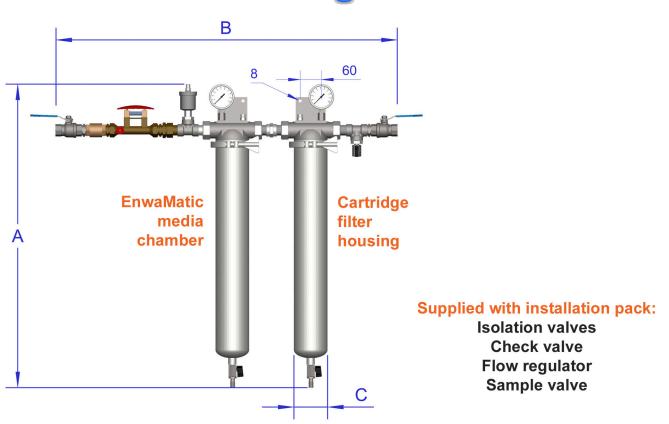

Model	System Volume (Litres)	Flow (I/min)	Pipe Size (BSP)	A (mm)	B (mm)	C (mm)	Weight Empty (kg)	Weight Service (kg)	Clearance below (mm)
EM Mini	0 - 500	3 5	3/4"	510	900	86	7.4	8.7	415
EM Midi	500 - 1200		3/4"	760	900	86	9.4	12.1	665

Max Operating Pressure: 10 bar Max Operating Temperature: 85 C

Glycol compatible to 40%

Filtration only options for systems with Aluminium components