

Jackery Explorer 1000 v2

The Lightest, Smallest LFP 1kWh Portable Power Station



Lighter

Easier to Store. Easier to Carry.

20% **10.8kg**
Smaller Weight



Faster

Emergency Super Charge

59-Min **3.8-Hour**
Ultra-fast AC Full Charge (0-100%) Solar Full Charge (2 × 200W Panels)



4,000
Life Cycles
LiFePO₄ Battery

More Powerful
CHARGESHIELD 2.0



RCM Safety
Certified

RCM



Dual USB-C
Charging
Up to
100W
Output

1500W
Rated Output


3000W
Peak Output

UPS
≤20ms




Package List

1

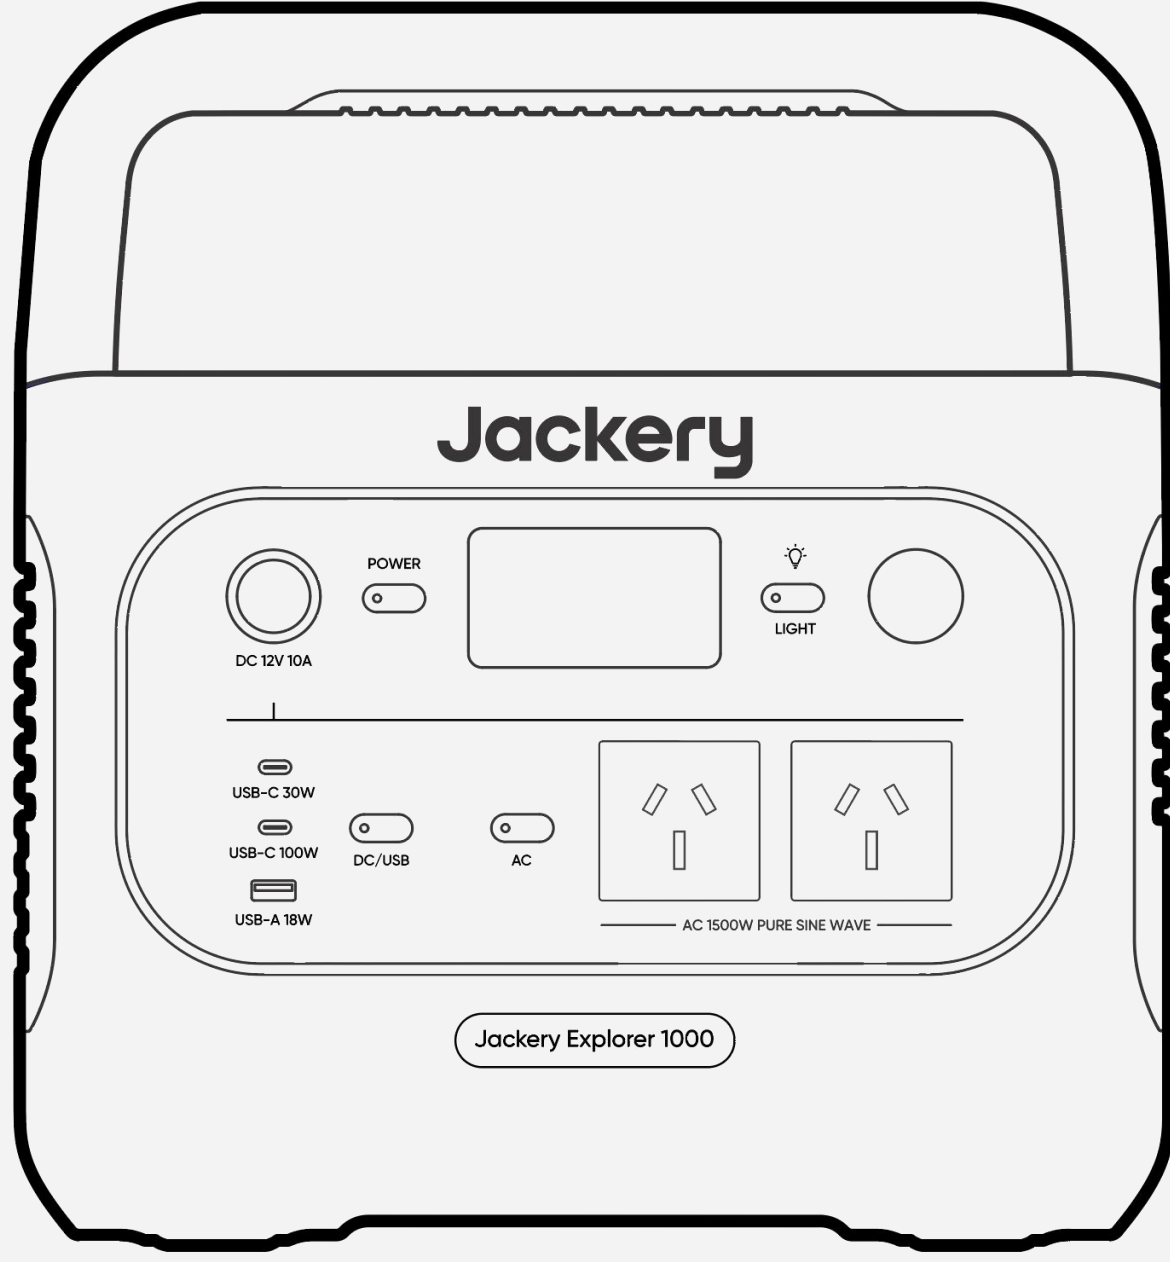


1000 v2

2

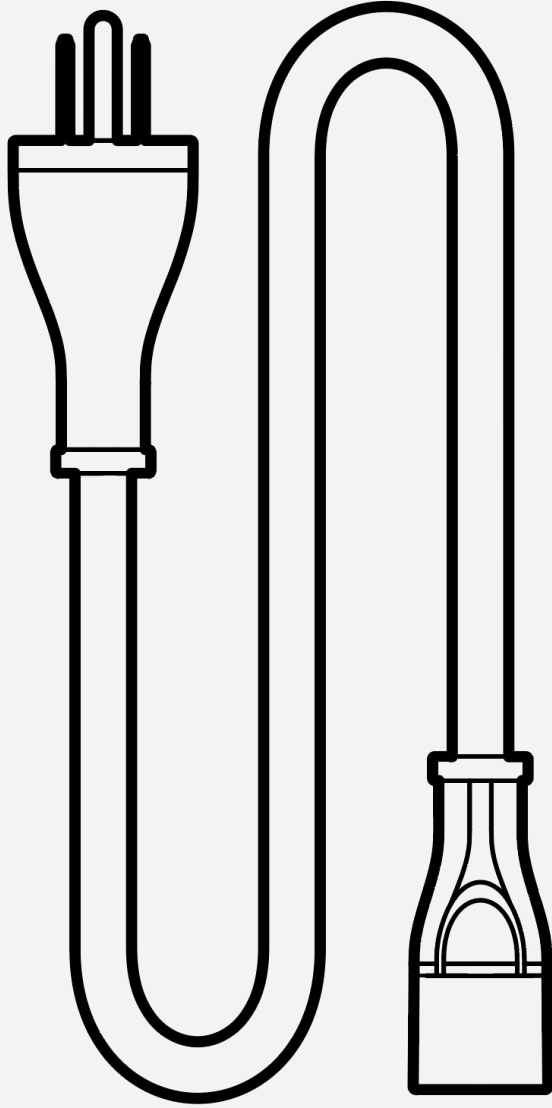

AC Charging Cable

3

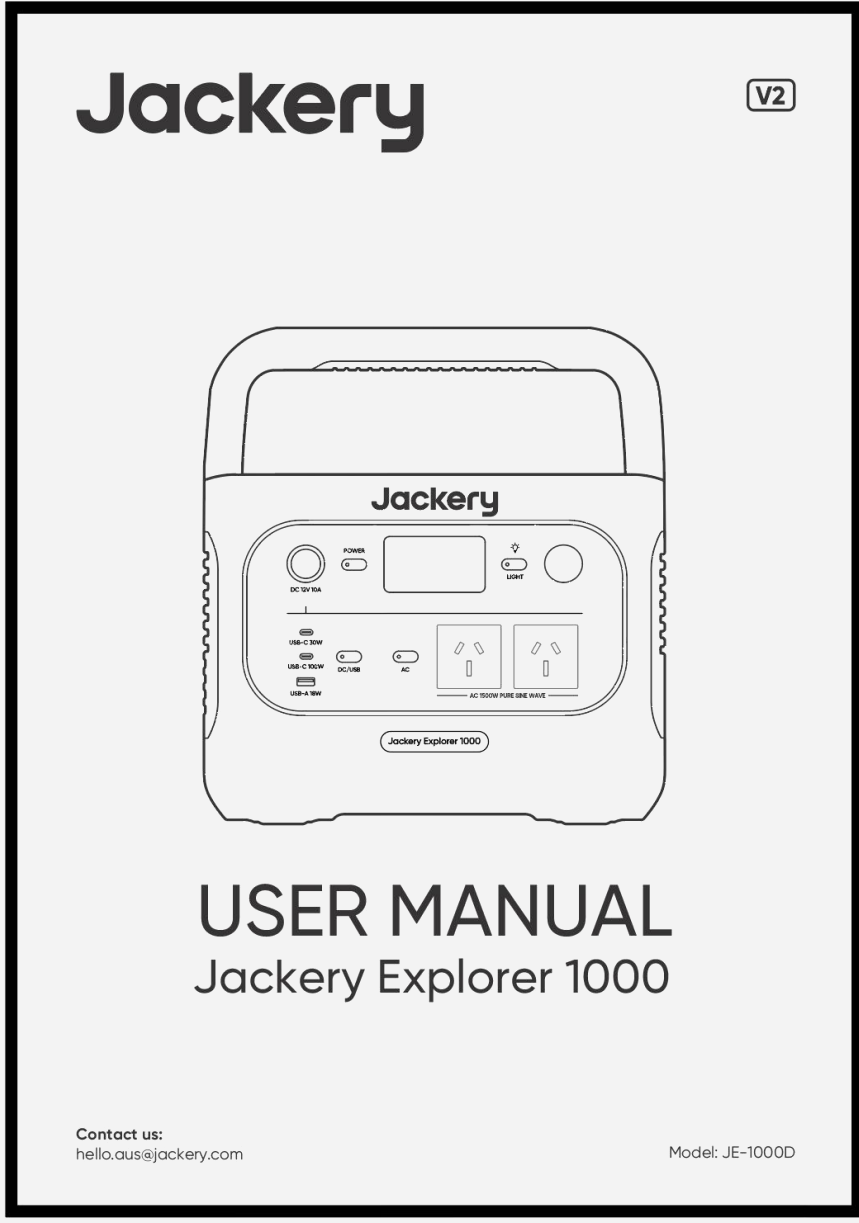

User Manual

Tech Specs

General Info		Output Ports	
Capacity	30.4Ah / 35.2V DC (1,070Wh)	2 x AC Output	230V~ 50Hz
Cell Chemistry	LiFePO ₄	AC Total Output	1,500W Rated, 3,000W Peak
Weight	10.8 kg	USB-C1 Output	30W Max, 5V==3A, 9V==3A, 12V==2.5A, 15V==2A, 20V==1.5A
Dimensions	32.7 × 22.4 × 24.7cm	USB-C2 Output	100W Max, 5V==3A, 9V==3A, 12V==3A, 15V==3A, 20V==5A
Cycle Life	4000 cycles to 70%+ capacity	USB-A Output	18W Max, 5-6V==3A, 6-9V==2A, 9-12V==1.5A
Input Ports		Other Specifications	
DC Input	2 x DC 8mm Ports: 12-16V(Working Voltage)==8A Max, Double to 8A Max; 16-60V(Working Voltage)==10.5A Max, Double to 21A/400W Max	Car Port	12V==10A
AC Input	220V-240V~ 50Hz, 10A Max	Charge Temperature	0°C~45°C
		Discharge Temperature	-10°C~45°C
		Warranty	3 + 2 Years

Add : 39 Antibes Street, Parkdale Victoria 3195, Australia
Customer Support : hello.aus@jackery.com
PR & Influencer : marketing.au@jackery.com
Distributors : jackerydealer@jackery.com

Jackery Australia Pty Ltd.

