

Jackery Explorer 2000 Plus

Expandable Capacity, Always Prepared



Long-Lasting Reliability

LiFePO₄ Battery
4,000 Cycles to 70%+ Capacity



Safety-First



High-level FCC/CE certification, powering home appliances uninterruptedly.



UL Certified Safety with ChargeShield Technology



Innovative ChargeShield Technology, 62 forms of protection.

Sustainable Next-Gen Generator



Advanced IBC Solar Technology




Whisper-Quiet Operation



Emission Free


Package List

1

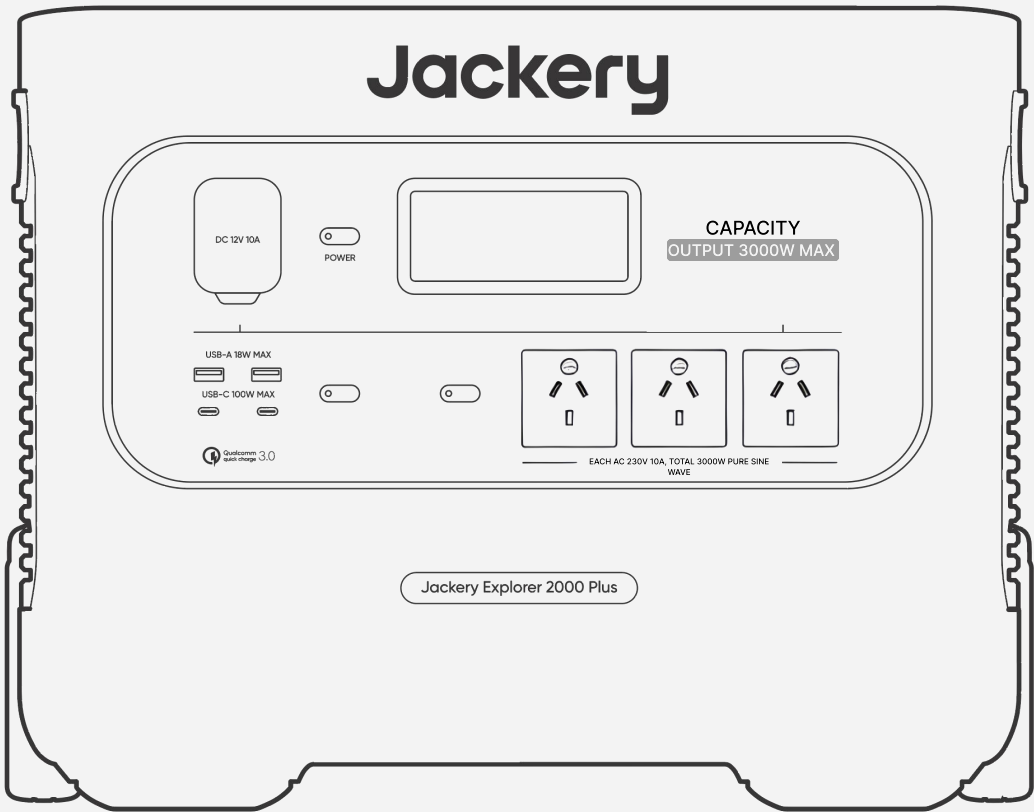


Jackery Explorer 2000 Plus

2

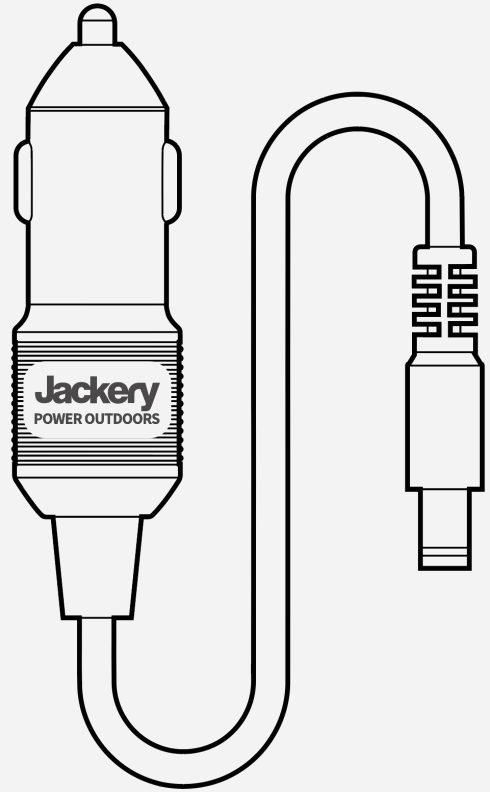


Car Charge Cable

3

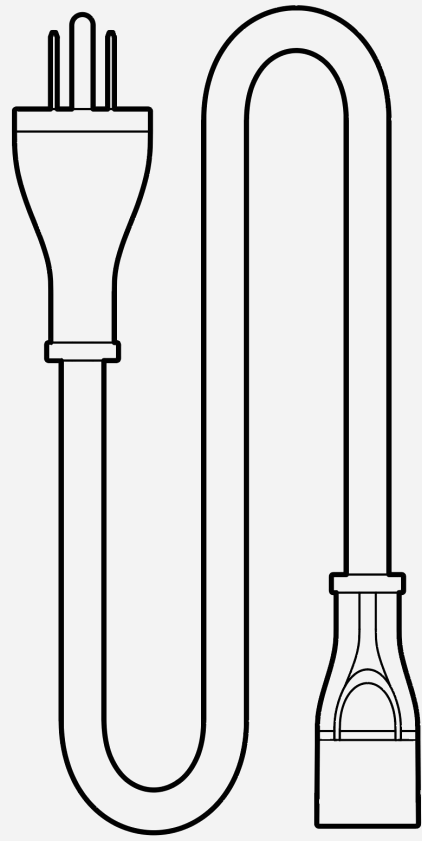


AC Charge Cable

4

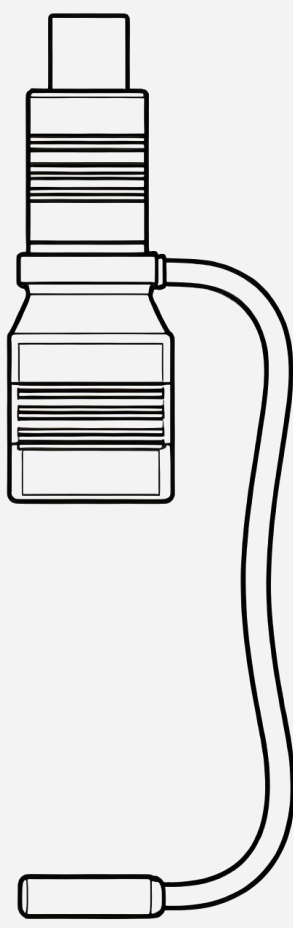


DC7909 to DC8020 Adaptor x 2

5

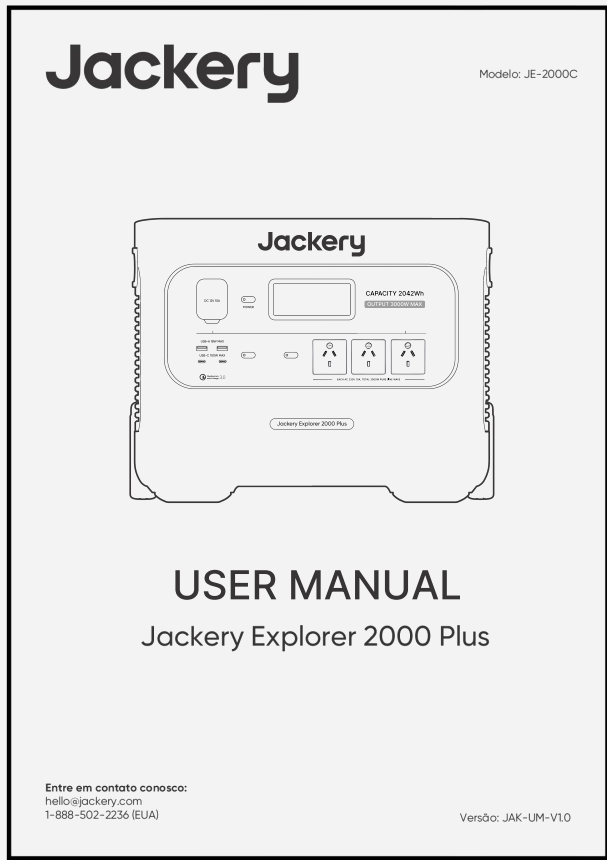

User Manual

6

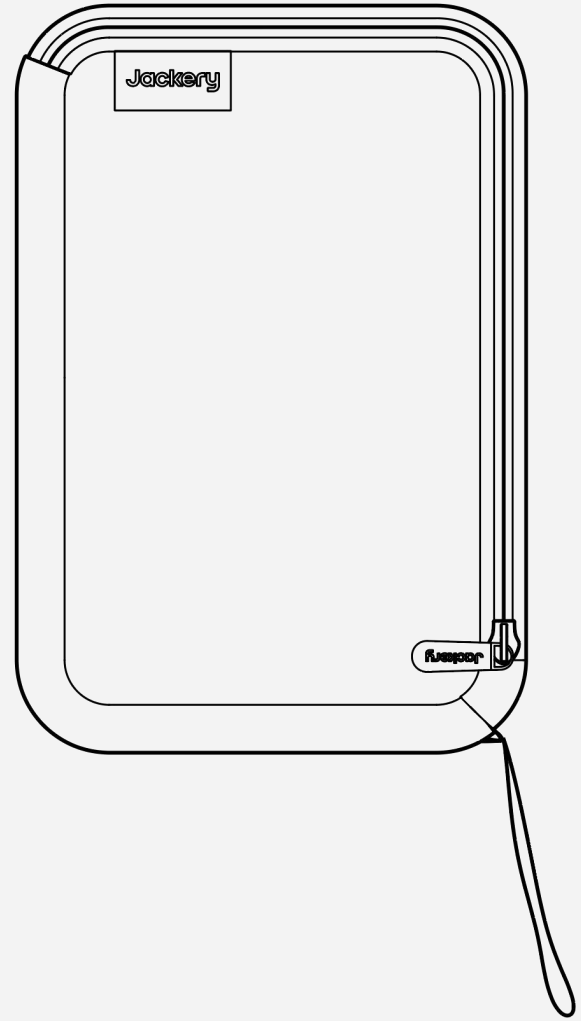

Accessories Bag

Tech Specs

General Info		Output Ports	
Capacity	45.6Ah / 44.8V DC (2,042.8Wh)	3x AC Output	230V~, 50Hz 10A Max per Outlet
Cell Chemistry	LiFePO ₄	AC Total Output	3,000W Rated, 6,000W Peak
Weight	27.9 kg	2x USB-C Output	100W Max, 5V≡3A, 9V≡3A, 12V≡3A, 15V≡3A, 20V≡5A
Dimensions	47.3 × 35.94 × 37.36 cm	2x USB-A Output	Quick Charge 3.0, 18W Max, 5-6V≡3A, 6-9V≡2A, 9-12V≡1.5A
Cycle Life	4000 cycles to 70%+ capacity	1x Car Port	12V≡10A Max
Input Ports		Operating Temperature	
AC Input	230V≡ 50Hz, 10A Max	Charge Temperature	0°C~45°C
DC Input	2x DC 8mm Ports: 11-17.5V (Working Voltage)≡8A Max, Double to 8A Max; 17.5-60V (Working Voltage)≡12A Max, Double to 24A/1400W Max	Discharge Temperature	-10°C~45°C
Expandable Capacity	Up to 12kWh	Charging Time	
Max Solar Input	1,400W	AC Charging Time	1.7 Hours
		Warranty	3 + 2 Years

Add : 39 Antibes Street, Parkdale Victoria 3195, Australia
Customer Support : hello.aus@jackery.com
PR & Influencer : marketing.au@jackery.com
Distributors : jackerydealer@jackery.com

Jackery Australia Pty Ltd.

