

HH6205 · HH6210

Portable Thermal Inkjet Printer

 Simple & Flexible Installation

 Easy & Clean Operation


 Low-Cost & Zero Maintenance

 Hi-Res & Versatile Coding



HH6205B · HH6205BL

HH6210B · HH6210BL

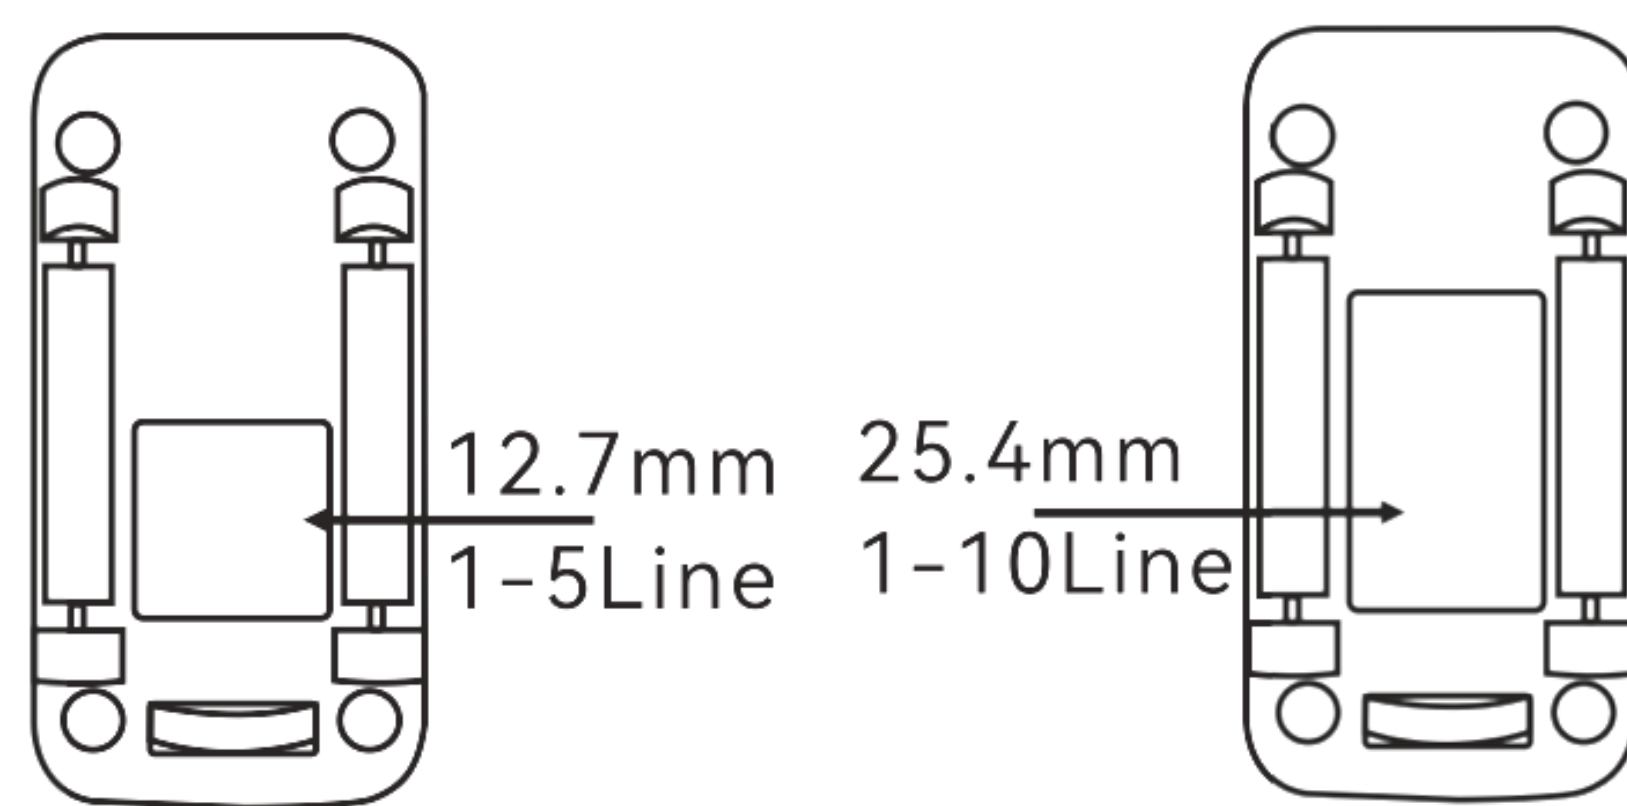


HH6205B · HH6210B

HH6205BL · HH6210BL

Handheld

Handheld

Inline

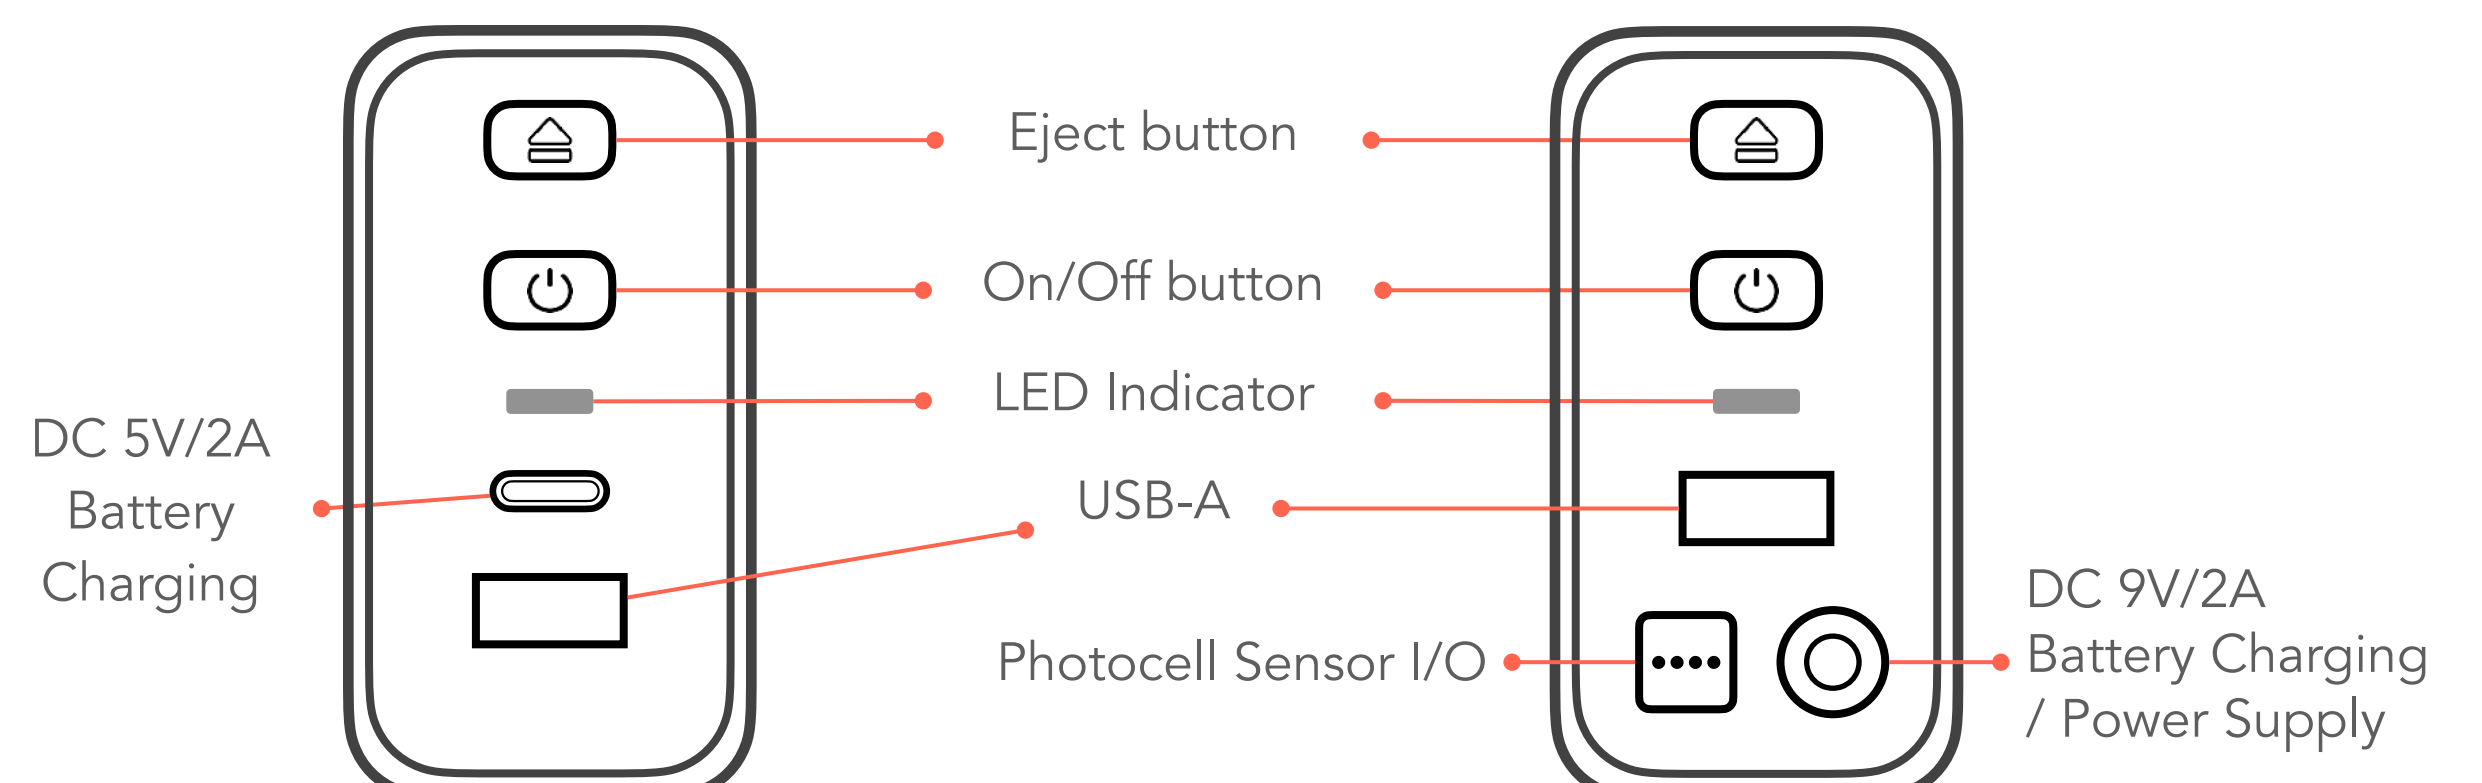

PRINTER SYSTEM

DISPLAY	4.3" HD Touch Screen	
OPERATION SYSTEM	LINUX OS	
SYSTEM LANGUAGES	English German French Italian Spanish Portuguese Slovenian Serbo-Croatian Czech Bulgarian Romanian Polish Greek Hungarian Russian Ukrainian Slovak Arabic Persian Turkish Chinese Traditional-Chinese Japanese Korean Hindi Thai Vietnamese Indonesian Burmese ~ Available languages vary for different regions	
EMBEDDED MEMORY	128M	
STATUS ALARM	Green: Ready Blue: Printing Red: Alarm	
BATTERY	2600mAh #18650 lithium ion batteries x 2 Operating time up to 16 hours	
WORKING ENVIRONMENT	Storage: -20°C-55°C Working: 5°C-35°C Humidity: 10%-80%	
APPLICATION MODE	HANDHELD	INLINE
POWER PORTS	USB-C 5V/2A Battery Charging	DC 9V/2A Battery Charging / Power Supply
I/O PORTS	USB-A	USB-A, Sensor Port
EXTERNAL POWER ADAPTER	—	IN: AC 100-240V / OUT: DC 9V 2A
ACCESSORIES	Ink Cartridge *1 U-Disk *1, Detachable Auxiliary Roller *1, Positioning Plate *1 USB Charging Cable *1	Ink Cartridge *1 U-Disk *1, Detachable Auxiliary Roller *1, Positioning Plate *1 AC/DC Power Adaptor *1 Photocell Sensor *1

PRINTING FEATURES

TECHNOLOGY	THERMAL INKJET PRINTING TECHNOLOGY	
CODING & MARKING TYPE	Text, Numbers, Images, Logo, 2D codes, Barcodes, Dates, Counter, Database and etc.	
IMAGE FORMATS	JPG, JPEG, PNG, BMP	
BARCODE FORMATS	Code128, Code39, EAN8, EAN13, UPCA, ITF(2of5), UPCE	
2D CODE FORMATS	QR, DataMatrix	
FONTS	True type fonts, Dot-matrix fonts	
PRINTABLE MATERIALS	Water based ink for porous and semi porous substrates: Paper/Corrugated box/Wooden/Fiberboard/Cotton and etc. Solvent based ink for semi porous and non porous substrates: Plastic/Glass/Metal plates/Alu-foils/Cables, and etc.	
INK THROW DISTANCE	2mm-5mm (Distance between nozzle plate and print object)	
GRAY LEVEL OPTIONS	1-5	
INK CARTRIDGES COLORS	Water-based (42ml*1), Color options: Black, Cyan, Magenta, Yellow Solvent-based (42ml*1), Color options: Black, Cyan, Magenta, Yellow, White, Green	
PRINT HIGHT	2.5mm-12.7mm (1-5 Lins)	2.5mm-25.4mm (1-10 Lines)
RESOLUTION	600 / 300 dpi	300 dpi
MAX PRINT SIZE	12.7mm * 406mm	25.4mm * 406mm
MAX PRINT SPEED	30m / min	15m / min

PRODUCT MODELS

MODEL NAME :	HH6205B	HH6205BL	HH6210B	HH6210BL
PRINTHEAD	Half-inch	Half-inch	One-inch	One-inch
OPERATING MODE	Handheld mode only	Handheld / Inline mode	Handheld mode only	Handheld / Inline mode
POWER PORTS	DC 5V/2A	DC 9V/2A	DC 5V/2A	DC 9V/2A
I/O INTERFACE	USB	USB, Sensor Port	USB	USB, Sensor Port
DIMENSION	208mm*113mm*45mm		208mm*133mm*45mm	
WEIGHT	410g		420g	
PACKAGING	275mm*115mm*250mm 1750g		275mm*115mm*250mm 1760g	

Zhuhai Bentsai Electronics Co.,Ltd.

www.bentsai.com

info@bentsai.net



Scan to learn more about
HH6205 · HH6210 series

